


5 cm

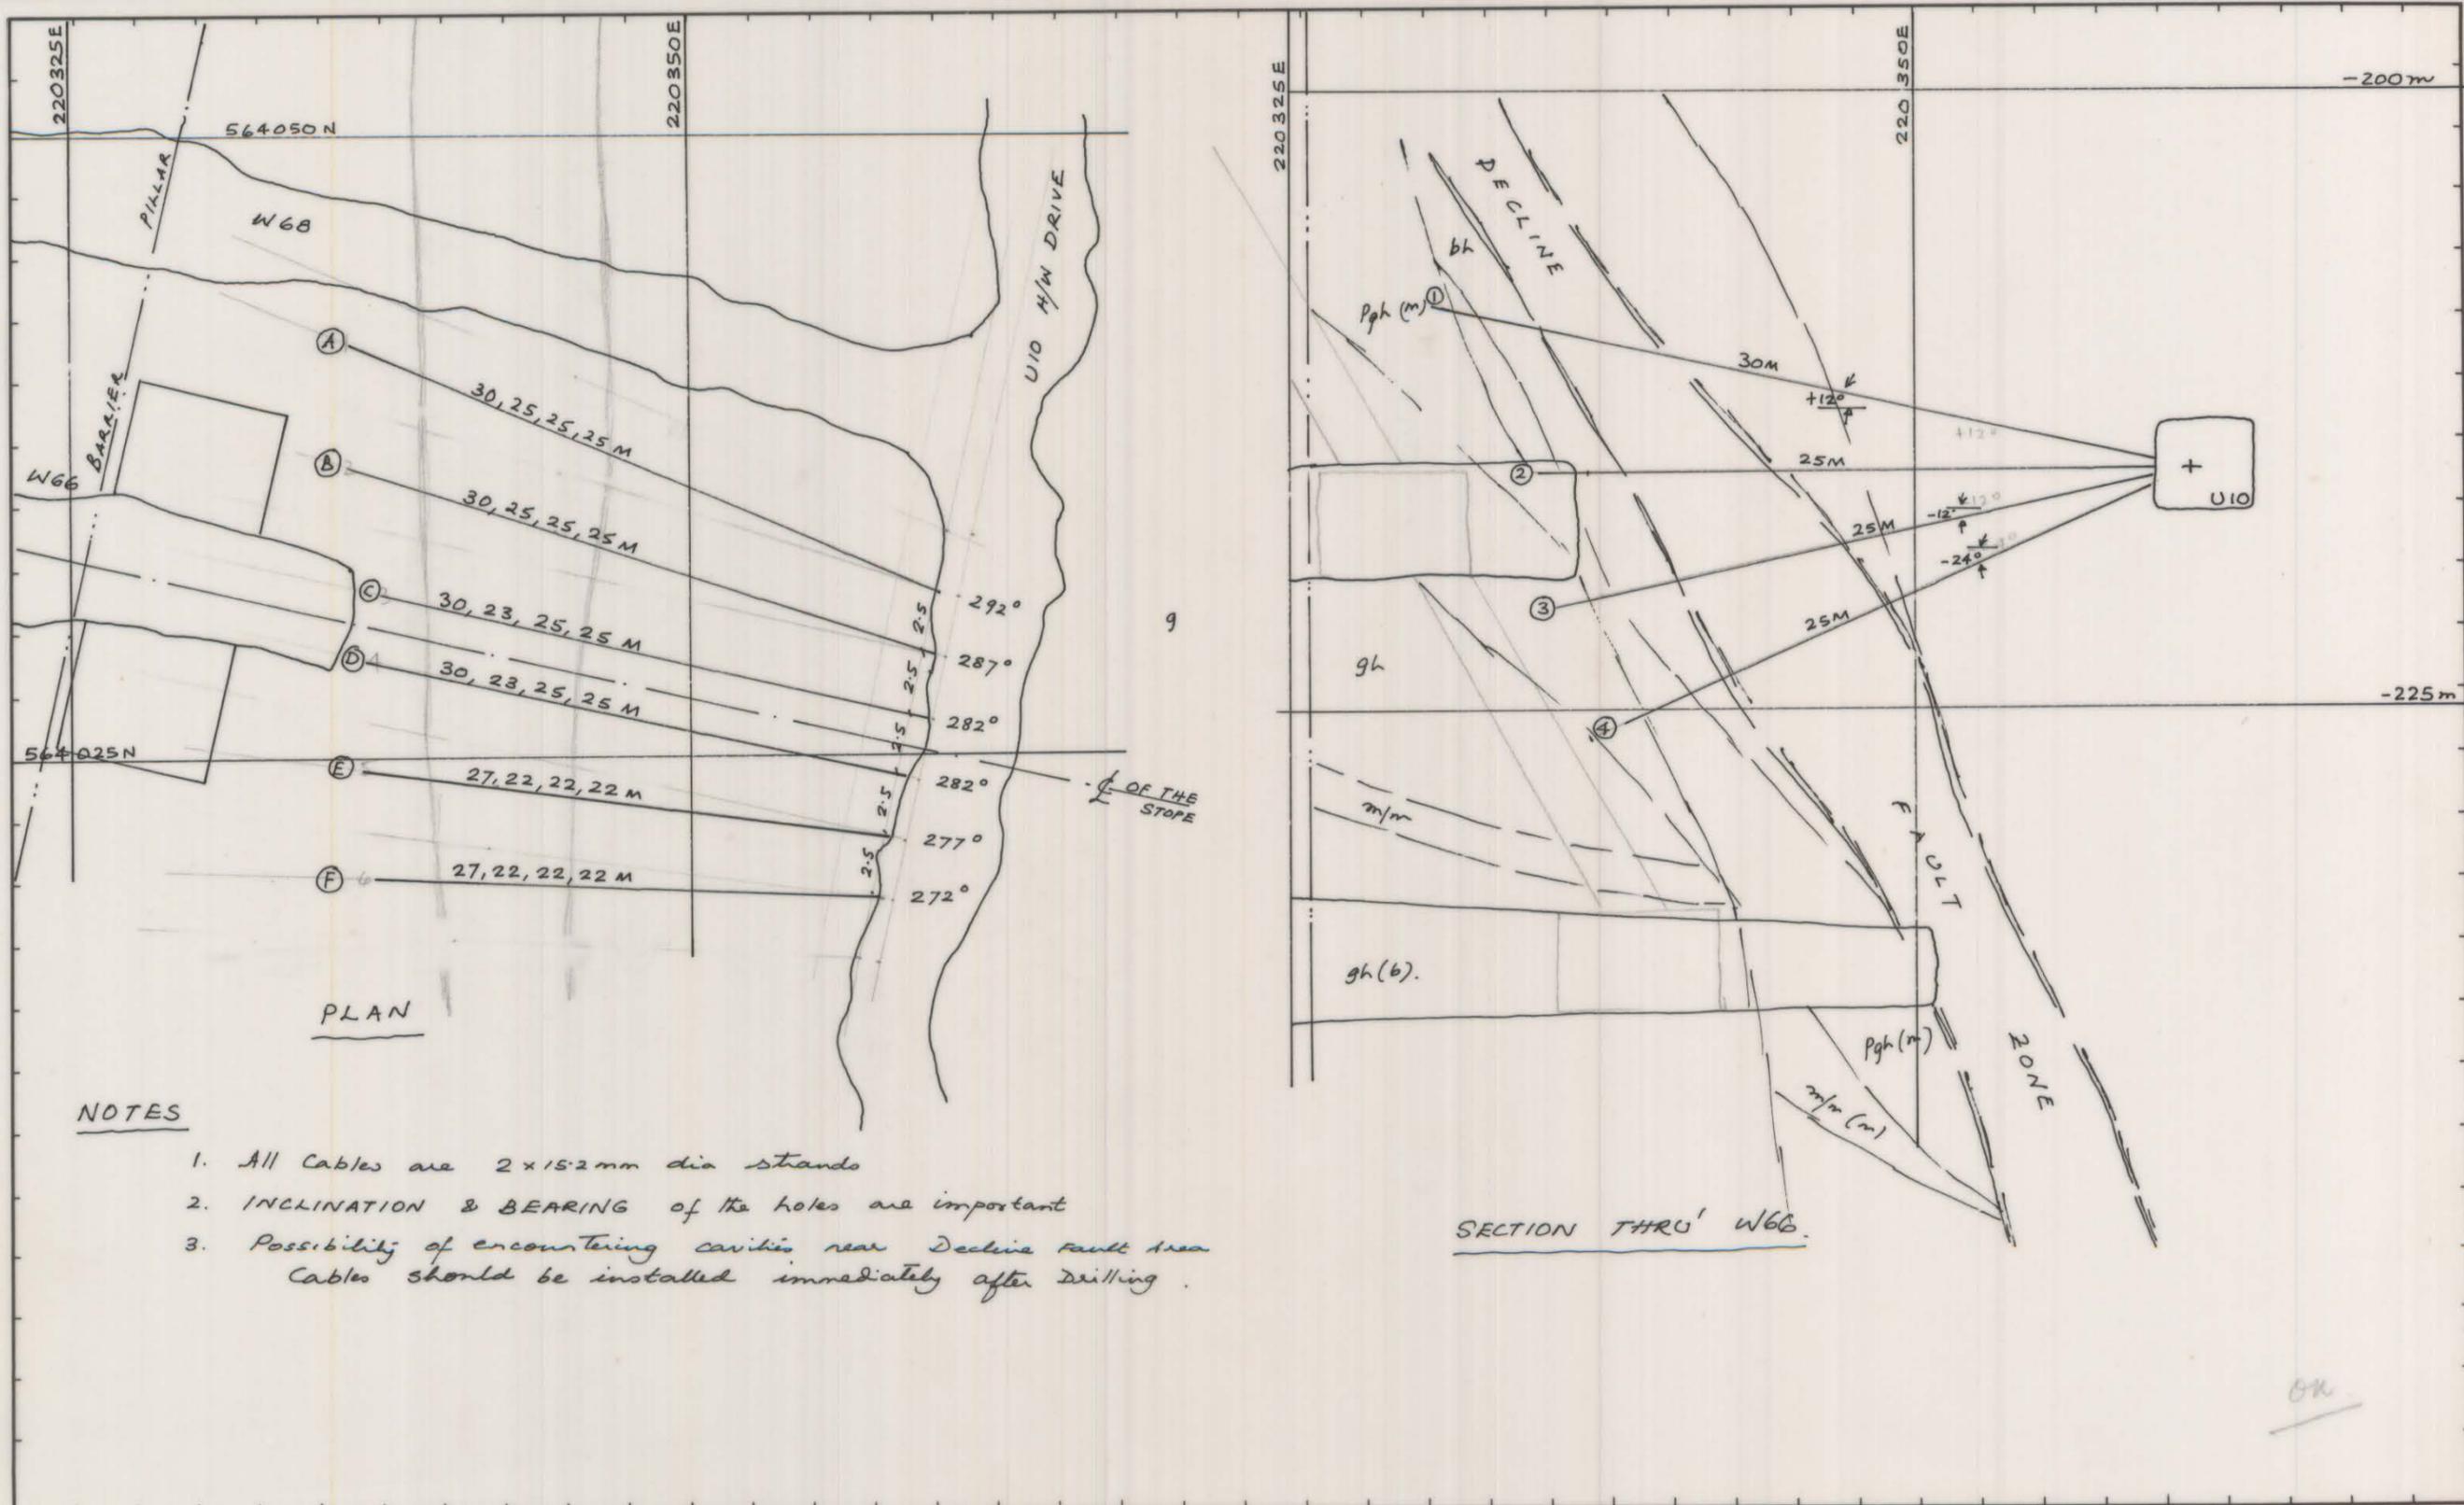

PLAN

SECTION THRU' W66

NOTES

1. All Cables are 2 x 15.2 mm dia strands
2. INCLINATION & BEARING of the holes are important
3. Possibility of encountering cavities near Decline Fault Area
Cables should be installed immediately after Drilling.

TOTAL CABLES :

22 M x 6	=	132 M
23 M x 2	=	46 M
25 M x 10	=	250 M
27 M x 2	=	54 M
30 M x 4	=	120 M
		<u>602 M</u>

Av. Density
 3.75 m² / 7.5 m² at 1 m for
 3.75 m² at Outer face
 @ cable.

REF PLAN

GEOLOGY	
SURVEY	
PLANNING	
ROCK MEC.	<i>dlw</i> July 82
GRADE CON.	
DRAFTING	
T.S.S.	

SCALE 1: 250

KIS KING ISLAND SCHEELITE
 GRASSY KING ISLAND

DOLPHIN MINE
 SUPPORT SYSTEM FOR H/W
 DRIVE W66 STOPE
 AT -220m RL.

DRAWING NUMBER 07DM09.5-3013