0374_3017

5 cm

DEMEC GAGE

STATION № SP-4

TYPE No. 1487 Cement and Concrete Assoc.

DATE OF INSTALLATION .....

№ OF PINS .....

CALIBRATION FACTOR 1 division = 6.68 με

LOCATION DOLPHIN MINE -150m level

..... EAST

..... NORTH

..... m R.L.

DIAGRAM:

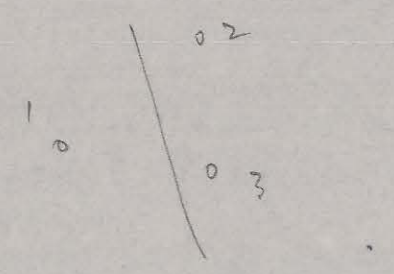

Surface mounted – could be changed to grouted pins

DATE	DAY	DISTANCE BETWEEN STAT. 1 - 2	1 - 3	3 - 2	CALIBRATION	REMARKS
11.5.1981		1211	968	932	948	
18.5.81		1074	970	936	949	POINT 1 FELL OFF
26.5.81		1257	759	918	949	POINT 1 REPLACED
28.5.81		1236	771	939	949	
1.6.81		1245	778	928	949	
3.6.81		1248	774	922	950	
11.6.81		1247	751	919	949	
19.6.81		1243	774	915	949	
1.7.81		1248	753	928	949	
23.10.81		1275	711	905	949	
30.10.81		1302	732	937	948	
20.11.81		1292	746	932	949	
11.5.82		1299	725	935	949	
12.7.82		1299	733	932	948	
20.7.82		1243	721	887	949	
3.8.82		1217	800	926	949	
25.8.82		1219	785	941	948	
31.8.82		1198	767	930	949	
14.9.82		1210	763	927	950	
2.11.82		1204	761	931	954	
9.11.82		1285	784	957	941	
16.11.82		1415	826	915	949.	
22.11.82		1310	763	932	948	
6.12.82		1310	760	982	950	
13.12.82		1310	759	983	950	

DATE	DAY	DISTANCE BETWEEN STAT. 1 - 2	1 - 3	3 - 2	CALIBRATION	REMARKS
8.2.83						POINT 1 FALLEN OFF.
18.2.83						" "