

0374\_3038

5 cm

NUMBER 1 cont. Flags on 75m Level

INSTALLATION DETAILS:

PILLAR W2775  
 LIFT 4  
 R.L. 116.38  
 BEARING 113°  
 DATE 6-4-77

CALIBRATION


0.001 volts = 0.03 mm <sup>x30</sup>

ROD LENGTHS

NUMBER	LENGTH
<u>1</u>	<u>2.7m</u>
<u>2</u>	<u>2.7m</u>
.....	.....
.....	.....

TRANSVERSE  
MONITORING  
UNIT

DIAGRAM

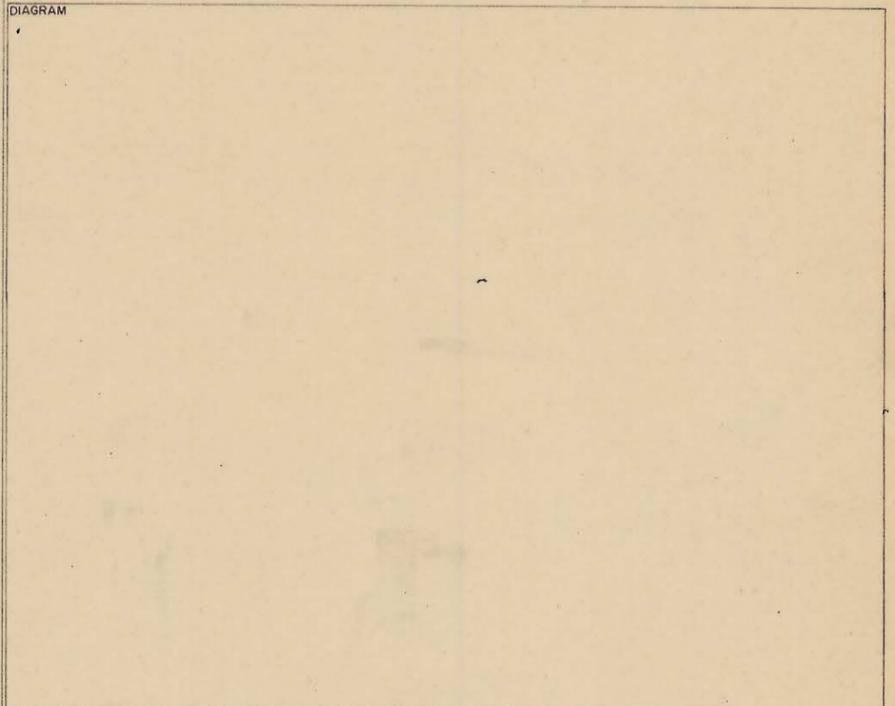

READINGS 0.919 0 -4.47 0.805 0 -7.47

DATE	ROD 1			ROD 2			ROD .....	ROD .....
	V	ΔV	Δmm	V	ΔV	Δmm		
9-12-80	0.796	-0.123	-8.16	0.694	-0.111	-10.8		
31-12-80	0.797	-0.122	-8.13	0.698	-0.107	-10.68		
6-1-81	0.785	-0.134	-8.49	0.685	-0.120	-11.07		
20-1-81	0.796	-0.123	-8.16	0.695	-0.110	-10.77		
28-1-81	0.786	-0.133	-8.46	0.699	-0.106	-10.65		
2-2-81	0.63	-0.289	-13.14	0.90	-0.095	-10.32	VERY WET READINGS	
10-2-81	0.51	-0.409	-16.74	0.68	-0.125	-11.22		
24-2-81	0.783	-0.136	-8.55	0.684	-0.121	-11.10		
3-3-81	0.784	-0.135	-8.52	0.685	-0.120	-11.07		
9-3-81	0.57	-0.349	-14.94	0.71	-0.095	-10.32		
<del>9-4-81</del>	REPAIR READOUT			BOX			REPAIRED	
9-4-81	0.743	-0.176	-9.75	0.749	-0.056	-9.15		
21-4-81	0.747			0.753				
28-4-81	0.757			0.765	-0.040	-8.67		
6-5-81	0.757			0.767	-0.038	-8.61		
13-5-81	0.757			0.766				
20-5-81	0.754	-0.165	-9.42	0.762				
27-5-81	0.757			0.764	-0.041	-8.70		
30-6-81	0.759			0.765	-0.040	-8.67		
7-7-81	0.757			0.765	-0.040	-8.67		
14-7-81	0.757			0.765	-0.040	-8.67		
21-7-81	0.759	-0.160	-9.27	0.765	-0.040	-8.67		
28-7-81	0.757			0.767	-0.038	-8.61		
4-8-81	0.757			0.767	-0.038	-8.61		
11-8-81	0.755			0.767	-0.038	-8.61		
18-8-81	0.755			0.763				
25-8-81	0.756			0.762				
1-9-81	0.757			0.767	-0.038	-8.61		
8-9-81	0.757			0.767	-0.038	-8.61		
15-9-81	0.756			0.766				
13-10-81	0.758	-0.161	-9.30	0.767	-0.038	-8.61		
20-10-81	0.758	-0.161	-9.30	0.768				
27-10-81	0.755	-0.164	-9.39	0.764	-0.041	-8.70		