


TAPE EXTENSOMETER

STATION N° TES 5
 TYPE INTERFELS CONV. METER
 DATE OF INSTALLATION
 ANCHORAGE SYSTEM FULLY GROUTED
 or
 POINT ANCHORED

DOLPHIN MINE
 LOCATION 220 LEVEL W64
 220329.4 EAST
 564018.2 NORTH
 220329.4 R.L.
 12° BEARING

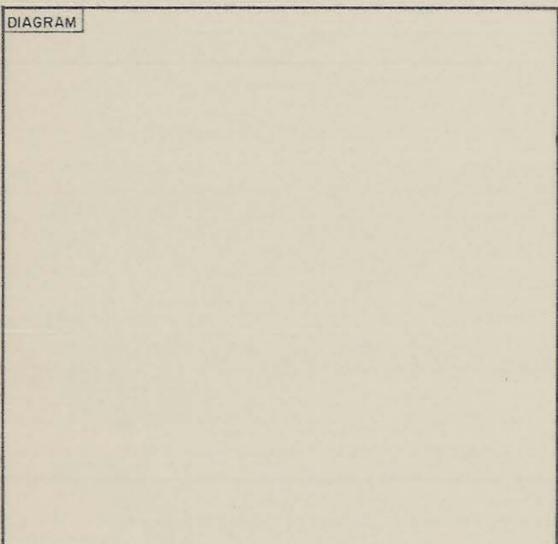

NOTE * Bar Data.

DATE	DAY (2-6)	DISTANCE BETWEEN STATIONS IN METRES								CALIBRATION		REMARKS	
		1-7	1-6	1-5	1-4	7-1	7-2	7-3	7-4	AT START	AT END		
9-12-1981	3102	3.74641	4.05636	4.17500	4.37974	3.13985	4.05638	4.04106	4.33412	3.04023	0.22689	0.22690	
13-1-82	3137	3.74622	4.05666	4.17563	4.37910	3.13867	4.05668	4.04184	4.33494	3.04074	0.22644	0.22626	W62/-220 m-RL slipped
21-1-82	3145	3.74772	4.05627	4.17668	4.38063	3.13811	4.05625	4.04236	4.33545	3.04081	0.22783	0.22784	
9-2-82	3164	3.74759	4.05780	4.17646	4.38060	3.14084	4.05783	4.04110	4.33419	3.04020	0.22787	0.22784	
19-2-82	3174	3.74767	4.05698	4.17643	4.38070	3.13135	4.05700	4.04164	4.33538	3.03120	0.22775	0.22775	
26-2-82	3181	3.74791	4.05769	4.17711	4.38045	3.14071	4.05772	4.04198	4.33499	3.03136	0.22779	0.22779	
8-3-82	3191	3.74778	4.05709	4.17645	4.38060	3.13816	4.05706	4.04234	4.33522	3.04042	0.22781	0.22773	
15-3-82	3198	3.74757	4.05807	4.17653	4.38062	3.14092	4.05804	4.04140	4.33695	3.03146	0.22764	0.22768	(Tape has been shortened up 0.1m).
22-5-82	3205	3.74952	4.05857	4.17840	4.37232	3.14094	4.05859	4.04457	4.33738	3.03238	0.23081	0.23072	dial gauge jumped up.
29-3-82	3212	3.75087	4.06092	4.17841	4.37258	3.13396	4.06095	4.04352	4.33728	3.03357	0.23070	0.23062	Gauge recalibrated
5-4-82	3219	3.74949	4.05863	4.17815	4.37209	3.13340	4.05865	4.04360	4.33763	3.03378	0.22992	0.22986	
13-4-82	3227	3.74994	4.05811	4.17830	4.37222	3.14023	4.05818	4.04457	4.33695	3.03265	0.22993	0.22991	
20-4-82	3234	3.74976	4.05779	4.17868	4.37281	3.14072	4.05783	4.04451	4.33697	3.03266	0.22980	0.22985	cut-off nail 220-240 was fixed on 14-4-82.
26-4-82	3240	3.74966	4.05887	4.17865	4.37276	3.13367	4.05888	4.04357	4.33709	3.03563	0.22978	0.22979	
9-5-82	3247	3.74968	4.05884	4.17944	4.37334	3.14091	4.05889	4.04458	4.33722	3.03257	0.22968	0.22970	Cutoff slot mining complete on 29-4-82
10-5-82	3254	3.74965	4.05965	4.17956	4.37366	3.13463	4.05968	4.04318	4.33723	3.03311	0.22970	0.22972	Rings 3,4,5 W62 fixed at lunch time on 3-5-82
17-6-82	3292	3.74081	4.05870	4.17941	4.37402	3.13162	4.05873	4.04533	4.33625	3.03162	0.22958	0.22952	
29-6-82	3304	3.74936	4.05801	4.17965	4.37402	3.14155	4.05809	4.04537	4.33567	3.04100	0.22967	0.22967	6,7,8,9 fixed on 21/6
7-7-82	3312	3.74940	4.05852	4.17943	4.38395	3.14150	4.05830	4.04530	4.33565	3.04099	0.22967	0.22966	10,11 fixed on 6/7
13-7-82	3318	3.74935	4.05845	4.17948	4.38371	3.14060	4.05809	4.04550	4.33560	3.04080	0.22958	0.22951	
22-7-82	3327	3.74959	4.05855	4.17935	4.38383	3.14122	4.05839	4.04539	4.33569	3.04060	0.22966	0.22963	
28-7-82	3333	3.74974	4.05987	4.17971	4.38452	3.14481	4.05264	4.04592	4.33592	3.04373	0.22984	0.22984	
4-8-82	3340	3.74913	4.05839	4.17905	4.37332	3.13134	4.05538	4.04557	4.33557	3.03109	0.22950	0.22944	
17-8-82	3353	3.74896	4.05907	4.17925	4.37358	3.13395	4.04216	4.04581	4.33581	3.03209	0.22925	0.22925	
25-8-82	3361	3.74965	4.05849	4.17948	4.37428	3.13180	4.04333	4.04572	4.33572	3.03101	0.22981		dial gauge calibrated to 0.00750