

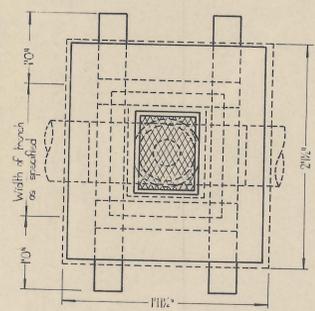


- Legend:
- M Main Pressure Water Main
 - S Septic Tank Connection
 - R Rain Water, Drinking Outlets
 - 1-2 Closets
 - 3 Urinal
 - 4-5 Basins
 - 6 Shower
 - 7 Sink

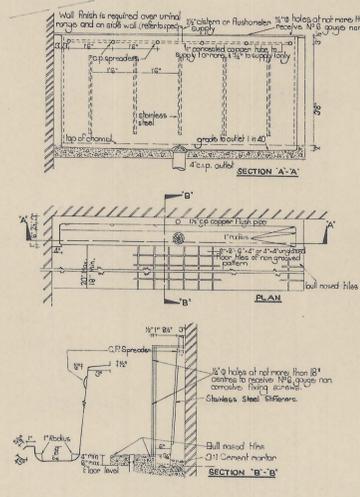

DETAIL OF FIRE PLUG

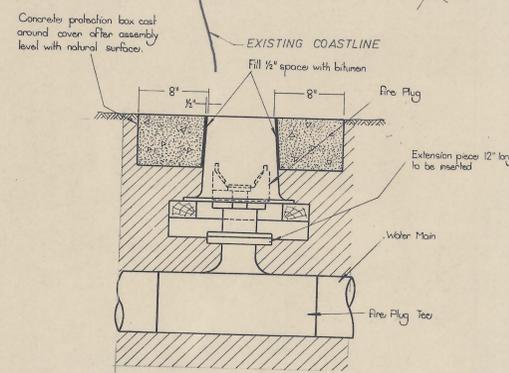

DETAIL OF URINAL

TYPE OF PLUGGING DEVICES	
TYPE	DESCRIPTION
1	1/2\"
2	1/2\"
3	1/2\"
4	1/2\"
5	1/2\"
6	1/2\"
7	1/2\"

- MANUFACTURER.**
- Material to be weldable grade 16 gauge satin finish austenitic stainless steel.
 - All metal joints to be welded using 18/18 electrodes and all external welding to be ground smooth and flush with the sheet metal.
 - Ends of urinal may be vented and are to be returned to edge of channel.
 - All channels shall have a 2\"
 - Channel to have a minimum depth of 2\"
 - Floor of urinal shall be filled with anti-drum material installed during manufacture.
- TILER.**
- Tiles along channel and outside edge of step to be laid raised.
 - All tiles to be set in a 3/4\"
 - Tiles to be graded 1/4\"

- INSTALLATION.**
- Channel to be thoroughly bedded on 3:1 cement mortar.
 - Urinal shall not be washed through any copper fitting or pipe.
 - Channels shall be with front press button or chain operated.
 - Height of head step shall be 4\"

GENERAL NOTES:
1. For all drainage details refer to city No. 2070-104

TENDER DRAWING ONLY
NOT FOR CONSTRUCTION USE

REV.	DATE	DESCRIPTION
KING ISLAND SCHEELITE LTD PORT AT LITTLE GRASSY BAY		
PORT AREA WATER SUPPLY AND SEWERAGE RETICULATION		
MAUNSELL & PARTNERS CONSULTING ENGINEERS		
SYDNEY	CANBERRA	MELBOURNE ADELAIDE PERTH
SCALE: 1/4\"		DRG. No. 2070/604
DATE: JAN. 1971		