

COMINEX PTY LTD
P.O.Box 77, Sorell
Tasmania 7172
SUMITOMO AUSTRALIA LTD
GPO Box 4241, Sydney
NSW 2001

**EL35/03 STEPHENS RIVULET-HAWKES CREEK
ANNUAL REPORT TO 9th March, 2005**

Volume 1 of 1

Prepared by N. J. Turner Geological Services Pty Ltd
65 Lochner St, West Hobart, Tasmania 7000

9th March, 2005

CONTENTS

	Page
1. Summary	2
2. Introduction	2
3. Previous work	2
4. Regional geology	2
5. Work carried out	3
6. Results	3
7. Conclusions	
7.1 Materials	3
7.2 Inferred resources	
7.2.1 Blackwater West	4
7.2.2 Hawkes Creek	5
8. Environmental matters	5
9. References	5

LIST OF FIGURES

- Figure 1 Tenement locality map.
- Figure 2 Blackwater West
- Figure 3 Hawkes Creek.

LIST OF APPENDICES

Appendix 1 Blackwater West auger drill logs.	6
Appendix 2 Blackwater West test pit logs.	11
Appendix 3 Hawkes Creek auger drill logs.	15
Appendix 4 Hawkes Creek test pit logs.	19

1 Summary

- A total of 34 auger drill holes were put down in EL35/03 during December, 2004, and a total of 17 test pits were dug.
- Nineteen of the auger holes were drilled at the Blackwater West prospect for the delineation of an inferred resource of 851,840 tonnes of probably commercial silica flour.
- Fifteen of the auger holes were drilled at the Hawkes Creek prospect for the delineation of an inferred resource of 179,100 tonnes of probably commercial silica flour.
- It is likely that further drilling, particularly at Blackwater West, would substantially increase the inferred resources.
- Geochemical results are not yet to hand.

2 Introduction

This is the first annual report for mineral exploration licence 35 of 2003, which is situated in the Arthur River district of north western Tasmania. The licence came into effect on 9.04.04 and will have a duration of five years. No reductions in size will be required during the five years. Another exploration licence is held by the Cominex Pty Ltd-Sumitomo Australia Ltd partnership in the Arthur River district. Its designation is EL61/94 and it is in its final year of tenure.

EL35/03 consists of two separate blocks of land (Figure 1). A block of 3km² is situated in State Forest on the south side of the Arthur River, near Stephens Rivulet, and is referred to as the Blackwater West prospect. Access is gained to the block via Forestry Tasmania's Blackwater Number 1 Spur Road. A 2km² block on the north side of the Arthur River, near Hawkes Creek, is also situated in State Forest and is referred to as the Hawkes Creek prospect. Access to this block is gained via Chatlee Road.

3 Previous work

Cominex Pty Ltd has had a long term interest in the silica flour potential of the Arthur River district, having worked in EL61/94 over a period of ten years. The application for EL35/03 came about as a result of a program of reconnaissance work in areas adjacent to EL61/94 (Turner, 2000).

4 Regional geology

Both of the blocks that make up EL35/03 are located within the area covered by the Geological Survey of Tasmania's Sumac 1:50,000 map sheet (Everard et al, 1999), which shows that each block is underlain by dolomite that is within the Late Proterozoic Togari Group. Each block also contains Tertiary deposits consisting of interbedded siliceous gravel, quartz sand and clay.

5 Work carried out

Auger drilling was carried out in both the Blackwater West and Hawkes Creek prospects. This work was facilitated by the existence of established road and track access within the two areas as a result of previous forestry activities. Some of the tracks were overgrown and were reopened in a minimalist way with a small (7 tonne) excavator.

Stacpoole Enterprises Pty Ltd of Launceston carried out the drilling with a track mounted CMV Geomeccanica Mk 600 rig supported by a flat tray, 4WD utility vehicle. Solid flight augers were used. This method of drilling enables a visual assessment of the quality of the silica flour that is recovered. However, it is an unsatisfactory sampling method for geochemical work due to steel contamination from the augers and to contamination by other materials in the drill holes.

Material for geochemical work was obtained from test pits, mostly dug adjacent to drill collars. The 7 tonne excavator was used for digging the test pits and sampling was carried out at maximum depths of 2-2.5m. A wooden implement was used to scrape away material contaminated by the steel bucket of the excavator and to dig out the sample from the wall of the test pit. Samples were collected in strong, plastic bags.

6 Results

Logs for the auger drilling and test pitting at Blackwater West are presented in Appendix 1 and Appendix 2 respectively. Logs for the Hawkes Creek work are given in Appendix 3 and Appendix 4. Geochemical results are not to hand.

7 Conclusions

7.1 MATERIALS

It is likely that very pale coloured, silica flour identified at Blackwater West and Hawkes Creek is of commercial quality though geochemical results are needed to confirm this. The promising colours include white, cream, off-white and very pale brown. Much of the material recovered by the augering was very pale brown whereas material from test pits adjacent to the auger holes was more consistently cream or white in colour. Grinding and mixing by the augers of fine, brown, plant rootlets that are widespread in the silica flour probably contributed to the very pale brown colouration. Also, a tiny proportion of pale brown clay is present in thin seams in some of the silica flour.

The product of the augering was almost entirely in the form of disaggregated quartz silt and quartz sand (silica flour) with varying proportions, usually minor, of coarse grit and larger particles. However, the test pits revealed that the natural, undisturbed state of much of the silica material is as a very weakly coherent

solid. This weakly coherent material or 'lump silica flour' is very soft, being readily crushed in the hand. Little hard, lump material was encountered at Blackwater West, but there are substantial amounts of hard, siliceous, banded material in parts of the Hawkes Creek prospect.

In comparison to the Corinna silica flour deposits, the deposits in EL35/03 are much drier and more uniform. Patches of dark brown, organic-rich, silica flour may occur erratically through the commercial flour at Corinna whereas in EL35/03 the dark brown flour appears to be confined to the bottom of the sections that were drilled. Water is encountered in most shallow drill holes at Corinna whereas most of the holes in EL35/03 were dry, at least in the potentially commercial parts of the sections drilled. Tertiary gravel caps most of the silica flour at Corinna, but in the areas drilled in EL35/03 there is no (?remaining) Tertiary gravel.

7.2 INFERRED RESOURCES

7.2.1 Blackwater West

Four types of ground have been distinguished at Blackwater West (Figure 2). Nine drill holes have been used to delineate an area of deep resource in which pale coloured, silica flour has an average thickness of 12.6m. Seven drill holes have been used to delineate a contiguous area of shallow resource in which pale coloured, silica flour has an average thickness of 5m. Silica flour also underlies the surrounding area. Drilling has shown the flour to be thin in two parts of this surrounding area, but elsewhere the depth is untested. Further drilling of the untested ground, particularly around the southern end of the main ridge, would be likely to substantially increase the areas of deep and shallow resource.

The inferred resources for the currently delineated areas are as follows:

1.	Area of deep resource	24,200m ²
	Average thickness	12.6m
	Volume of resource	304,920m ³
	Density of silica flour	2 tonnes/m ³
	Mass of resource	609,840 tonnes
2.	Area of shallow resource	24,200m ²
	Average thickness	5m
	Volume of resource	121,000m ³
	Mass of resource	242,000 tonnes
	Total inferred resource	851,840 tonnes

7.2.2 Hawkes Creek

Fourteen drill holes have been used to delineate an area of shallow resource of pale coloured, silica flour at the Hawkes Creek prospect (Figure 3). It is assumed that the silica flour thins to 0m at the north western end of the deposit and, thus, the average thickness is 4.5m. The delineated area corresponds to the relatively flat top of a ridge. Access to the sides of the ridge is only readily available along Chatlee Road. The drilling results along this road traverse suggest that further drilling along the median line of the ridge crest, and on the slopes of the ridge might increase the following inferred resource.

Area of resource	19,900m ²
Average thickness	4.5m
Volume of resource	89,550m ³
Mass of inferred resource	179,100 tonnes

As the Blackwater West resource appears to contain little waste in the form of hard lump or erratic patches of dark coloured flour, the inferred resource figure does not appear to require a cut. However, the abundance of hard lump in parts of the Hawkes Creek prospect indicates that a cut to the above resource estimate may be required. Further drilling and pitting will be necessary to finalise the resource estimate for Hawkes Creek.

8 Environmental matters

The reopened tracks at Blackwater West remain open, but numerous grips and mounds have been constructed in order to minimise erosion. A trench was dug at the entrance to the main track in order to discourage casual use. At Hawkes Creek a number of very short (10-20m) side tracks were rehabilitated. As the drilling rig did not require special preparation of drill pads, there were no drill sites to rehabilitate. All test pits were rehabilitated immediately upon completion of logging and sampling.

9 References

Everard J. L., Seymour D. B., Green D. C., McClenaghan M. P., Brown A. V. 1999. Digital Geological Atlas 1:25,000 Series. Sumac. Tasmanian Geological Survey.

Turner N. J. 2000. EL61/94 Arthur River. Interim report to 31st May 2000. Cominex Pty Ltd.


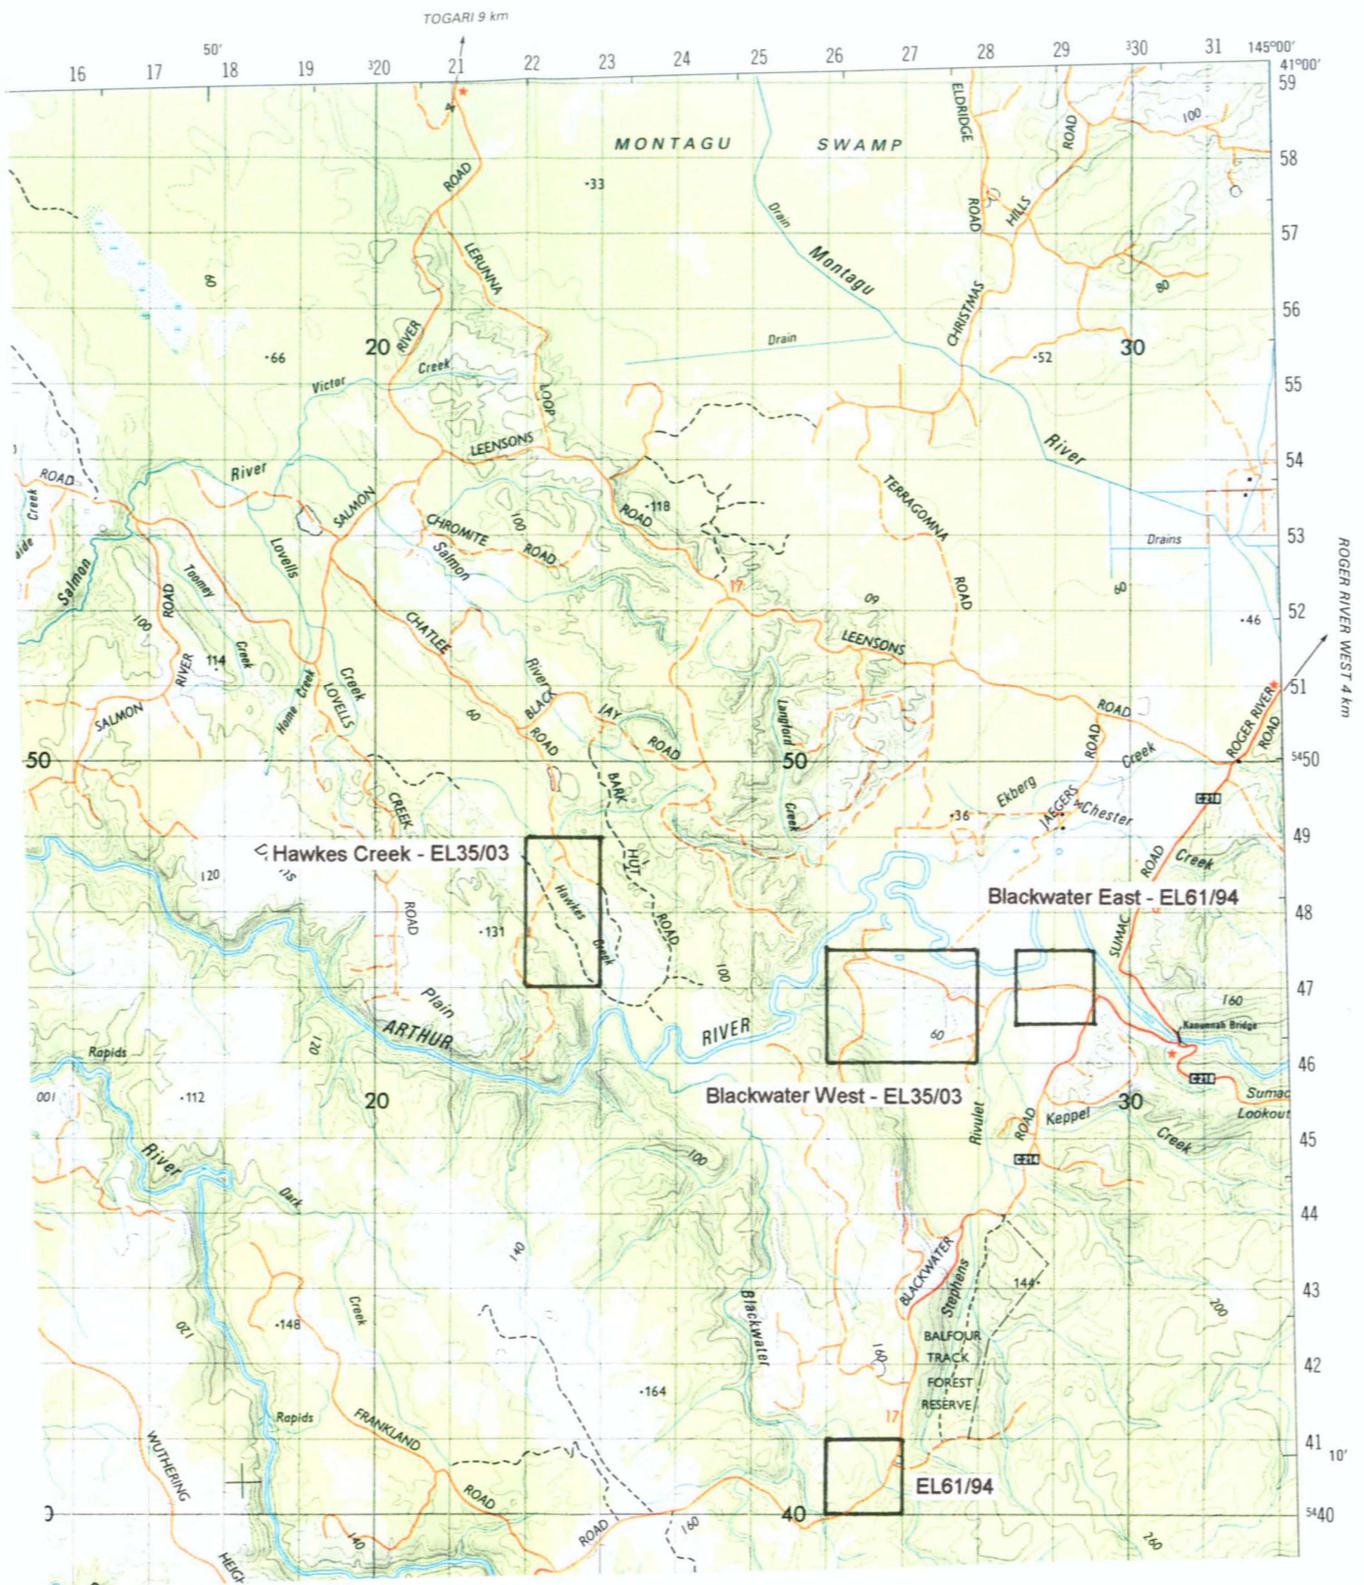


Figure 1: Locality map of Cominex Pty Ltd's exploration licences in the Arthur River district, north west Tasmania. The base map is portion of the Nelson Bay 1:100,000 Sheet, Land Information Services, Tasmania.

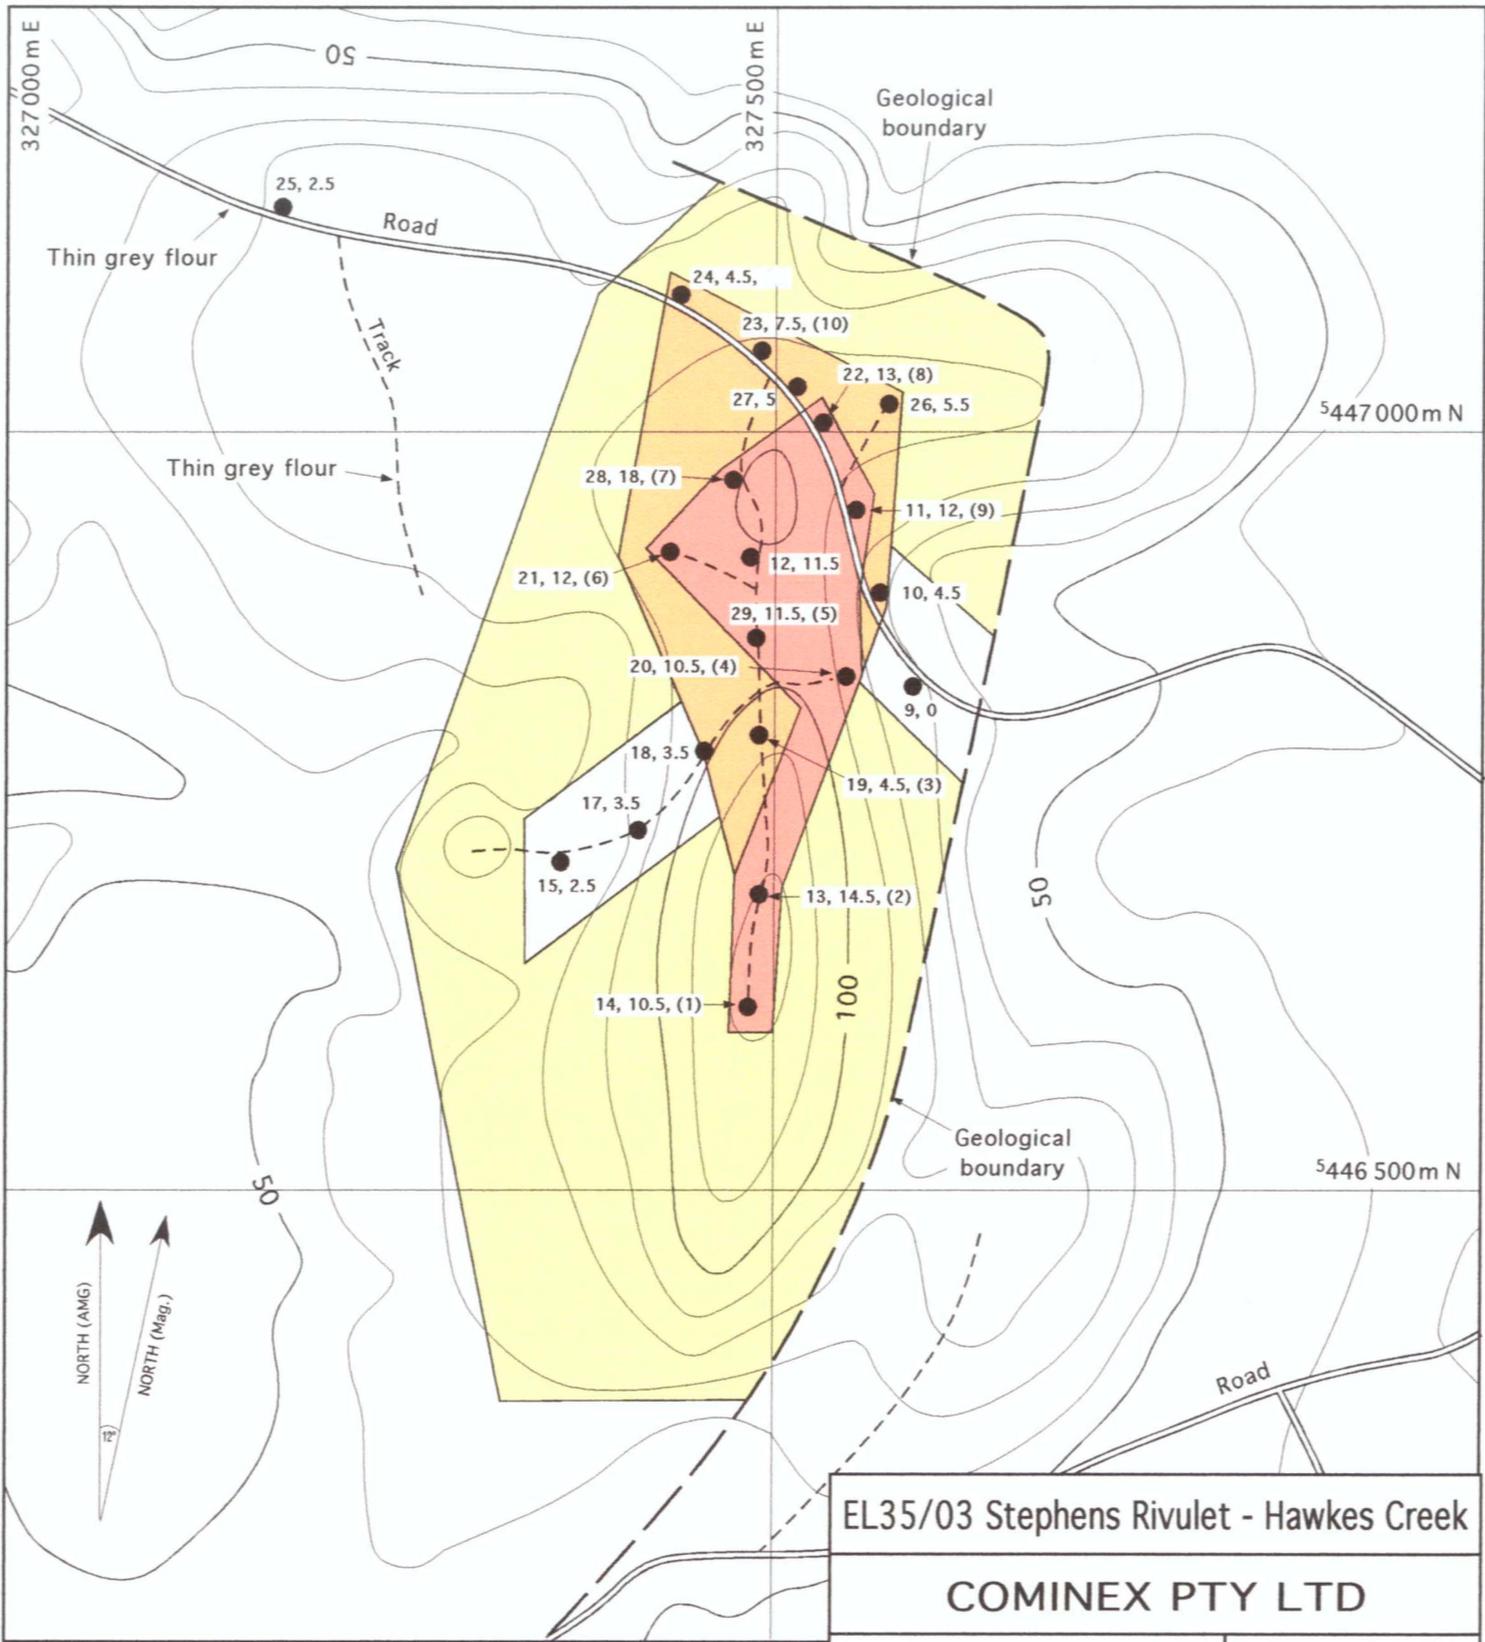

EL35/03 Stephens Rivulet - Hawkes Creek

COMINEX PTY LTD

Blackwater West Prospect

5.1.2005

Location of auger holes
& test pits with
thickness of potentially
commercial silica flour.

Compiled by
Nic Turner

Drawn by
Ray Carroll

Scale 1: 5000 (at A4)

N J Turner Geological
Services Pty Ltd

Figure 2


● 14, 10.5, (1) Auger hole location with number of hole, thickness of potentially commercial silica flour, and number (in brackets) of adjacent test pit where present.

Deep resource (average thickness 12.6m)

Shallow resource (average thickness 5m)

Untested potential resource

0 100 200 300 400m

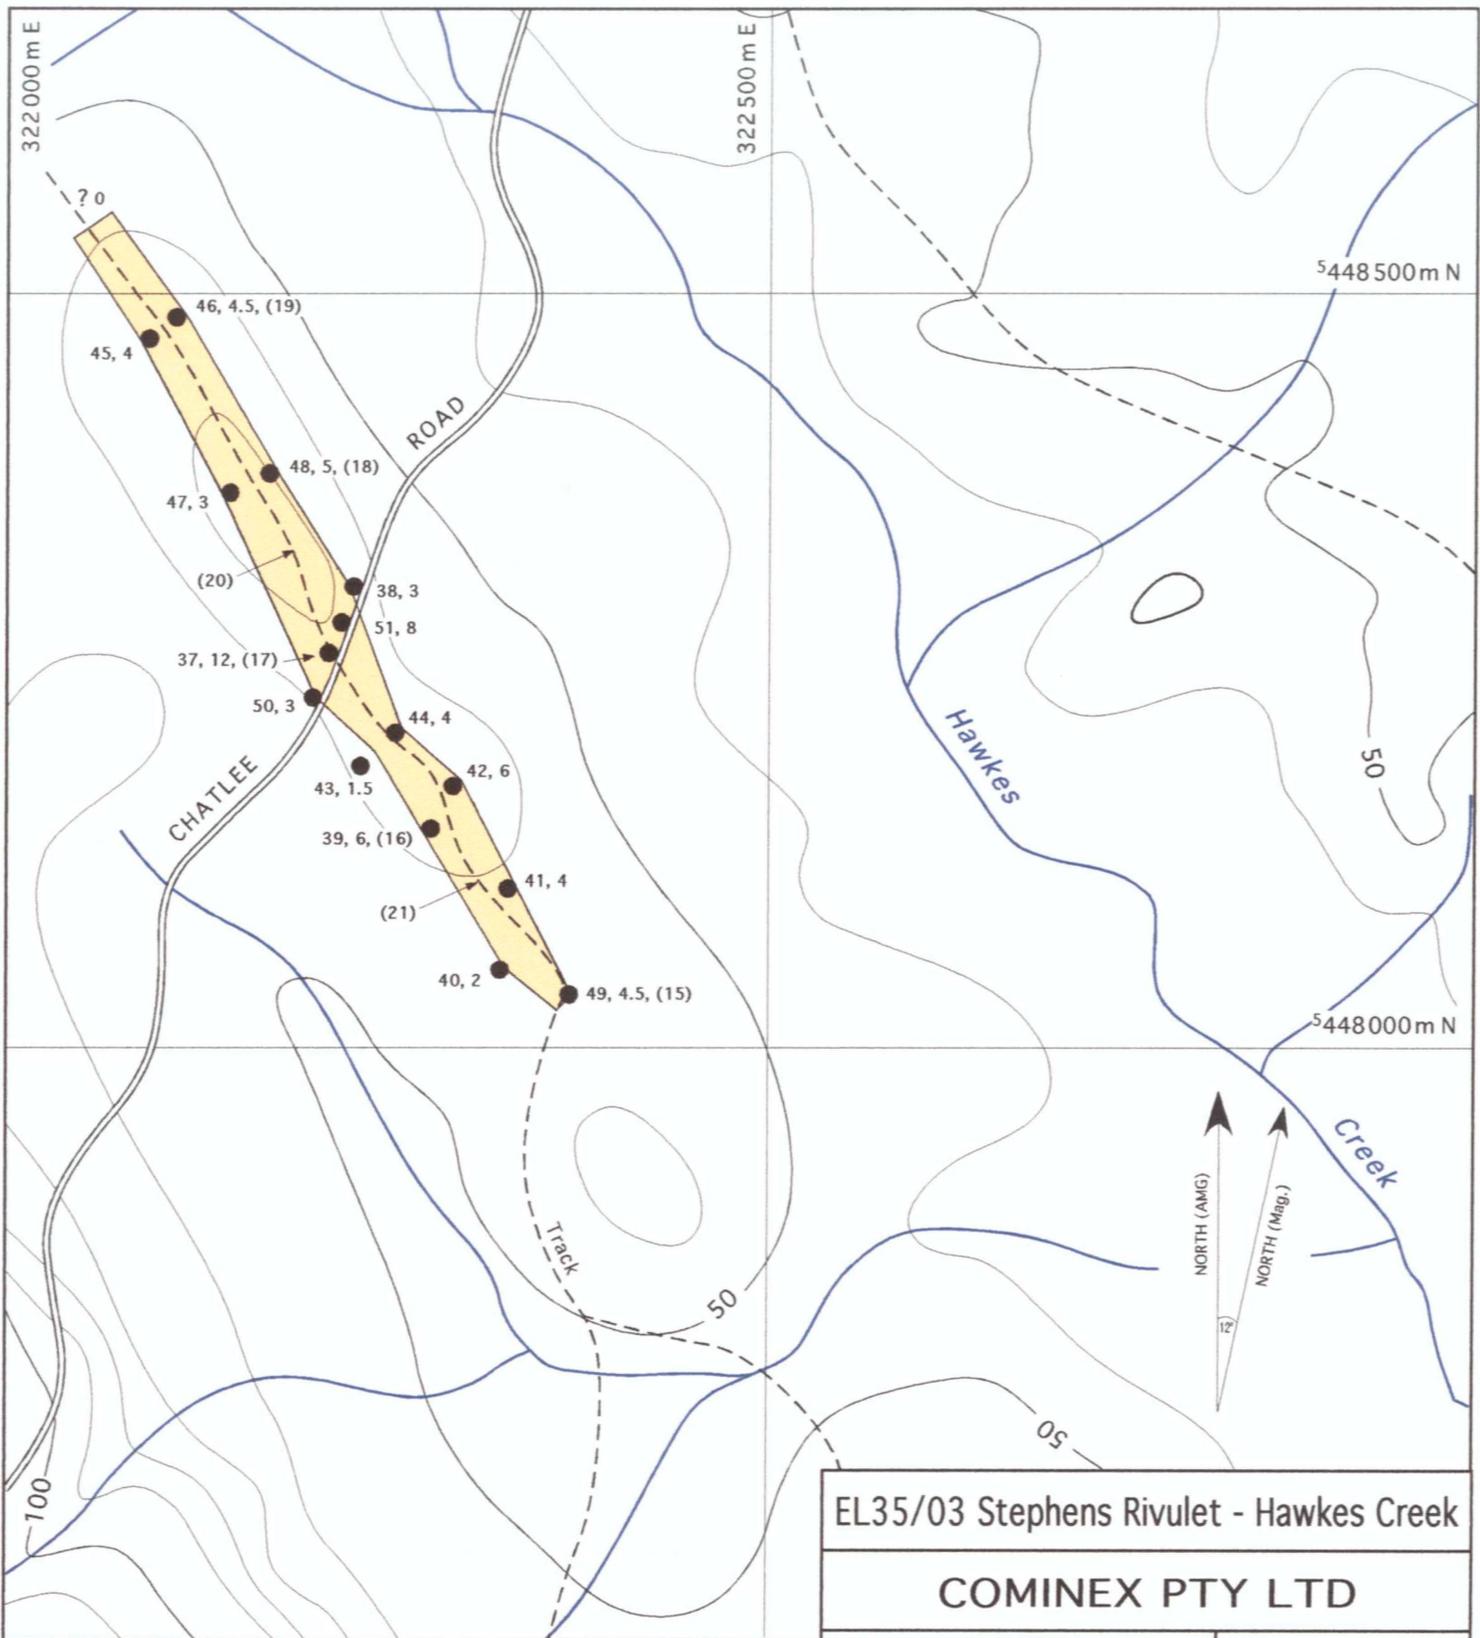

EL35/03 Stephens Rivulet - Hawkes Creek

COMINEX PTY LTD

Hawkes Creek Prospect
 Location of auger holes
 & test pits with
 thickness of potentially
 commercial silica flour.

5.1.2005

Compiled by
 Nic Turner

Drawn by
 Ray Carroll

Scale 1: 5000 (at A4)

N J Turner Geological
 Services Pty Ltd

Figure 3

● 39, 6, (16) Auger hole location with number of hole, thickness of potentially commercial silica flour, and number (in brackets) of adjacent test pit where present.

Note: Test pit 20 is not adjacent to an auger hole. Test pit 21 is a track cutting.

Shallow resource (average thickness 4.5m)

0 100 200 300 400m

COMINEX PTY LTD

8th March, 2005

EL35/03 Stephens Rivulet-Hawkes Creek. Annual Report to 9/4/05

Appendix 1: Blackwater West auger drill logs, 2004.

The collars of holes in Blackwater West were surveyed by compass and tape and their AMG coordinates were determined with a hand held GPS (Magellan 315). Where necessary, the values of thickness of potentially commercial silica flour shown in Figure 2 have been reduced by around 0.5m relative to the values shown in the following log. This adjustment is to allow for the stripping of the soil horizon.

Hole Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
AAH9 /04	327577	5446838	0-3.4 3.4	Due to removal of material during road construction the hole commenced at an approximate depth of 1.5m below the natural surface. The adjacent road cutting consists of mottled white and medium brown, silica flour with common lump. Medium and dark brown, silica flour. Refusal on rock. Hole abandoned.
AAH10 /04	327551	5446884	0-4.5 4.5-7.5 7.5	Soil removed during road building, prior to drilling. Very pale brown, silica flour. Minor grit. Dry. Grades medium to dark brown, silica flour. Wet below 6m. Hole abandoned.
AAH11 /04	327550	5446945	0-12 12-15 15	Soil removed during road building, prior to drilling. Mottled cream and very pale brown, silica flour. Little grit. Dry. Uniformly medium brown flour. Damp by 15m. Hole abandoned.
AAH12 /04	327494	5446913	0-11.8 11.8-17.7 17.7	About 0.3m of mostly humus removed before drilling, during track making. Cream, silica flour becoming very pale greyish-brown below 6m. Minor grit. Dry. Medium and pale brown, silica flour. Drilling tight. Abandoned hole.
AAH13 /04	327496	5446685	0-15 15-16 16	About 0.3m of mostly humus removed before drilling, during track making. Very pale brown, silica flour with minor grit. Dry. Colour becomes a little more intense though still pale brown. Dry. Too tight. Hole abandoned.
AAH14 /04	327487	5446625	0-11	About 0.3m of mostly humus removed before drilling, during track making. Mottled very pale brown and white, silica flour. Low grit. Dry. Colour becomes a little stronger below 3m.

Hole Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
			11-12	Orange-brown flour with minor white patches.
			12	Hole abandoned. Note: A hole was refused at 8m.
AAH15 /04	327362	5446710	0-1.5	About 0.3m of mostly humus removed before drilling, during track making. Mottled pale brown and very pale brown, silica flour. Little grit. Dry.
			1.5-3	Quickly grades to medium and dark brown, lumpy, silica flour.
			3	Hole abandoned.
AAH16 /04	327370	5446713		Similar AAH15/04.
AAH17 /04	327416	5446729	0-3	About 0.3m of mostly humus and 0.7m of white, silica flour were removed before drilling, during track making. Mottled white and very pale brown, silica flour. Dry.
			3-9	Passed into medium brown, silica flour that forms coating over white flour at 6m, but grades to dark brown at 9m.
			9	Abandoned hole.
AAH18 /04	327458	5446783	0-3.5	About 0.3m of mostly humus removed before drilling, during track making. Very pale brown, silica flour. Little grit. Dry.
			3.5-4.5	Orange, clayey flour.
			4.5	Hole abandoned.
AAH19 /04	327491	5446799	0-5	About 0.3m of mostly humus removed before drilling, during track making. Very pale grey, silica flour. Dry. Little grit.
			5-9	Orange, silica flour with sparse patches of white.
			9	Hole abandoned.
AAH20 /04	327539	5446828	0-11	Very pale brown, silica flour with moderate grit and moderate lump. Dry.
			11-12	Dark brown, silica flour.
			12	Hole abandoned.
AAH21 /04			0-12	About 0.3m of mostly humus removed before drilling, during track making. Very pale brown flour with minor lump. Dry.

Hole Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
			12-15 15-18 18	Stronger colour though still pale brown. Dark brown, silica flour. Hole abandoned.
AAH22 /04	327522	5446998	0-1 1-12 12-15 15	About 0.3m of mainly humus and 1.5m of very pale brown, lumpy, silica flour were removed during road making, prior to drilling. Orange flour. Very pale brown, dry, silica flour. Common grit and lump silica flour, which reduces with depth. Medium and dark brown flour. Hole abandoned.
AAH23 /04	327478	5447044	0-7 7-9	About 0.3m of mainly humus and 0.7m of probably-pale, silica flour were removed during road making, prior to drilling. Very pale brown, dry, silica flour. White near 6m. Little grit. Medium to dark brown, silica flour.
AAH24 /04	327430	5447080	0-5 5-6 6	Soil removed during roadbuilding, prior to drilling. Very pale brown, dry, coarse grained, silica flour. Abundant lump. Medium and dark brown flour. Abandoned hole.
AAH25 /04	327165	5447139	0-2.5 2.5-3 3	Soil removed during roadbuilding, prior to drilling. Very pale brown, dry, coarse grained, silica flour. Common grit and lump. Bright orange, coarse grained, dry flour. Hole abandoned.
AAH26 /04	327576	5447018	0-6 6+	About 0.3m of mostly humus removed before drilling, during track making. Very pale brown, silica flour becoming white below 3m. Dry. Abundant lump. No record. Probably refused.
AAH27 /04				About 0.3m of mainly humus and 0.7m of probably-pale, silica flour were removed during road making, prior to drilling.

Hole Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
			0-4.5	Very pale brown, dry, silica flour with minor grit.
			4.5-6	Orange-brown flour with limonite and possibly minor clay.
			6	Hole abandoned.
AAH28 /04	327461	5446862		About 0.3m of mostly humus removed before drilling, during track making.
			0-18	Very pale brown, dry, silica flour. Slight darkening of colour below 12m, but still very pale brown. Remarkably uniform.
			18	Too tight to lift loaded augers. Hole abandoned.
AAH29 /04	327488	5446864		About 0.3m of mostly humus removed before drilling, during track making.
			0-11.8	Very pale brown, silica flour with minor grit. Dry.
			11.8-18	Very pale and medium brown to 15, then dark brown flour becoming mottled with white flour near 18m.
			18	Too tight. Hole abandoned.

COMINEX PTY LTD

8th March, 2005

EL35/03 Stephens Rivulet-Hawkes Creek. Annual Report to 9/4/05

Appendix 2: Blackwater West test pit logs, 2004.

The test pits were dug with a 7 tonne excavator.

Test Pit Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
ATP1 /04	327487	5446625		Adjacent to AAH14/04. Around 0.3m of soil removed during track building, prior to excavation. 0-0.5 Grey, organic-rich soil with abundant tree roots. 0.5-2.4 Off-white, dry, silica flour containing about 50% by volume of weakly coherent, lump silica flour. Fine, fibrous, brown plant roots are widespread in the flour throughout the pit. These may contribute to the very pale brown colour of the flour in the auger samples. Samples: 2Xflour from 2.2m; 1Xlump from 1.4m.
ATP2 /04	327496	5446685		Adjacent to AAH13/04. Around 0.3m of soil removed during track building, prior to excavation. 0-0.5 Leaf litter over grey, organic-rich, sandy soil. 0.5-2.25 Cream, dry, silica flour with very minor lump material. Plant roots throughout. Samples: 2Xflour from 2.2m.
ATP3 /04	327491	5446799		Adjacent to AAH19/04. Around 0.3m of soil removed during track building, prior to excavation. 0-0.5 Leaf litter over grey, organic-rich, sandy soil. 0.5-2.5 Off-white, dry, silica flour. Virtually no grit and no lump. Fine plant roots widespread. Samples: 2Xflour from 2.5m.
ATP4 /04	327539	5446828		Adjacent to AAH20/04 0-0.5 Leaf litter over grey, organic-rich, sandy soil.

Test Pit Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
			0.5-2.6	Off-white, dry, silica flour containing about 30% of lump silica flour. Fine plant roots throughout. Samples: 2Xflour from 2.6m; 1Xlump from 2.5m.
ATP5 /04	327488	5446864		Adjacent AAH29/04
			0-0.5	Leaf litter over grey, organic-rich, sandy soil.
			0.5-2.2	Material is weakly coherent throughout, but is easily crushed to flour in the hand. Minor hard, lump silica also present. Dry. Fine tree rootlets scattered throughout. Samples: 2Xflour from 2.2m.
ATP6 /04	327389	5446850		Adjacent to AAH21/04
				About 0.3m of leaf litter and grey, organic-rich, sandy soil removed before excavation.
			0-2.2	Cream, dry, silica flour with minor grit. Weakly coherent. No hard lump. Fine rootlets scattered throughout. Samples: 2Xflour from 2.2m.
ATP7 /04	327461	5446862		Adjacent to AAH28/04
				About 0.3m of leaf litter and grey, organic-rich, sandy soil removed before excavation.
			0-2.7	Cream, dry, silica flour with weakly coherent patches. The latter contain minor, very thin seams or relict veins in which coarsely granular quartz is coated with pale brown clay. Samples: 2Xflour and 1Xlump from 2.7m.
ATP8 /04	327522	5446998		Adjacent to AAH22/04
				About 0.3m of mainly humus and 1.5m of very pale brown, lumpy, silica flour were removed during road making, prior to excavation.

Test Pit Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
			0-2.7	Cream, dry, silica flour with minor grit. Contains small patches of weakly coherent lump. The lump silica flour patches contain minor thin seams or relict veins of coarsely granular quartz that is thinly coated with pale brown clay. Samples: 2Xflour and 1Xlump from 2.7m.
ATP9 /04	327550	5446945		Adjacent AAH11/04. About 0.3m of leaf litter and grey, organic-rich, sandy soil removed before excavation.
			0-2.6	Cream, dry, silica flour that contains about 30% of patches of weakly coherent lump. Grey, granular quartz and clay-coated, granular quartz occurs in minor, thin seams or relict veins in the lump. Samples: 2Xflour from 2.5m; 1X lump from about 2m.
ATP10 /04	327478	5447044		Adjacent to AAH23/04. About 0.3m of mainly humus and 0.7m of probably-pale, silica flour were removed during road making, prior to excavation.
			0-2.6	Cream, dry, silica flour with little grit or lump. Trace present of seams/relict veins. Samples: 2Xflour from 2.6m.

COMINEX PTY LTD

8th March, 2005

EL35/03 Stephens Rivulet-Hawkes Creek. Annual Report to 9/4/05

Appendix 3: Hawkes Creek auger drill logs, 2004.

The collars of holes in Hawkes Creek were surveyed by compass and tape. This survey was matched to the available topographic data (Figure 3) by means of AMG coordinates determined with a hand held GPS (Magellan 315).

Hole Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
AAH37 /04			0-12 12	About 0.3m of humus and soil removed by road making prior to drilling. Very pale grey, silica flour with common grit. Dry, but becoming damp near 12m. Too tight to lift loaded augers. Hole abandoned.
AAH38 /04			0-1.5 1.3-3 3	About 0.3m of soil and 1.5m of probably-white, silica flour removed by road making prior to drilling. Cream, dry, silica flour with minor grit. Wet, orange-brown flour. Hole abandoned.
AAH39 /04	322289	5448158	0-6 6-9 9	At least 0.3m of humus and soil removed by road making prior to drilling. Very pale brown, dry, silica flour with common grit, minor lump. Dark brown, damp, silica flour. Hole abandoned
AAH40 /04			0-1 1-3 3-6 6	Brown, silica flour. Very pale grey, silica flour at 1.5m, becoming damp at 3m where brown flour formed a coating over white, silica flour. Dark brown flour. Hole abandoned.
AAH41 /04			0-4 4-6 6	About 0.3m of soil removed prior to drilling. Cream, silica flour with common grit. Dry. Dark brown flour. Hole abandoned.
AAH42 /04			0-6 6-9 9	Dry, very pale brown, silica flour with common grit. Colour strengthens below 3m, but remains pale. Dark brown, silica flour. Hole abandoned.
AAH43 /04			0-1.5 1.5-3 3	Pale greyish-brown, silica flour. Little grit. Wet, dark brown, silica flour. Hole abandoned.

Hole Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
AAH44 /04	322255	5448205		At least 0.3m of humus and soil removed by road making prior to drilling.
			0-4	Very pale brown, dry, silica flour. Becomes whiter below 1.5m.
			4-6	Wet, dark brown flour.
			6	Hole abandoned.
AAH45 /04				At least 0.3m of humus and soil removed by track making prior to drilling.
			0-4.5	Very pale brown, dry, silica flour with moderate grit.
			4.5	Refusal on rock. End of hole.
AAH46 /04				About 0.3m of humus and soil removed by road making prior to drilling.
			0-4.5	Very pale brown, dry, silica flour with little grit.
			4.5-6	Wet, dark brown, silica flour.
			6	Hole abandoned.
AAH47 /04				At least 0.3m of humus and soil removed by track making prior to drilling.
			0-3	Very pale brown, dry, silica flour. Minor grit.
			3-4	Pale to medium brown flour. Dry.
			4	Refusal on rock. End of hole.
AAH48 /04	322147	5448364		About 0.3m of humus and soil removed by track making prior to drilling.
			0-5	Very pale and pale brown, dry, silica flour.
			5-7	Grades from medium brown to wet, dark brown.
			7	Hole abandoned.
AAH49 /04	322374	5448021		At least 0.3m of humus and soil removed by road making prior to drilling.
			0-4.5	Very pale brown, dry, silica flour.
			4.5-7.5	Wet. Grades from pale brown to dark brown flour.
			7.5	Hole abandoned

Hole Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
AAH50 /04				At least 0.3m of humus and soil removed by road making prior to drilling.
			0-3	Unusual material comprising coarse grained, quartz sand. Very pale brown. Damp.
			3	Passes into brown and orange clay. End of hole.
AAH51 /04				About 0.3m of soil and 1.2m of probably-whitish, silica flour removed by road making prior to drilling.
			0-7	Cream, dry, silica flour with moderate grit.
			7-9	Dark brown flour.
			9	Hole abandoned.

COMINEX PTY LTD

8th March, 2005

EL35/03 Stephens Rivulet-Hawkes Creek. Annual Report to 9/4/05

Appendix 4: Hawkes Creek test pit logs, 2004.

The test pits were dug with a 7 tonne excavator.

Test Pit Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
ATP15 /04	322374	5448021	0-2 (approx.)	Adjacent to AAH49/04 At least 0.3m of humus and soil removed by road making prior to excavation. Cream, dry, silica flour. Very firm i.e. hard to dig with bucket. Samples: 2Xflour from 2m (approx.)
ATP16 /04	322289	5448158	0-2.2	Adjacent to AAH39/04. About 0.4m of humus and soil removed by road making prior to excavation. Mottled cream and pale grey, dry, silica flour. Firm and hard to dig with bucket. Contains isolated blocks up to 0.3m across of massive and banded, very hard, siliceous material. Samples: 2Xflour from 2.2.
ATP17 /04			0-2.2	Adjacent to AAH37/04. About 0.3m of humus and soil removed by road making prior to excavation. Cream, dry, silica flour with grit and lump. Contains isolated blocks up to 0.2m across of siliceous material that ranges hard to friable. Samples: 2Xflour from 2.2m.
ATP18 /04	322147	5448364	0-2 (approx.)	Adjacent to AAH48/04. About 0.3m of humus and soil removed by track making prior to excavation. Cream, dry, silica flour with common grit. Flour firm and hard to dig with bucket. Hard, siliceous granules present as well as about 15% by volume of hard, blocky silica. Samples: 2Xflour from 2m (approx.).
ATP19 /04				Near to AAH46/04. About 0.3m of humus and soil removed by road making prior to excavation.

Test Pit Number	AMG Easting (m)	AMG Northing (m)	Interval (m)	Comment
			0-2.4	Cream, dry, gritty, silica flour. About 5% of hard, siliceous lumps. Scattered tree roots extend to below 2m. Relatively easy digging cf. ATP18/04 Samples: 2Xflour from 2.4m.
ATP20 /04			0-1.1	About 0.3m of soil removed by road building prior to excavation. Very pale brown, dry, gritty, silica flour with medium brown mottling. Test pit is in predominantly (about 70%) hard, lump silica. Too hard to dig with small excavator. Samples: 2Xflour from 1m.
ATP21 /04			0-0.4 0.4-1.8	A track cutting was utilised as ATP21 Humus over thin, grey, sandy soil. Weakly coherent, gritty, white, silica flour. Hard to gig with pick. Samples: 2Xflour from 1.8 (approx.)