



Tim Callaghan – Resource and Exploration Geology

3 Main Rd Penguin 7318 ph. 0428 888 896 email: timcallaghan@netspace.net.au
ABN 50886857181

EL19/2001
ANNUAL REPORT, 2011
KING ISLAND
NW TASMANIA

Prepared for: Scheelite Management Pty Ltd.

Tim Callaghan, December 2011

EXECUTIVE SUMMARY

EL19/2001 is an integral component of the tenement package required for the development of the King Island Scheelite Project. The EL covers 7kms of prospective ground around the Grassy Granite and hosts a number of significant deposits and exploration targets including the Bold Head Mine, Investigator 21 and Grassy West.

During 2011, King Island Scheelite (KIS) have focused on a revised Definitive Feasibility Study into the reopening of the Dolphin and Bold Head underground mines and the reprocessing of the historic tailings. Numerous concurrent technical studies are in progress or have been completed during the past year including resource and reserve estimation, metallurgical testwork, environmental management plans and permitting, mining plans, process design, construction, cost estimates and financial modeling.

Two drilling programs have been completed during 2011 including resource definition drilling of the historic tailings dam and resource extension exploration at South Dolphin.

Limited direct exploration work was completed on EL19/2001 during 2011. The exploration program for 2012 and is likely to involve historic data collation and target generation. Exploration drilling of the tenement package is likely to resume in 2013 once mining operations have commenced.

The project work program for 2012 is scheduled to include mine dewatering and re-commissioning, mill engineering, procurement and construction and tailings reclamation and infrastructure development. A detailed mine plan for Bold Head is being finalized and a Mine Lease Application will be submitted to convert that part of EL19/2001 to an ML during 2012.

CONTENTS

Executive Summary	2
1 Introduction	4
2 Geology	6
3 Exploration Prospects EL19/2001	10
3 Work Completed	12
4 Proposed Work 2012	13
Additional Notes	14
References	15

LIST OF FIGURES

Figure 1	King Island Project Geology, Tenements and Major Prospects	6
Figure 2	Regional Geology Northwest Tasmania	8
Figure 3	Stratigraphic column of the Grassy Group	11

1 INTRODUCTION

The King Island Scheelite Project is located in the southeastern corner of King Island, Tasmania (Figure 1). Project tenure includes a Mine Lease (1M/2006), a Retention License (RL2/1998) and two Exploration Licenses (EL19/2001 and EL16/2002). The full tenement package is integral to development of the King Island Scheelite Project.

The Dolphin Mine located on 1M/2006 was originally operated by Geopeko Ltd. along with the satellite Bold Head Mine located several kilometers to the north on EL19/2001.

The Dolphin and Bold Head Scheelite Mines operated intermittently since their discovery and start up in 1920 until the 1990's, with several forced shutdowns due to low tungsten prices. The site was decommissioned and rehabilitated in 1990.

King Island Scheelite (KIS) have been investigating the potential of re-opening the mines. Initial investigations into the viability of an open cut and seawall were inconclusive and the focus has changed to rehabilitation of the underground workings and production from remnant resources. KIS are completing a definitive feasibility study into a 350ktpa mine and processing facility producing 5700t of concentrate per annum over an 11 year mine life. Mine rehabilitation and mill construction are scheduled to commence in 2012.

Resource and reserve estimation of the Dolphin and Bold Head Deposits and historic tailings storage facility (TSF) have been completed over the last 2 years and form the basis of the King Island Scheelite Project (Table 1 and 2).

TABLE 1. KING ISLAND SCHEELITE PROJECT RESOURCES			
	Tonnes	WO₃	Tonnes WO₃
Dolphin	0.70% WO ₃ cutoff		
Indicated	4,752,000	1.29	61,300
Inferred	7,000	0.73	50
Total	4,759,000	1.29	61,350
Bold Head	0.50% WO ₃ cut off		
Indicated	1,500,000	0.93	13,950
Inferred	150,000	1.22	1,830
Total	1,650,000	0.96	15,780
TSF	0.08% WO ₃ cut off		
Measured	2,700,000	0.17	4,590
Total	9,109,000	0.90	81,720

TABLE 2. KING ISLAND SCHEELITE PROJECT RESERVES			
	Tonnes	WO₃	Tonnes WO₃
Dolphin Probable	2,687,000	1.04	28,060
Bold Head Probable	609,000	0.76	4,640
Tailings Proven	1,900,000	0.19	3610
Total	5,196,000	0.70	36,310

Technical studies associated with the Definitive Feasibility Study that have been completed or are in an advanced stage include:

- Resource Estimation
- Mining Studies
- Reserve Estimation
- Metallurgical Testwork
- Process Flow Sheet design
- Environmental Management Plan
- Market Off take agreements
- Financial Modelling
- Negotiations with Funding Facilities
- Resource Extension Drilling

Most of the work over the past year has focused on the Mine Lease 1M/2006 technical studies assisting development of the Definitive Feasibility Study. Consequently limited work on either EL 19/2001 or EL 16/2002 has been completed. EL19/2001 is integral to the development of the King Island Scheelite Project and is expected to add longevity to the project through exploration once operations commence.

It is anticipated that exploration will focus on resource extension and regional exploration once project funding is completed and construction has commenced in late 2012.

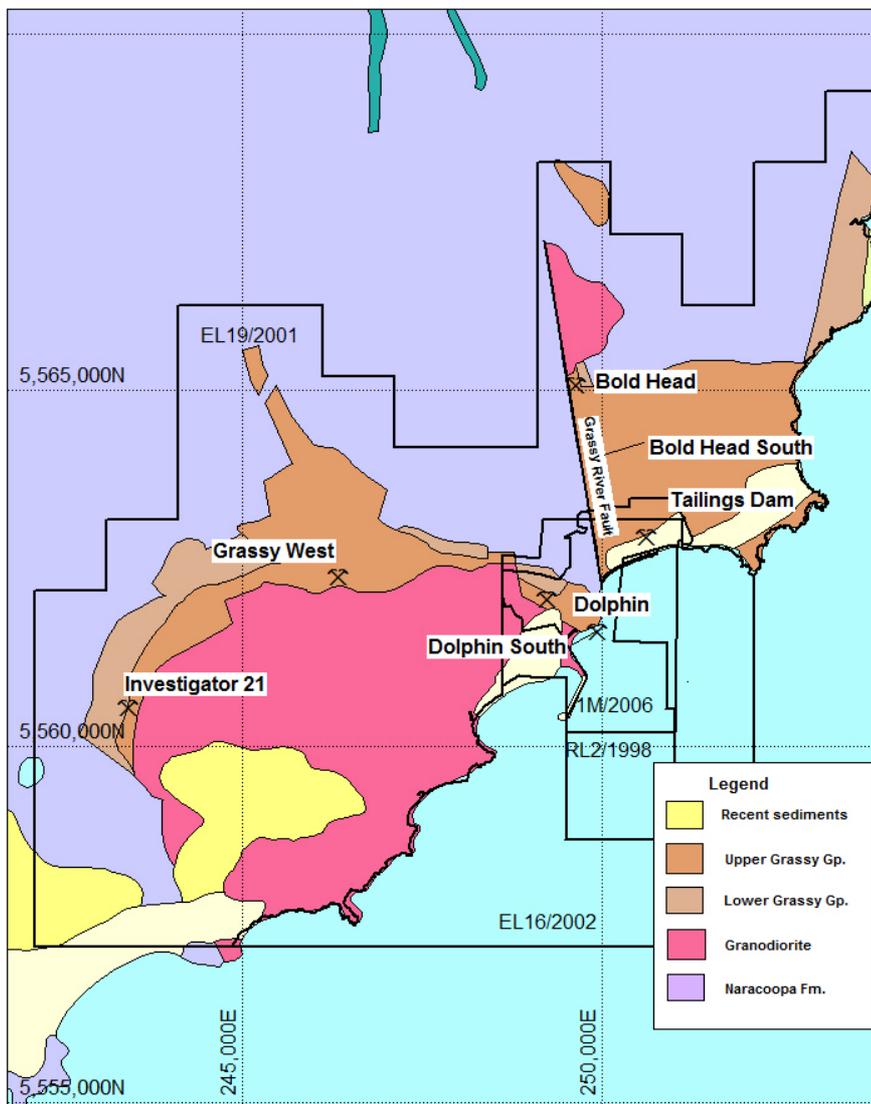


Figure 1. King Island Project Geology, Tenements and Major Prospects.

2 GEOLOGY

The regional geology of King Island is best described in Tasmanian Geological Record 2007/02, *Some Notes on the Geology of King Island* (Calver, 2007). Much of the geology described in this section is summarized from this publication (Figure 2).

The geology of King Island consists primarily of Proterozoic rocks with lesser Devonian Granites and extensive wind blown Pleistocene to Recent sand cover. The Proterozoic Geology of the eastern half of the island (hosting the Bold Head and Dolphin WO₃ deposits) is distinctly different from the geology of the western half. The relationship between the western and eastern halves remains problematic.

The western half is dominated by the Mesoproterozoic (1300Ma) Surprise Bay Formation. The Surprise Bay Formation is dominantly a N-S striking regionally metamorphosed amphibolite grade meta-sedimentary unit with minor mafic intrusives. The western margin of the Surprise Bay Group was intruded by a 790Ma granite body (Calver, 2007) post dating the 760Ma Wickham Orogeny (Cox, 1989, Turner *et. al.* 1998).

The Eastern half of the Island is dominated by the (1000-750Ma) Naracoopa Formation which appears to be a correlate of the Cowrie Siltstone in NW Tasmania (Calver, 2007). The Naracoopa Formation consists of a thick succession of relatively unmetamorphosed shale, siltstone and fine grained muscovite-quartz sandstone. Along the Southeast Coast the siltstone is conformably overlain by the 580Ma Grassy Group which is considered a correlate of the Togari Group in NW Tasmania, (Calver, 2007).

The Grassy Group in the City of Melbourne Bay area is well described by Calver (2007) and Meffre *et al* (2004). A summary of the Grassy group stratigraphic sequence is described below:

Cottons Breccia - A basal unit of polymict cobble to boulder diamictite.

Cumberland Creek Dolostone - Calcareous sediments, shale with limestone/dolomite inter-beds. (Host Horizon for the King Island Scheelite Mineralisation).

Yarra Creek Shale - Planar laminated shale with rare volcanoclastic interbeds.

Grimes Intrusive Suite - Gabbroic intrusive sills of andesitic composition.

City of Melbourne Volcanics - Tholeiitic pillow lava, peperite and volcanoclastic sandstone.

Shower Drop Volcanics – Picritic, high MgO pillow lava and hyaloclastite.

Bold Head Volcanics – Tholeiitic basalt, volcanoclastic sandstone and conglomerate.

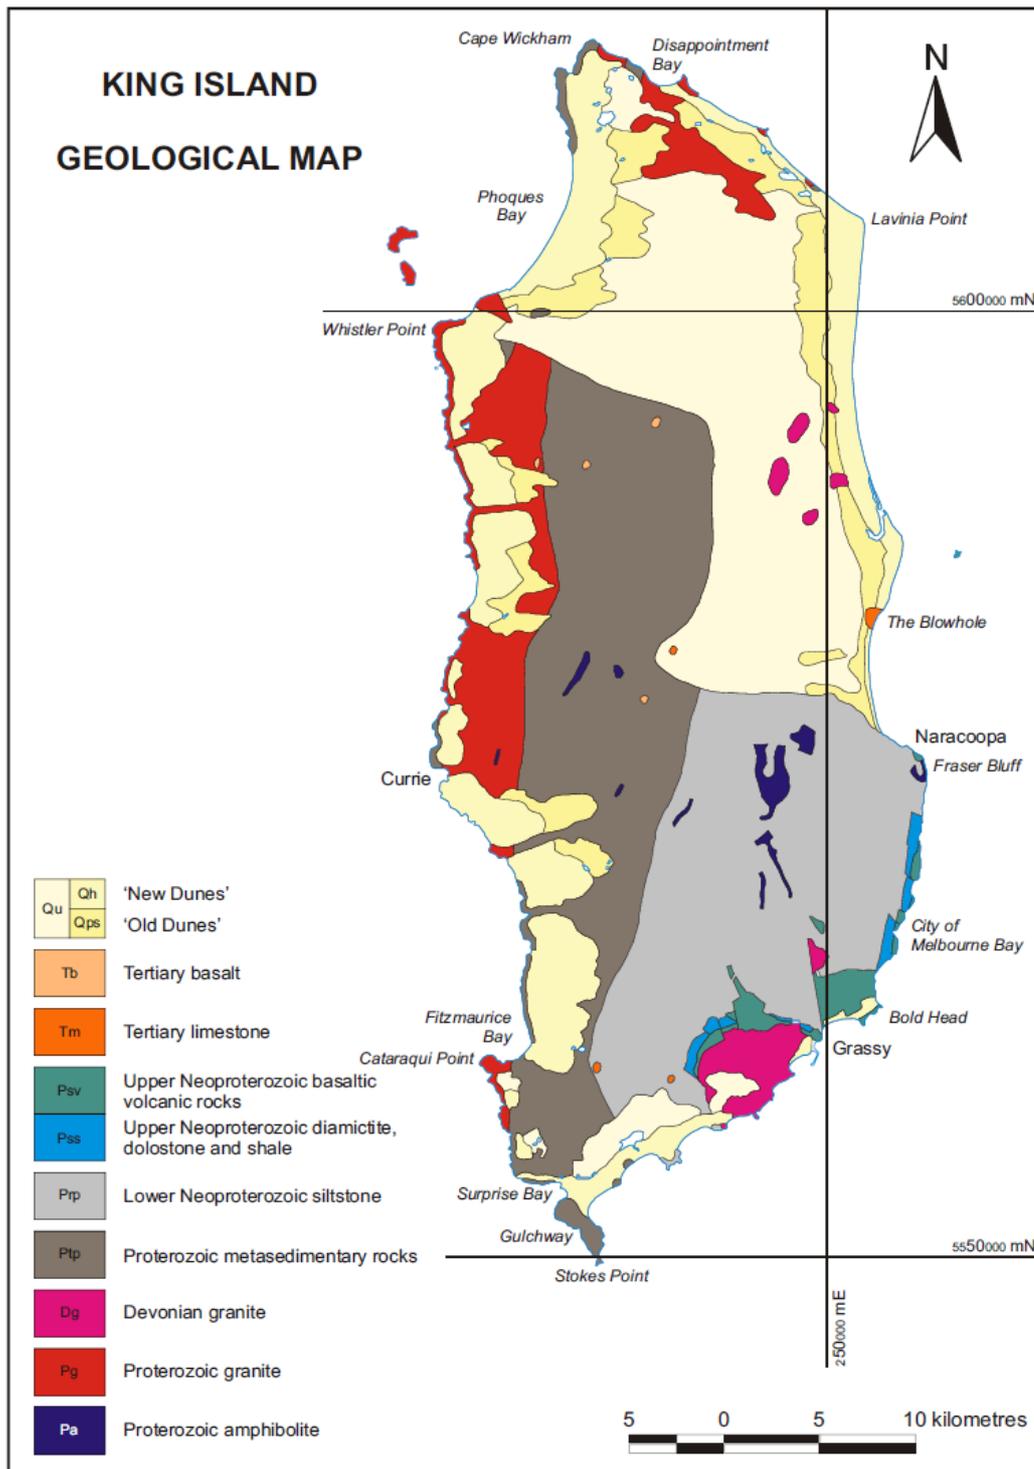


Figure 2. Regional Geology of King Island, (Calver 2007). Coordinates GDA94.

Three granite bodies, the Grassy, Bold Head and Sea Elephant plutons intrude the Proterozoic sediments on the southeast coastline of King Island. The intrusions are classified as I-type monzogranite-granodiorite (Calver, 2007). The Bold Head Granite may be a sliver of the larger Grassy granite, separated by the N-S trending Grassy River Fault (Figures 1 and 2).

The Bold Head Granodiorite is porphyritic with large pink k-feldspar phenocrysts. The mineralogy consists of quartz, k-feldspar, plagioclase, biotite and amphibole with minor apatite, allanite, sphene, magnetite and zircon.

Scheelite skarn mineralisation has formed within the metamorphic aureole of the Bold Head and Grassy Granodiorite plutons where they have come into contact with the calcareous sediments and carbonates of the Lower Grassy Group Cumberland Creek Dolostone. Both the Bold Head and Grassy mineralisation is hosted in a similar stratigraphic sequence, although the carbonate units appear to be thicker in the Grassy area (Danielson, 1975, Figure 2). Mineralisation has formed by selective metasomatism, mainly within and immediately adjacent to carbonate horizons. The deposits formed over a 100-200m sequence of complex skarn mineralogy located in the lower part of the Grassy Group, with two main host horizons known as B and C lens hosted in carbonates of 10-30m thickness separated by a similar thickness of skarn altered volcanic sediments. Mineralisation appears to have occurred where carbonates come into direct contact with the intrusion, or adjacent to brittle faults tapping into the nearby intrusion. Mineralisation grades increase towards major structures such as the Central, Decline and Grassy Faults at Grassy and the Number 2 and Boundary Faults at Bold Head.

Mine sequence rocks have been intensely contact metamorphosed and metasomatised and are described in Geopeko drill logs and maps by the resultant skarn mineralogy and not the stratigraphic protolith described in the regional geology. Geopeko logging codes include:

DDH logging codes

Code	Geology
um	Upper metavolcanics
bh	Biotite-actinolite hornfels
pbh	Pyroxene-biotite hornfels
pgh	Pyroxene-garnet hornfels banded pyroxene andradite skarn (+/- Scheelite)
gh	Garnet hornfels, andradite skarn (+/- Scheelite)
ch	Marble
bf	Banded footwall beds, interbedded marble and biotite-pyroxene grossularite skarn (+/- garnet, Scheelite)
lv	Lower metavolcanics

Mineralisation occurs predominantly as coarse Scheelite with lesser Powellite in either garnet-hornfels, pyroxene garnet hornfels and garnet-pyroxene altered banded footwall beds.

3 EXPLORATION PROSPECTS EL19/2001.

EL19/2001 host several advanced prospects including the Bold Head Resource which forms a significant component of the King Island Project. Minor resource extensions are anticipated from exploration adjacent to the Bold Head Resource. A mine plan is currently being finalized for Bold Head and an ML application will be submitted on completion.

A significant conceptual exploration target is located at South Bold Head. South Bold Head is a purely conceptual exploration target located south of the Graham's Road Fault along the eastern side of the Grassy Fault. The Graham's Road Fault is a ductile shear with a south-side down throw of over 200m. Mine sequence is postulated to occur at depth beneath the outcropping upper volcanics of the Grassy Group.

Detailed geophysical surveys were completed in 1982 and reported in 1983 (Brown, 1983). Gravity surveys indicate a number of residual bouger anomaly highs and lows suggestive of a granite surface similar to the Bold Head setting. The presence of the upper volcanic sequence suggests there is the potential for a deep target (800m+) adjacent to the Grassy River Fault on its eastern margin. Although conceptual this target has the potential to host a world class deposit the size of the Dolphin Mine.

A seven kilometer length of Grassy Group volcanics is exposed along the northern and western margin of the Grassy Granite. The contact has been loosely defined by first pass drilling, mapping and magnetic surveys through exploration activities of the previous mine operators. Significant exploration prospects have been located further west of the Dolphin Mine adjacent to the Grassy Granite. The two most advanced of these include Grassy West and Investigator 21, both of which have several significant Scheelite intersections hosted in similar metasomatised lower Grassy Group lithologies as the Bold Head and Dolphin Deposits.

These targets have two of the three components required for large Dolphin style skarn deposits, proximity to the granite and calcareous host lithologies. The third criteria of major brittle fault structures remain to be identified. Additional detailed exploration is required including collation of drilling data and geological information and interpretation of gravity and genetic data followed by further targeted exploration drilling.

EL19/2001 of strategic importance to the King Island Scheelite project and maintaining tenure of the EL is important for the longevity of the King Island Scheelite Project.

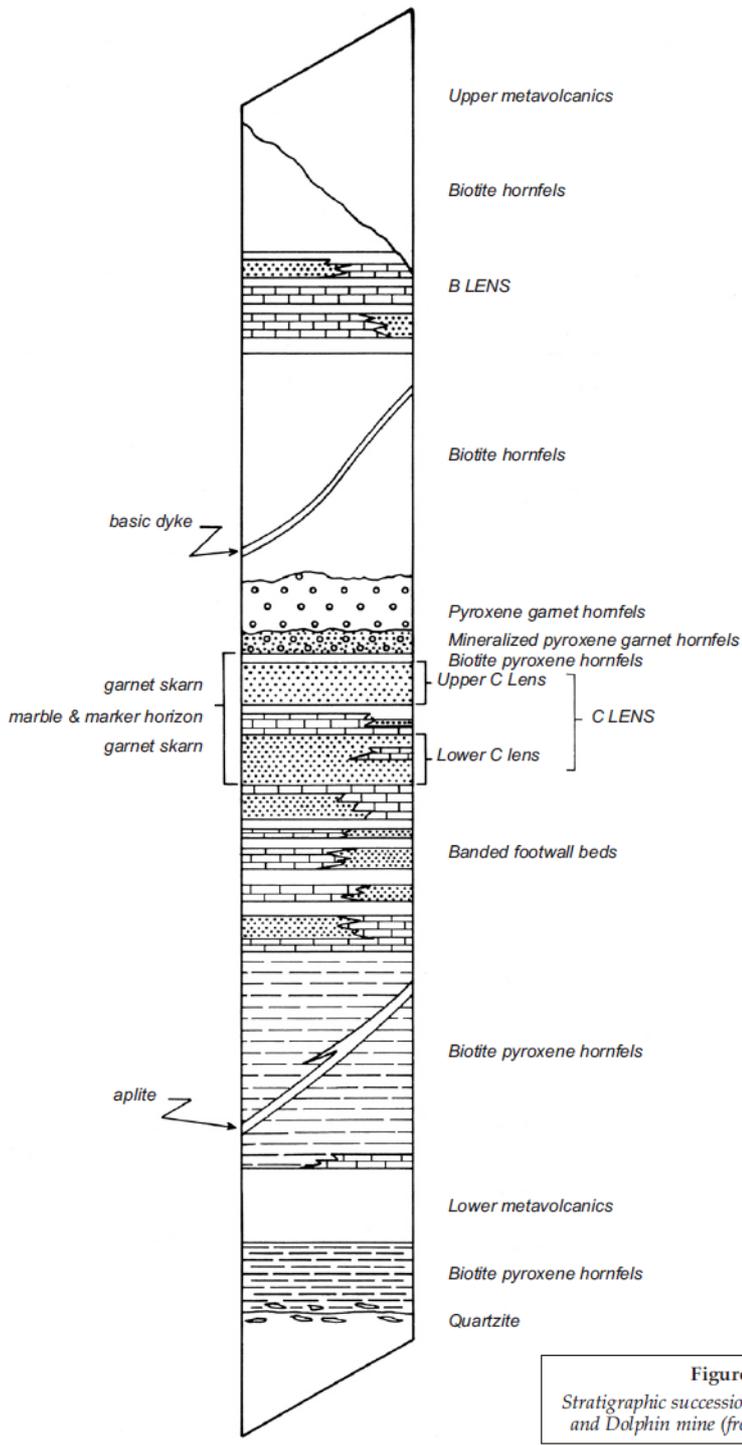


Figure 4
 Stratigraphic succession, No. 1 Open Cut
 and Dolphin mine (from Brown, 1990).

Figure 3. Stratigraphic column of the Grassy Group host sequence in the Grassy open cut (from Brown, 1990). The sequence is very similar to the Bold Head sequence 3km north.

4 WORK COMPLETED 2011

During 2011 KIS focused on technical studies required for a Definitive Feasibility Study of the King Island Scheelite Project.

No exploration work was directly undertaken on EL19/2001 during 2011. The Tailings Reclamation and Construction Project, Environmental Effects Report and Financial Model require input from EL19/2001 and will effect future developments on the EL.

Technical studies completed on the KIS project during 2011 include:

- Tailings Storage Facility Resource and Reserve Estimation (Callaghan, 2011a, Callaghan, 2011b)
- Tailings Reclamation and TSF storage construction (GHD, 2011)
- Environmental Effects Report for the KIS project (Boardman, 2011)
- Metallurgical testwork of the Dolphin Deposit (Johns and Mooney, in progress)
- Metallurgical testwork of the Historic Tailings (Mooney, in progress)
- Dolphin Revised Mining Plan (Fudge, 2011)
- Process Flow Sheet Design (GR Engineering, *in progress*)
- Mining Cost Estimation (Mancala Mining, in progress)
- Processing Cost Estimation (GR Engineering, 2011)

Drilling programs completed on the project (1M/2006) during 2011 include:

- A 3 hole diamond drilling exploration program for 946.7m was completed on ML 1M/2006 testing the southern extension of the Dolphin Resource.
- A 112 hole reverse circulation air core drilling program for 1212m was completed on the TSF as part of the Tailings reclamation and construction project.

5 PROPOSED WORK PROGRAM 2012

The project work program for 2012 is scheduled to include:

- Completion of the DFS
- Mine dewatering and rehabilitation
- Mill engineering, procurement and construction
- Infrastructure development.
- Commissioning and production is expected to commence in 2013.
- ML application for the Bold Head Mine

Because of the focus on construction and commissioning a limited exploration program is anticipated for 2012. Exploration work is likely to involve historic data collation and targeting in preparation for future exploration drilling programs. Exploration drilling of the tenement package is likely to resume in 2013 once mining operations have commenced.

An ML application will be made over the area of EL19/2001 that covers the Bold Head Mine once mine plans have been finalized.

ADDITIONAL NOTES

LIMITATIONS AND CONSENT

The report is provided to the King Island Scheelite Project in the context of an Annual Report and should not be used or relied upon for any other purpose.

This report has been prepared using information available to the Author at the time of writing. The opinions stated herein are given in good faith and with the belief that the basic assumptions are factual and correct and the interpretations reasonable.

This report is not intended for the use as a public document nor, in whole or in part, in a public document without written consent to the form and context in which it appears.

COMPETENT PERSON AND JORC CODE

The information within this report that relates to Mineral Resources and Reserves and Exploration Results is based on information compiled by Mr Tim Callaghan who is a consultant geologist working for King Island Scheelite. Tim is a Member of the Australasian Institute of Mining and Metallurgy (AUSIMM) and has sufficient experience in the styles of mineralisation and types of deposits in consideration to qualify as a competent person according to the 2004 edition of the Australasian Code for reporting Exploration Results, Mineral Resources and Ore Reserves (the JORC Code). He consents to the inclusion of this material in the form and context in which it appears in this report.

The information within this report that relates to Mineral Reserves is based on information compiled by Consultant Mining Engineer Mr Alan Fudge of Polberro Consulting, who is a Member of The Australasian Institute of Mining and Metallurgy ("AusIMM") and has a minimum of five years experience in the estimation, assessment and evaluation of Mineral Reserves of this style and is a Competent Person as defined in the JORC Code (2004). This announcement accurately summarises and fairly reports his estimations and he has consented in writing to this review in the form and context in which it appears.

STATEMENT OF INDEPENDENCE

Tim Callaghan has no material interest or entitlement in the securities or assets of the King Island Scheelite project or any associated companies.

All coordinates in this report are recorded in AGD94 Zone 55

REFERENCES

- Boardman, 2011. Environmental Effects Report, Amended Mining Operations of the King Island Scheelite Mine, Grassy King Island. October 2011. *Unpublished consultants report for King Island Scheelite.*
- Brown, SG, 1981. Six Monthly Report to the Mines Department, Report No KI/81/5 *Unpublished company report for Warman Services Ltd.*
- Callaghan, TJ, 2011a. King Island Tailings Mineral Resource Estimation. *Unpublished consultants report for King Island Scheelite.*
- Callaghan, TJ, 2011b. King Island Tailings Mineral Reserve Estimation. *Unpublished consultants report for King Island Scheelite.*
- Calver CR, 2007. Some Notes on the Geology of King Island. *Tasmanian Geological Survey Record 2007/02.*
- Cox, S F, 1989. 'Cape Wickham' in Burrett, CF and Martin CF, (editors) Geology and Mineral Resources of Tasmania, *Special Publication Geological society of Australia*, vol15, pp26 - 27
- Danielson MJ, 1975. King Island Scheelite deposits. In Knight CL (editor), Economic Geology of Australia and Papua New Guinea. *Monograph Serial Australian Institute of Mining and Metallurgy.*
- Fudge, A, 2011. Mining Inventory and Grade Tonnage Estimates from a 0.50% WO3 Perimeter Data Set. *Unpublished consultants report for King Island Scheelite.*
- GHD, 2011. Report for King Island Feasibility Study, Tailings Reclamation and Disposal. *Unpublished GHD Report 55371 for King Island Scheelite.*
- GR Engineering, 2011. Dolphin Project Process design. 11806 00041 Dolphin Project FS_REV A – RES. *Unpublished GR Engineering Report for King Island Scheelite.*
- Meffre S, Direen NG, Crawford AJ, and Kamenetsky V, 2004. Mafic Volcanic rocks on King Island, Tasmania: Evidence for 579Ma break up in East Gondwana. *Precambrian research*, vol. 135 pp177 – 191.
- Turner NJ, Black LP, and Kamperman M, 1998. Dating of Neoproterozoic and Cambrian Orogenies in Tasmania. *Australian Journal of Earth Sciences*, vol 45, pp 789 – 806.