

MAP 6 – HYDROGEOLOGICAL INVENTORY



These maps are complementary to the 1:250,000 scale hydrogeological maps which use as a basis, a compiled 1:250,000 scale geology layer (derived from 1:25,000, 1:50,000, 1:63,360 scale geological maps) together with some areas where only reconnaissance mapping is available. These 1:100,000 scale maps are easier to read and use the regional groundwater prospectivity boundaries from the 1:250,000 scale maps as background information in the absence of more detailed hydrogeological coverage across the whole State. They should be used in conjunction with the 1:250,000 scale maps and other more detailed hydrogeological maps and site specific reports, if available, as a preliminary to more intensive groundwater studies in a particular area. If additional projects are undertaken in targeted priority areas of the State, these maps can be further developed and made more site specific.


Boreholes shown on the map are those with locations mainly supplied by drillers and from location in the field by MRT staff. There are many open boreholes installed for investigation and production purposes in coastal sand deposits in Tasmania that may not be shown on these maps at this stage. Boreholes which have been considered as successful boreholes. Outputs of boreholes are those supplied by drillers and are mostly the result of short term pumping measurements. Some boreholes have not been reported. Boreholes reported as dry holes usually have a small unreported yield (<0.01 L/s).

Small elevated areas of any hydrogeological unit will usually have lower prospectivity because of limited storage and high drainage rates. In areas where there is little or no water bore data (e.g. Southern Tasmania), the groundwater prospectivity has been assumed to be similar to that in the areas where data are widely available. In areas of low rainfall, water quality can be poorer and water usage may be limited.

These maps provide some additional information to the 1:250,000 scale hydrogeological maps in that there are some subdivisions of Permian and Triassic age units. There is some difference in hydrogeological properties and prospectivity between these units. For example the Upper Triassic (the sandstone, mudstone and coal measures) has lower prospectivity and poorer quality groundwater than the Lower Triassic and Permian rocks in most locations. The three dimensional shaded effect enables users to understand the spatial relationship between adjoining groundwater units.

There is usually a degree of vertical stratification in the groundwater quality within the aquifers and results presented represent a composite value of salinity from drill holes at a particular site. Natural groundwater quality is influenced by ground level and the evaporation (e.g. high rainfall, low evaporation areas tend to have better quality groundwater than low rainfall, high evaporation areas). The composition of the rock types through which the groundwater passes and is stored in and by physical properties of the rocks such as permeability and porosity. Human activities such as extensive groundwater pumping, pollution from various waste disposal activities and use of chemicals (agriculture, forestry, industry etc.) also may have negative effects on groundwater quality.

The geology including aquifer prospectivity, groundwater and the relationship between surface water, groundwater and rainfall at a particular area are important considerations to resource and other groundwater related water studies. The attached average rainfall map can be used to make some general deductions about the possible link between the above-mentioned water balance factors. Climate has an effect on quantity and quality of groundwater and surface water. At least four elements are required to supply water to a borehole. First all groundwater derived under most conditions. In areas with unconfined shallow aquifers groundwater pumping near the rivers may result in the reverse water flow from the river towards the groundwater and result in decreased river flow. These maps provide preliminary information for more detailed groundwater and surface water studies.

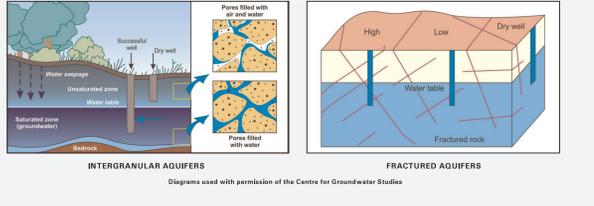

AQUIFER TYPE	PROSPECTIVITY (High to Low)	ROCK GROUPS	VULNERABILITY TO POLLUTION
POROUS (INTERGRANULAR)	HIGH	Quaternary aeolian deposits marginal to the coast consisting of fine to medium grain size sands.	High.
POROUS (INTERGRANULAR)	MODERATE-HIGH	Quaternary coastal plain deposits consisting of sand, clayey sand, silt deposits and gravel underlying areas near the coast.	Moderate to high. Depends on permeability of the material that overlies the aquifer.
POROUS (INTERGRANULAR)	LOW-MODERATE	Quaternary alluvium (clay, sand and gravel with varying clay content) and lake (boulder deposits).	Low to high. Low where clay material overlies aquifer. High where there is no clay.
POROUS (INTERGRANULAR)	LOW-HIGH	Triassic sandstone, clay and gravel of non-marine origin (locally alluvial deposits). Minor interstratified (mainly origin). Variable thickness up to several hundred metres.	Low to high. Low where clay overlies aquifers. High where gravel aquifers come to the surface.
FRACTURED ROCK (intergranular or some fractured)	HIGH	Triassic, quartzite and lithic sandstones, mudstone, minor coal. Tertiary origin (R, Rv, Rv).	High unless a layer of low permeability material overlies the aquifer.
FRACTURED ROCK	MODERATE-HIGH	Permian mudstones, shales and sandstones (often pebbly), minor limestone, conglomerate and siltstone. Many marine origin (P).	Very high - unless a layer of low permeability material overlies the aquifer.
FRACTURED ROCK	HIGH	Ordovician to Devonian turbidite sequence of sandstone and mudstone (Murray Supergroup). Ordovician limestone, Cambrian volcanics and sediments. Neoproterozoic sandstone, slate, quartzite and dolomite.	High. Very occasionally deep clay soils may offer some protection and lower vulnerability.
FRACTURED ROCK	MODERATE	Tertiary basalt.	Moderate. Can be high if fractured zones are not overlain by low permeability material.
FRACTURED ROCK	LOW-MODERATE	Jurassic - Silurian. Triassic basalt - St Marys. Tertiary basalt - Scottsdale, Ringarooma, Tamar and Devonian granite rocks.	Low to moderate. Can be high if highly fractured zones not covered by clay.
FRACTURED ROCK	LOW	Devonian granite rocks. Cambrian mafic ultramafic complexes (pentrite, soapstone, diorite dykes). Precambrian granite.	Low to moderate. Can be high if highly fractured zones not covered by clay.

GROUNDWATER FEATURE
Feature type: Yield and accuracy. Salinity: TDS.

GROUNDWATER FEATURE TYPE AND ACCURACY
Borehole location accuracy: 1-500 metres, 500-2000 metres, 2000-5000 metres, 5000-20000 metres. Spot point location accuracy: 1-500 metres, 500-2000 metres. Well, dug well location accuracy: 1-500 metres, 500-2000 metres.

BOREHOLE YIELD
Litres / second. Potential usage of groundwater based on borehole yield. Legend: Unknown, 0 (Dry), < 0.05, 0.05 - 0.5, 0.5 - 1.5, 1.5 - 5.0, 5.0 - 10.0, > 10.0.

SALINITY - TDS
Milligrams / litre. Legend: Unknown, < 300, 300 - 1000, 1000 - 1500, 1500 - 3000, 3000 - 7000, > 7000.

POTENTIOMETRIC CONTOURS
Legend: Tertiary Aquifers (5m contour interval), Longford Area (Geological Bulletin 59), Potentiometric surface contours (10m contour interval), Great Forester River Catchment (NE Tasmania), Great Forester River Catchment in Tertiary basalt (10m contour interval), Potentiometric surface contours in Tertiary basalt (10m contour interval), Tertiary age deep lead - position approximate (Great Forester River Catchment (NE Tasmania)).

SALINITY CONTOURS
Legend: Salinity contours of deeper Tertiary Aquifers (500 mg/L contour interval), Longford Area (Geological Bulletin 59).

MEAN ANNUAL RAINFALL
Legend: 500, 1000, 1500, 2000, 2500, 3000, 3500 mm.

GROUNDWATER QUALITY
Expressed as Total Dissolved Solids (TDS) in mg/L. Legend: < 500, 500 - 1000, 1000 - 1500, 1500 - 3000, 3000 - 7000, > 7000.

Potential usage of groundwater based on water quality
Legend: All purposes, domestic and irrigation; Most purposes, general upper limit for irrigation; Most purposes, upper limit for drinking, limited irrigation; All livestock, very limited irrigation; Most livestock (not pigs or horses); Limited stock use (beef cattle, sheep).

INDEX TO ADJOINING MAP SHEETS

WARNING: INKS ARE LIGHT SENSITIVE

Scale: 1:100000
CGD6 - AMG Zone 55
Contour Interval: 10 metres

These maps were derived from the Tasmanian Geological Atlas 1:250,000 digital data and Mineral Resources Tasmania Groundwater data base (BORIS) and are based upon the potential for groundwater within broad rock groups.

Other groundwater and hydrogeological maps and reports are available from Mineral Resources Tasmania. Borehole data is available from the Mineral Resources Tasmania web site - www.mrta.tas.gov.au

This map is the result of a number of years of groundwater potential and salinity data and is indicative only. This map does not indicate the need for site specific investigations. Groundwater potential data compiled by: W.L. Matthews B.Sc. and M.J. Larkins B.Sc.(Hons) MAP 6

Base map from the LIST - State of Tasmania

Base map first published: July 2006

While every care has been taken in the preparation of this data, the Tasmanian Geological Survey does not accept any liability for any loss or damage arising from the use of this data.

Copyright © 2006, Department of Infrastructure, Energy and Resources, Tasmania. All rights reserved. This document is the property of the Department of Infrastructure, Energy and Resources, Tasmania. It is to be used only for the purposes for which it was prepared and no part of it may be reproduced without the written permission of the Department of Infrastructure, Energy and Resources, Tasmania.