


# MAP 4 – HYDROGEOLOGICAL INVENTORY

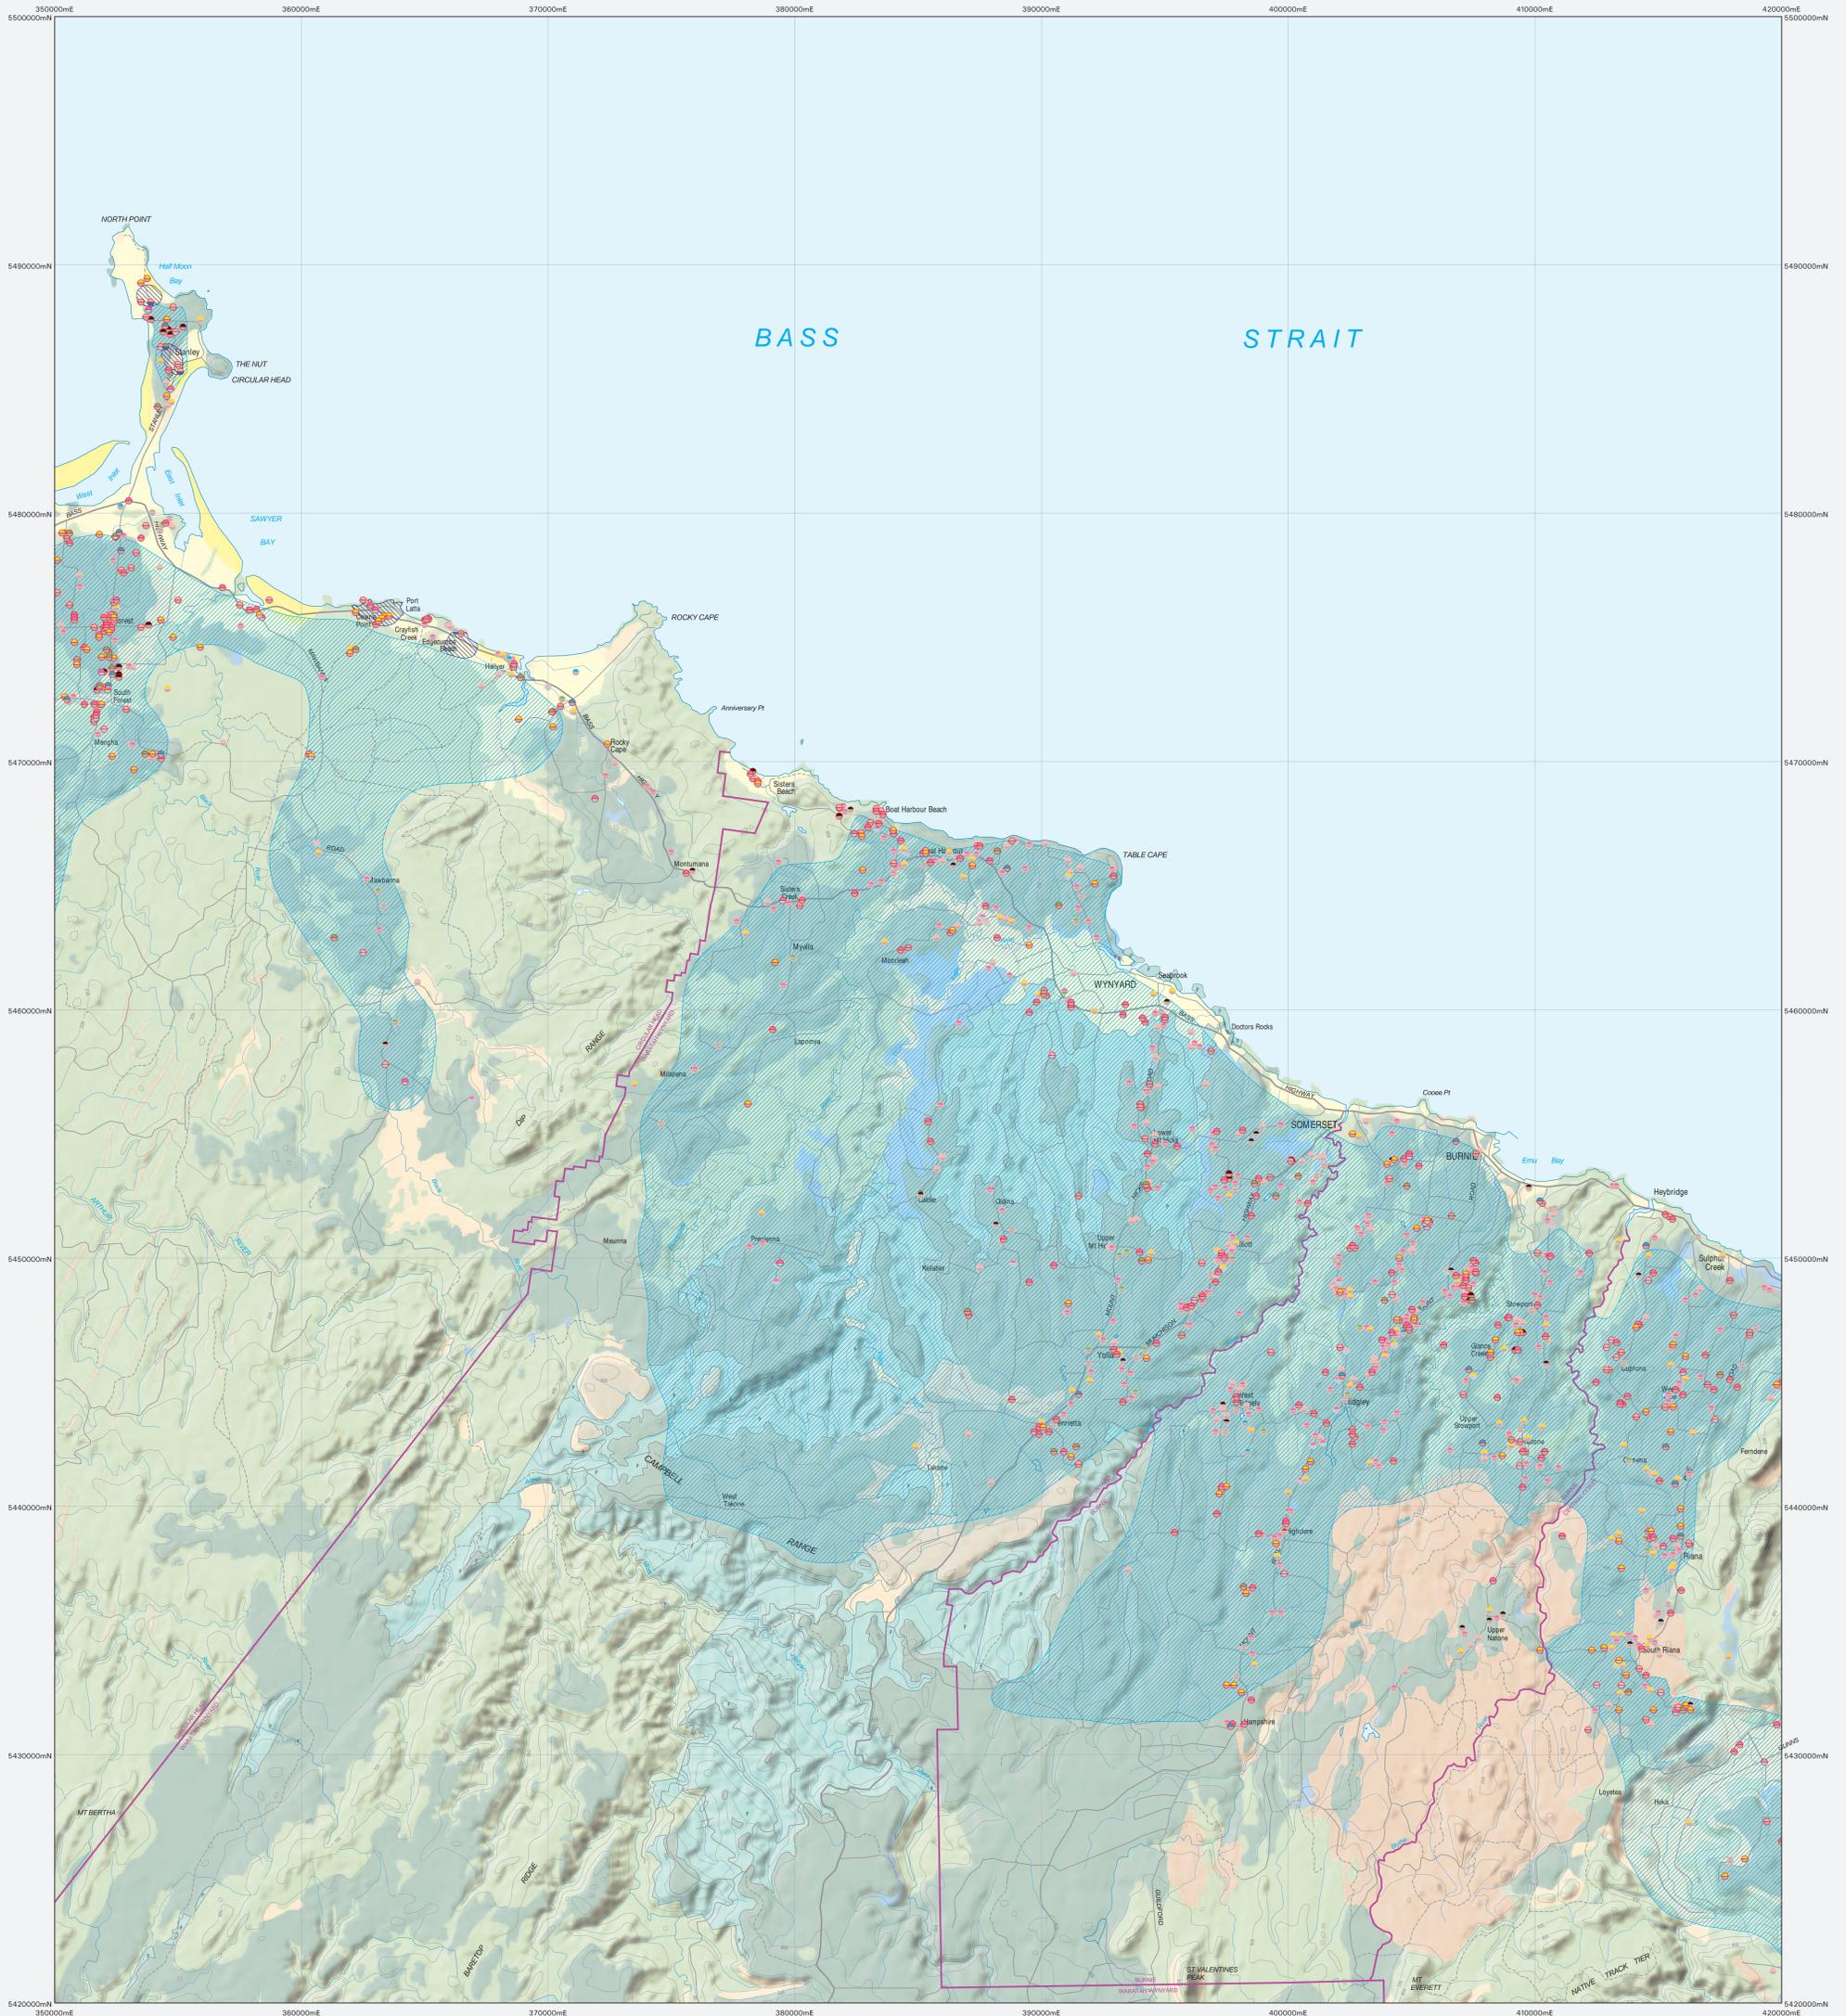


These maps are complementary to the 1:250,000 scale hydrogeological maps which use as a basis, a combined 1:250,000 scale geology layer (derived from 1:25,000, 1:50,000, 1:63,360 scale geological maps together with some areas where only reconnaissance mapping is available). These 1:100,000 scale maps are easier to read and use the regional groundwater prospectivity boundaries from the 1:250,000 scale maps as background information in the absence of more detailed hydrogeological coverage across the whole State. They should be used in conjunction with the 1:250,000 scale maps and other more detailed hydrogeological maps and site specific reports, if available, as a primary to more intensive groundwater studies in a particular area. If additional projects are undertaken in targeted prioritised areas of the State, these maps can be further developed and made more site specific.

Boreholes shown on the map are those with locations mainly supplied by drillers and from location in the field by MRT staff. There are many open boreholes installed for investigation and production purposes in coastal sand deposits in Tasmania that may not be shown on these maps at this stage. Boreholes with yields >0.03 L/s have been considered as successful boreholes. Outputs of boreholes are those supplied by drillers and are mostly the result of short term pumping measurements. Some boreholes have been successful but outputs have not been reported. Boreholes reported as dry holes usually have a small unreported yield (<0.03 L/s).

Small elevated areas of any hydrogeological unit will usually have lower prospectivity because of limited storage and high drainage rates. In areas where there is little or no water bore data (e.g. Southern Tasmania), the groundwater prospectivity has been assumed to be similar to that in the areas where data are widely available. In areas of low rainfall, water quality can be poorer and water usage may be limited.

These maps provide some additional information to the 1:250,000 scale hydrogeological maps in that there are some subdivisions of Permian and Triassic age units. There is some difference in hydrogeological properties and prospectivity between these units. For example, the Upper Triassic fine sandstones, mudstones and coal measures has lower prospectivity and poorer quality groundwater than the Lower Triassic and Permian rocks in most locations. The three dimensional shade effect enables users to understand the spatial relationships between adjoining units. There is usually a degree of vertical stratification in the groundwater quality within the aquifers and results presented represent a composite value of salinity from drill holes at a particular site. Highest groundwater quality is indicated by annual rainfall and the evaporation (e.g. high rainfall, low evaporation areas tend to have better quality groundwater than low rainfall, high evaporation areas). The composition of the rock types through which the groundwater passes and is defined by physical properties of the rocks such as permeability and porosity. Human activities such as extensive groundwater pumping, pollution from various waste disposal activities and use of chemicals (agriculture, forestry, industry etc.) also may have negative effects on groundwater quality. The geology including aquifer prospectivity, groundwater quality and the relationship between surface water, groundwater and rainfall at a particular area are important considerations in resource and other groundwater related water studies. The attached average rainfall map can be used to make the general deductions about the possible link between the above-mentioned water features. Climate has an effect on quantity and quality of groundwater surface water. At least low level groundwater and spring water is largely, if not all groundwater derived under most conditions. In areas with unconfined shallow aquifers groundwater pumping near the rivers may result in the reverse water flow from the rivers towards the groundwater and result in decreased river flow. These maps provide preliminary information for more detailed groundwater and surface water studies.

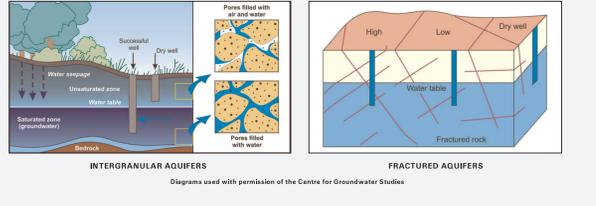

AQUIFER TYPE	PROSPECTIVITY (State of Tasmania)	ROCK GROUPS	VULNERABILITY TO POLLUTION
POROUS (INTERGRANULAR)	HIGH	Quaternary aeolian deposits marginal to the coast consisting of fine to medium grain size sand.	High.
POROUS (INTERGRANULAR)	MODERATE - HIGH	Quaternary coastal plain deposits consisting of sand, clayey sand, silty deposits and gravel underlying areas near the coast.	Moderate to high. Depends on permeability of the material that overlies the aquifer.
POROUS (INTERGRANULAR)	LOW - MODERATE	Quaternary alluvium (clay, sand and gravel with varying clay content) and lake (boulder deposits). Sand gravel and mud of alluvial, lacustrine and fluvial origin. Minor windblown sands on sloping bedrock.	Low to high. Low where clay material overlies aquifer. High where there is no clay.
POROUS (INTERGRANULAR)	LOW - HIGH	Tertiary sedimentary clay, sand and gravel of non marine origin (lacustrine alluvial deposits). Minor interstratified (thinly bedded) sandstone. Variable thickness up to several hundred metres (m). (P)	Low to high. Low where clay overlies aquifers. High where gravel aquifers come to the surface.
FRAGMENTED ROCK (intergranular on some horizons)	HIGH	Triassic, quartzites and lithic sandstones, mudstones, minor coal. Tertiary origin (R, Rv, Rv).	High - unless a layer of low permeability material overlies the aquifer.
FRAGMENTED ROCK	MODERATE - HIGH	Permian mudstones, shales and sandstones (often pebbly), minor limestone, conglomerate and tillite. Many main range (P)	Very high - unless a layer of low permeability material overlies the aquifer.
FRAGMENTED ROCK	HIGH	Tertiary basalt.	High. Very occasionally deep clay soils may offer some protection and lower vulnerability.
FRAGMENTED ROCK	MODERATE	Jurassic - Silurian. Triassic - Devonian. St Marys. Tertiary basalt - Scottsdale, Ringarooma, Tamar and Devon Creek.	Moderate. Can be high if fractured zones are not overlain by low permeability material.
FRAGMENTED ROCK	LOW - MODERATE	Devonian granitic rocks. Devonian mafic ultramafic complexes (pentrite, serpentinite, chlorite dykes). Precambrian granite.	Low to moderate. Can be high if highly fractured zones not covered by clay.

**GROUNDWATER FEATURE**  
Feature type — Yield and accuracy — Salinity - TDS

**GROUNDWATER FEATURE TYPE AND ACCURACY**

- Borehole location accuracy: 1-500 metres, 500-2000 metres, 2000-5000 metres, 5000-20000 metres, 20000-50000 metres
- Spot point location accuracy: 1-500 metres, 500-2000 metres, 2000-5000 metres, 5000-20000 metres
- Well, dug well location accuracy: 1-500 metres, 500-2000 metres, 2000-5000 metres, 5000-20000 metres

**BOREHOLE YIELD**  
Litres / second Potential usage of groundwater based on borehole yield

- Unknown
- 0 (Dry)
- < 0.05: Limited use for domestic and stock
- 0.05 - 0.5: Domestic, stock, garden
- 0.5 - 1.5: Domestic, stock, garden, limited irrigation
- 1.5 - 5.0: Domestic, stock, garden, moderate area irrigation, small communities
- 5.0 - 10.0: Domestic, stock, garden, large area irrigation, small towns, supplement to larger towns
- > 10.0: Domestic, stock, garden, large area irrigation, small towns, supplement to larger towns

Outputs of boreholes are those supplied by drillers and are mostly the result of short term pumping measurements. Outputs may not be suitable for long periods of continuous pumping. Boreholes reported as dry holes usually have small unreported yields up to 0.03 L/s. All boreholes shown are those recorded in the Mineral Resources Tasmania groundwater database BORIS data as at 18-SEP-2006.

Conversion factors:  
1 litre per second = 800 gallons per hour = 8.6 millimetres per hectare per day = 1.2 acre inches per day

**SALINITY - TDS**  
Milligrams / litre

- Unknown
- < 500
- 500 - 1000
- 1000 - 1500
- 1500 - 3000
- 3000 - 7000
- > 7000

**POTENTIOMETRIC CONTOURS**

- 10m: Potentiometric contours of deeper Tertiary Aquifers (5m contour interval) Longford Area (Geological Bulletin 59)
- 10m: Potentiometric surface contours (10m contour interval) Great Forester River Catchment (NE Tasmania)
- 10m: Potentiometric surface contours in Tertiary basalt (10m contour interval) Great Forester River Catchment (NE Tasmania)
- Tertiary age deep lead - position approximate Great Forester River Catchment (NE Tasmania)

**SALINITY CONTOURS**  
500 mg/L contour interval Longford Area (Geological Bulletin 59)

**GEOLOGY (TRIASSIC / PERMIAN)**

- Undifferentiated Triassic sediments (P)
- Upper Triassic sediments - shaly sandstone, siltstone, mudstone, limestone, etc. (R, Rv, Rv)
- Lower Triassic sediments - shaly sandstone, siltstone, mudstone, limestone, etc. (P)
- Permian sediments (P)

**Scale: 1:100000**  
Scale bar: 0, 2, 4, 6, 8, 10 km  
AGD86 - AMG Zone 55  
Contour interval: 100 metres

**MEAN ANNUAL RAINFALL**  
Rainfall map of Tasmania showing mean annual rainfall in millimetres. Legend: 500, 1000, 1500, 2000, 2500, 3000, 3500 mm.

**GROUNDWATER QUALITY Expressed as Total Dissolved Solids (TDS)**  
TDS in mg/L

- < 500: All purposes, domestic and irrigation
- 500 - 1000: Most purposes, upper limit for drinking, limited irrigation
- 1000 - 1500: Most purposes, general upper limit for irrigation
- 1500 - 3000: All livestock, very limited irrigation
- 3000 - 7000: Most livestock (not pigs or horses)
- > 7000: Limited stock use (beef cattle, sheep)

Areas of similar groundwater quality across different rock types are shown by shading as above. Solid lines indicate deep aquifers while broken lines - - - - - indicate shallow aquifers. Boundaries are approximate only.

These are general limits for the use of groundwater. The use of water for irrigation with the higher levels of salinity in the above table should only be considered on particularly suitable soil types with the adoption of specific management practices, or if the bore water is mixed with fresh water. For further information see Australian and New Zealand guidelines for fresh and marine water quality.

Other groundwater and hydrogeology maps and reports are available from Mineral Resources Tasmania. Borehole data is available from the Mineral Resources Tasmania web site - [www.mrt.tas.gov.au](http://www.mrt.tas.gov.au)

Base date from the LIST - State of Tasmania

Index to adjoining map sheets

WARNING: INKS ARE LIGHT SENSITIVE

coversprojctas, prospectivity/amlm/gw1003d.dmi

Profile for this map generated from digital data: September 19, 2006