


MAP 16 – HYDROGEOLOGICAL INVENTORY

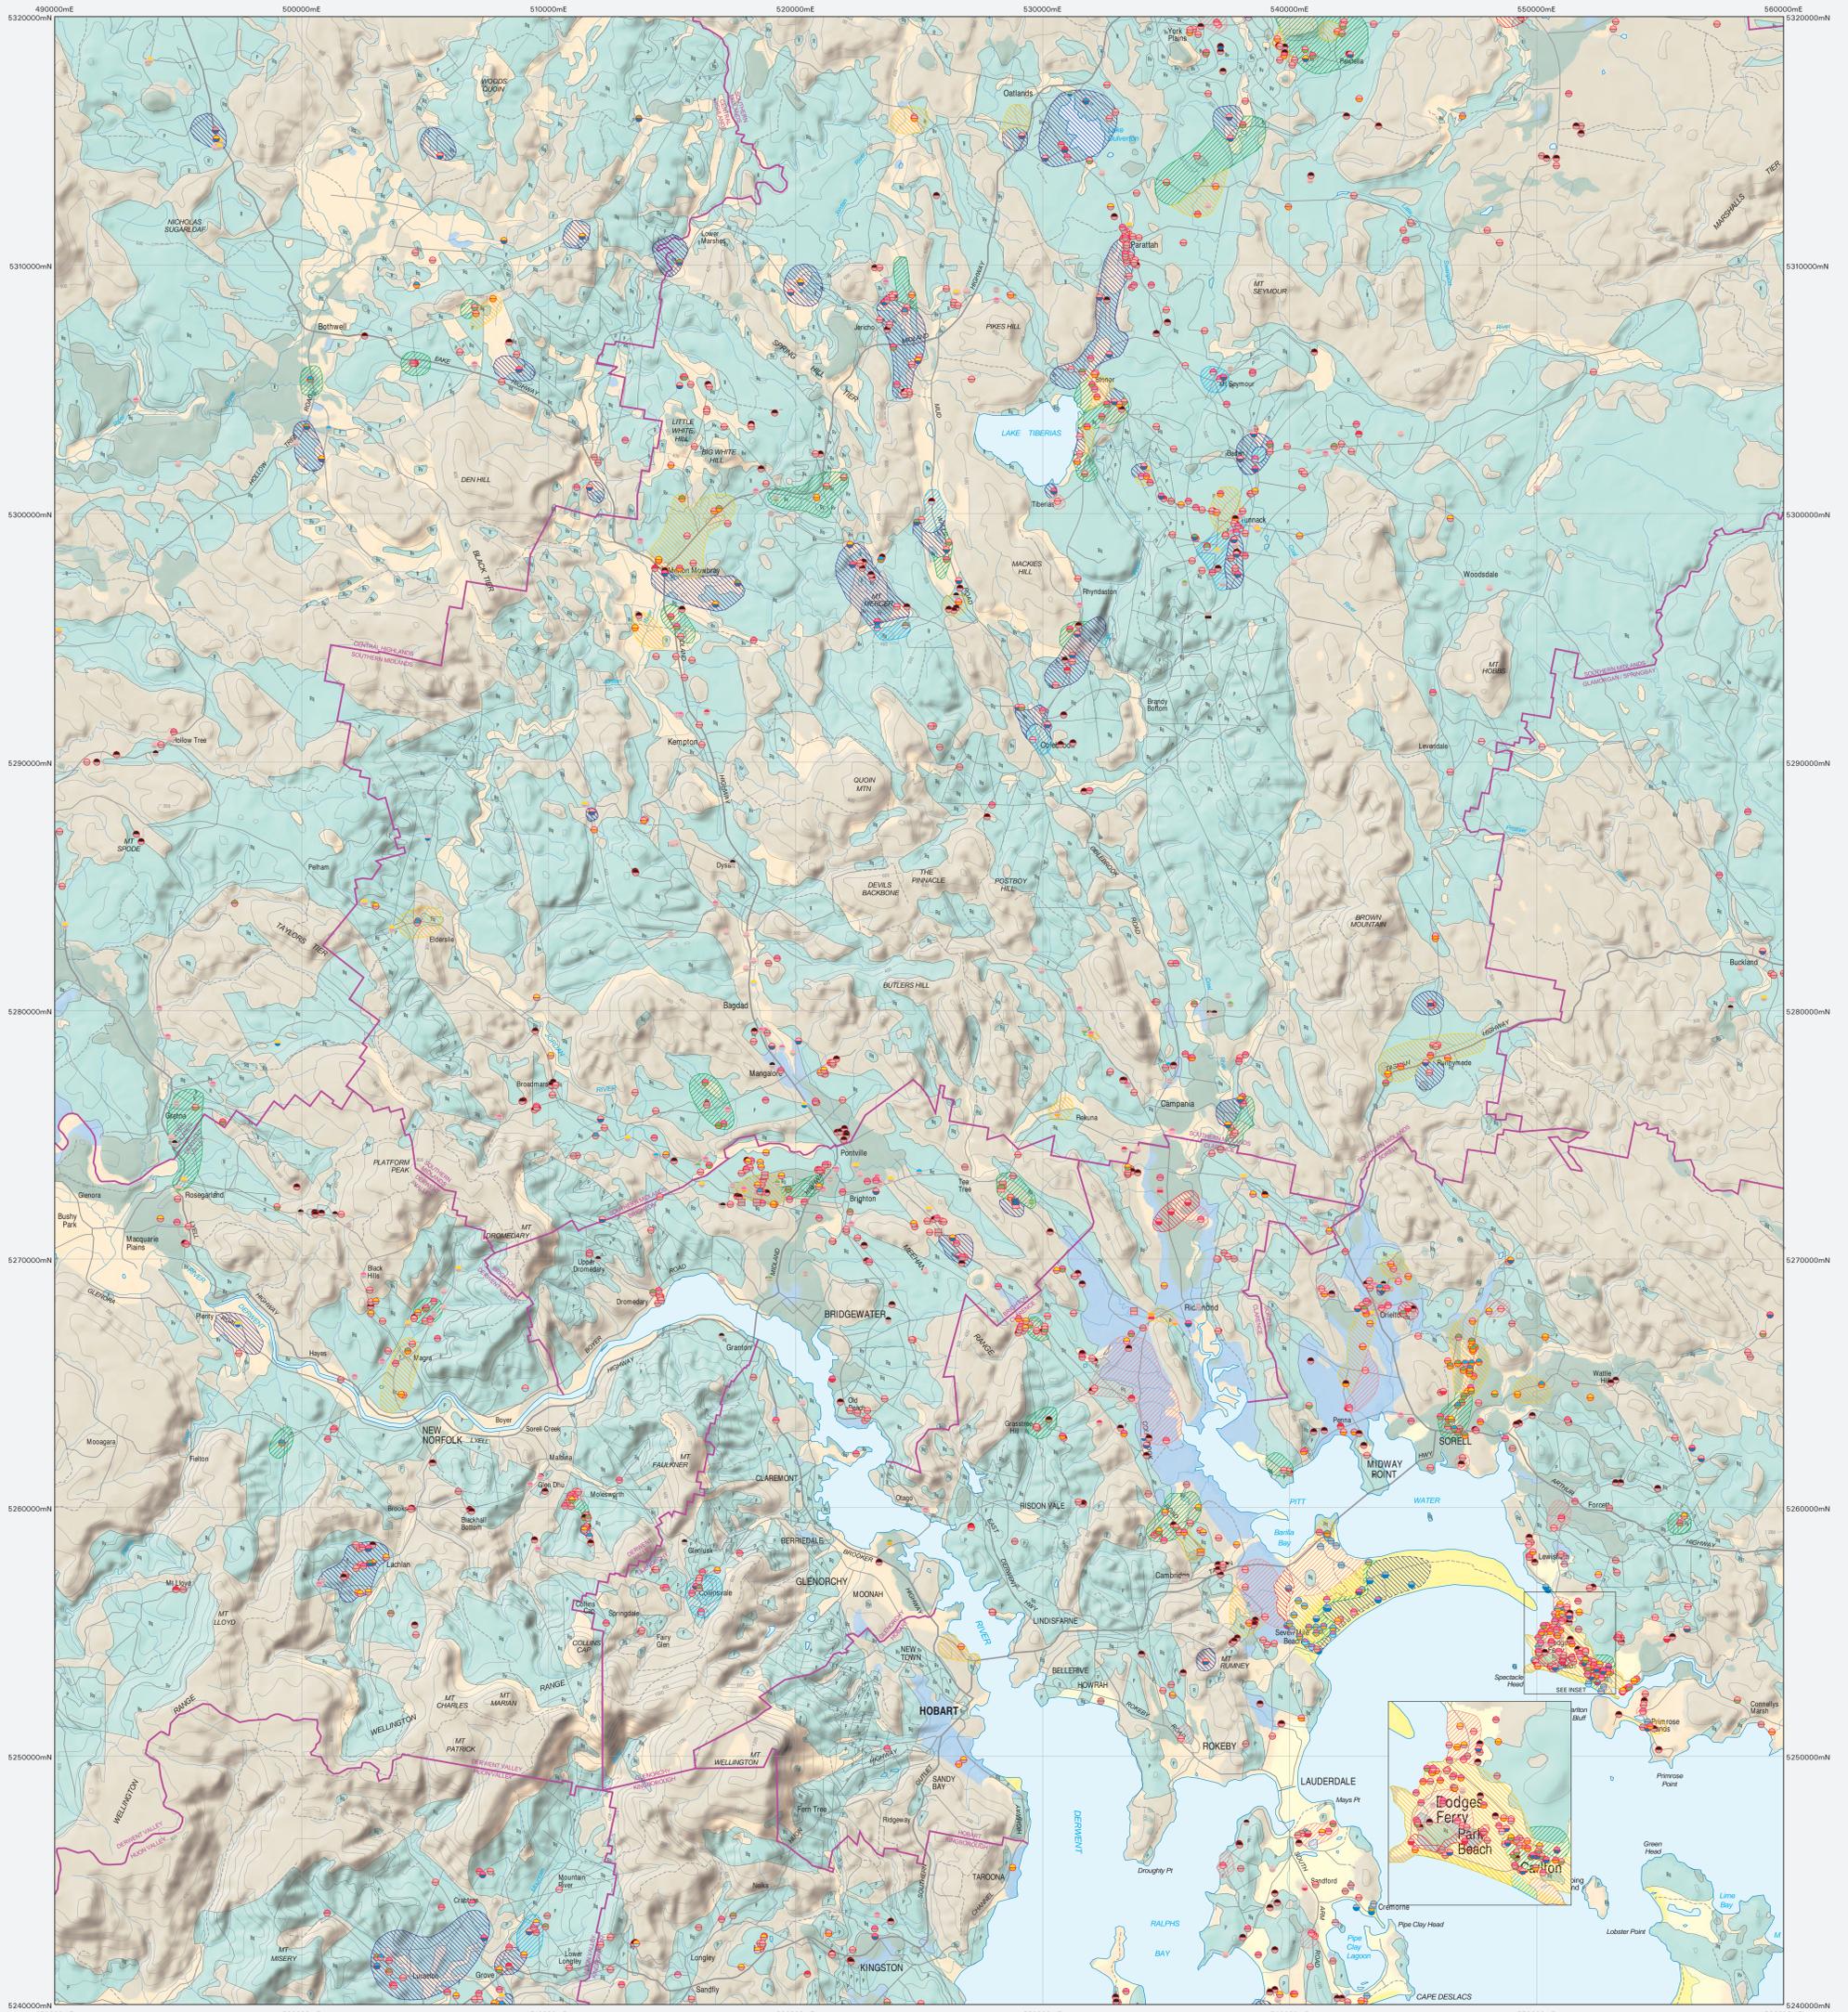

These maps are complementary to the 1:250 000 scale hydrogeological maps which use as a basis, a compiled 1:250 000 scale geology layer (derived from 1:250 000, 1:500 000, 1:63 360 scale geological maps together with some areas where only reconnaissance mapping is available). These 1:100 000 scale maps are easier to read and use the regional groundwater prospectivity boundaries from the 1:250 000 scale maps as background information in the absence of more detailed hydrogeological coverage across the whole State. They should be used in conjunction with the 1:250 000 scale maps and other more detailed hydrogeological maps and site specific reports, if available, as a preliminary to more intensive groundwater studies in a particular area. If additional projects are undertaken in targeted priority areas of the State, these maps can be further developed and made more site specific.


Boreholes shown on the map are those with locations mostly supplied by drillers and from location in the field by MRT staff. There are many open bores installed for investigation and production purposes in coastal areas in Tasmania that may not be shown on these maps at this stage. Boreholes with yields <0.01 L/s have been considered for successful bores. Outputs of bores are those supplied by drillers and are mostly the result of short term pumping measurements. Some bores have been successful but outputs have not been reported. Boreholes reported as dry holes usually have a small unexpected yield (<0.01 L/s).

Small elevated areas of any hydrogeological unit will usually have lower prospectivity because of limited storage and high drainage rates. In areas where there is little or no water bore data (e.g. Southern Tasmania), the groundwater prospectivity has been assumed to be similar to that in the areas where data are widely available. In areas of low rainfall, water quality can be poorer and water usage may be limited.

These maps provide some additional information to the 1:250 000 scale hydrogeological maps in that there are some subdivisions of Permian and Triassic age units. There is some difference in hydrogeological properties and prospectivity between these units. For example the Upper Triassic (Tasmanian sandstone, mudstone and coal measures) has lower prospectivity and poorer quality groundwater than the Lower Triassic and Permian rocks in most locations.

There is usually a degree of vertical stratification in the groundwater quality within the aquifers and results presented represent a composite value of salinity from drill holes at a particular site. Natural groundwater quality is influenced by ground level and the evaporation (e.g. high rainfall, low evaporation areas tend to have better quality groundwater) from low rainfall, high evaporation areas. The composition of the bore water through which the groundwater passes and a range of physical and chemical properties of the rocks that it permeates also influence salinity. Human activities such as extensive groundwater pumping, pollution from various waste disposal activities and use of chemicals (agriculture, forestry, industry etc.) also may have negative effects on groundwater quality.

The geology (including aquifer prospectivity), groundwater quality and the relationship between surface water, groundwater and rainfall is a particularly area of important consideration in resource and other groundwater-related water studies. The attached average rainfall map can be used to make general deductions about the possible link between the above-ground water surface. Climate has an indirect effect on the quality of groundwater. At least two elements and spring water is largely. First all groundwater derived under most conditions. Areas with unconfined shallow aquifers groundwater pumping near the rivers may result in the reverse water flow from the river towards the groundwater and result in decreased river flow. These maps provide preliminary information for more detailed groundwater and surface water studies.

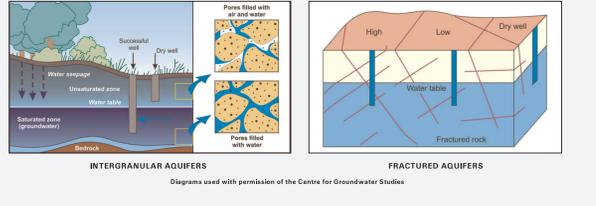

AQUIFER TYPE	PROSPECTIVITY (After de Wit)	ROCK GROUPS	VULNERABILITY TO POLLUTION
POROUS (INTERGRANULAR)	HIGH	Quaternary aeolian deposits marginal to the coast consisting of fine to medium grain size sand.	High.
POROUS (INTERGRANULAR)	MODERATE-HIGH	Quaternary coastal plain deposits consisting of sand, clay and silt, and gravel and sandstone and gravel underlying areas near the coast.	Moderate to high, depends on permeability of the material that overlies the aquifer.
POROUS (INTERGRANULAR)	LOW-MODERATE	Quaternary alluvium (clay, sand and gravel with varying clay content) and later (fluvial) deposits. Sand, gravel and mud of alluvial, lacustrine and fluvial origin. Minor windblown sands on sloping bedrock.	Low to high. Low where clay material overlies aquifer. High where there is no clay.
POROUS (INTERGRANULAR)	LOW-HIGH	Tertiary sandstone, clay, sand and gravel of non-marine origin (lacustrine alluvial deposits). Minor interstratified (fluvial) origin). Variable thickness up to several hundred metres.	Low to high. Low where clay overlies aquifers. High where gravel aquifers come to the surface.
FRAGMENTED ROCK (FRAGMENTARY or some horizons)	HIGH	Triassic, quartzite and lithic sandstones, mudstone, minor coal. Tertiary origin (R. N. F.).	High unless a layer of low permeability material overlies the aquifer.
FRAGMENTED ROCK	MODERATE-HIGH	Permian mudstone, siltstone and sandstone (often pebbly), minor limestone, conglomerate and siltite. Many narrow origin (P).	Very high unless a layer of low permeability material overlies the aquifer.
FRAGMENTED ROCK	HIGH	Ordovician to Devonian turbidite sequence of sandstone and mudstone (Murray Subgroup). Ordovician limestone, Cambrian volcanics and sediments. Proterozoic mudstone, slate, quartzite and dolomite. Neoproterozoic sandstone.	High. Very occasionally deep clay soils may offer some protection and lower vulnerability.
FRAGMENTED ROCK	MODERATE	Tertiary basalt.	Moderate. Can be high if fractured zones are not covered by clay.
FRAGMENTED ROCK	LOW	Jurassic dolomite. Devonian to Permian. Tertiary basalt - Scottsdale, Ringarooma, Tamar and Devon.	Low to moderate. Can be high if highly fractured zones are not covered by clay.
FRAGMENTED ROCK	LOW-MODERATE (NE)	Many Low Mod. (NE)	

GROUNDWATER FEATURE

Feature type — Yield and accuracy

Yield and accuracy — Contour, TDS

GROUNDWATER FEATURE TYPE AND ACCURACY

- Borehole location accuracy: 1-500 metres, 500-2000 metres, 500-3000 metres, Well, dog well location accuracy 500-2000 metres.
- Borehole location accuracy: 500-2000 metres, 500-3000 metres, Well, dog well location accuracy 500-2000 metres.

BOREHOLE YIELD

Litres / second Potential usage of groundwater based on borehole yield

- Unknown
- 0 (Dry)
- < 0.05: Limited use for domestic and stock
- 0.05 - 0.5: Domestic, stock, garden
- 0.5 - 1.5: Domestic, stock, garden, limited irrigation
- 1.5 - 5.0: Domestic, stock, garden, moderate area irrigation
- 5.0 - 10.0: Domestic, stock, garden, large area irrigation, small towns, supplement to larger towns.
- > 10.0: Domestic, stock, garden, large area irrigation, small towns, supplement to larger towns.

Outputs of bores are those supplied by drillers and are mostly the result of short term pumping measurements. Outputs may not be suitable for long periods of continuous pumping. Boreholes reported as dry holes usually have small unreported yields up to 0.01 L/s. See bores shown on these maps in the Mineral Resources Tasmania groundwater database. BORIS data as at 18-SEP-2006

CONVERSION FACTORS

1 litre per second = 800 gallons per hour = 8.6 millimetres per hectare per day = 1.9 millimetres per acre per day

SALINITY - TDS

Milligrams / litre

- Unknown
- < 300
- 300 - 1000
- 1000 - 5000
- 5000 - 3000
- 3000 - 7000
- > 7000

POTENTIOMETRIC CONTOURS

- 10 m contour interval: Potentiometric contours of deeper Tertiary Aquifers (5 m contour interval)
- 10 m contour interval: Potentiometric surface contours (10 m contour interval)
- 10 m contour interval: Great Forester River Catchment (NE Tasmania)
- 10 m contour interval: Potentiometric surface contours in Tertiary basalt (10 m contour interval)
- 10 m contour interval: Great Forester River Catchment (NE Tasmania)
- Tertiary age deep lead - position approximate Great Forester River Catchment (NE Tasmania)

SALINITY CONTOURS

- 500 mg/L contour interval: Salinity contours of deeper Tertiary Aquifers (500 mg/L contour interval)
- Longford Area (Geological Bulletin 59)

MEAN ANNUAL RAINFALL

Scale: 1:100000
AGD86 - AMG Zone 55
Contour interval: 100 metres

GROUNDWATER QUALITY Expressed as Total Dissolved Solids (TDS)

TDS in mg/L

- < 500: All purposes, domestic and irrigation
- 500 - 1000: Most purposes, upper limit for drinking, limited irrigation
- 1000 - 1500: Most purposes, upper limit for drinking, limited irrigation
- 1500 - 3000: All livestock, very limited irrigation
- 3000 - 7000: Most livestock (not pigs or horses)
- > 7000: Limited stock use (beef cattle, sheep)

Areas of similar groundwater quality across different rock types are shown by shading as above. Solid lines indicate deep aquifers while broken lines - - - - - indicate shallow aquifers. Boundaries are approximate only.

These are general limits for the use of groundwater. The use of water for irrigation with the higher levels of salinity in the above table should only be considered on particularly suitable soil types with the adoption of specific management practices, or if the bore water is mixed with fresh water. For further information see Australian and New Zealand guidelines for fresh and marine water quality.

This data for the map was derived from the Tasmanian Geological Atlas 1:250,000 digital series and Mineral Resources Tasmania. Groundwater data base (BORIS) and are based upon the potential for groundwater within on-land rock groups.

Other groundwater and hydrological maps and reports are available from Mineral Resources Tasmania. Borehole data is available from the Mineral Resources Tasmania web site - www.mrta.tas.gov.au

While every care has been taken in the preparation of this data, the Tasmanian Geological Survey does not accept any liability for any loss or damage arising from the use of this data. The Tasmanian Geological Survey does not accept any liability for any loss or damage arising from the use of this data. The Tasmanian Geological Survey does not accept any liability for any loss or damage arising from the use of this data.

Map first published July 2006
Base data from the LIST - State of Tasmania

Mineral Resources Tasmania
MUNICIPAL PLANNING INFORMATION SERIES
MAP 16