OR-0282

ENCLOSURE 14

Schlumberger

LDL-CNL-GR 1/500 DATA TRANS.

CSU Field Log

COMPANY: BRIDGE OIL LTD

WELL: SEAL #1

FIELD: WILDCAT
RIG : MARGIE
STATE: TASMANIA
NATION: AUSTRALIA
LOCATION: BASS STRAIT E.P. T-19-P

LATITUDE: 039 21 49.2 S
LONGITUDE: 144 52 51.5 E

PERMANENT DATUM: MSL
ELEV. OF PERM. DATUM: 0.0 M
LOG MEASURED FROM: KB
25.3 M ABOVE PERM. DATUM
DRLG. MEASURED FROM: KB

ELEVATIONS-
KB: 25.3 M
DF: 25.0 M
GL: -64.6 M

DATE: 20 FEB 86
RUN NO: 1

OTHER SERVICES-
DIL-LSS-MSFL
CST-GR

PROGRAM
TAPE NO:
28.4
SERVICE
ORDER NO:
MGE86-04

DEPTH-DRILLER:	1670.0 M		
DEPTH-LOGGER:	1670.0 M		
BTM. LOG INTERVAL:	1669.0 M		
TOP LOG INTERVAL:	644.0 M		
CASING-DRILLER:	232.0 M	652.0 M	
CASING-LOGGER:	232.0 M	652.0 M	
CASING:	20 "	13 3/8 "	
WEIGHT:	94.0000 LB/F	64.0000 LB/F	
BIT SIZE:	26 "	17 1/2 "	12 1/4 "
DEPTH:	261.0 M	656.0 M	1670.0 M

TYPE FLUID IN HOLE: LIGNOSULFONATE/DEXTRID
DENSITY: 9.80 LB/G
VISCOSITY: 44.0 S
PH: 9.5
FLUID LOSS: 5.0 C3
SOURCE OF SAMPLE: MUDPIT
RM: .492 OHMM AT 60.8 DEGF
RMF: .395 OHMM AT 59.0 DEGF
RMC: .628 OHMM AT 55.4 DEGF
SOURCE RMF/RMC: PRESS /PRESS
RM AT BHT: .193 OHMM AT 166. DEGF
RMF AT BHT: .151 OHMM AT 166. DEGF
RMC AT BHT: .227 OHMM AT 166. DEGF

TIME CIRC. STOPPED: 23:50 (19/2)
TIME LOGGER ON BTM.: 09:35 (20/2)

MAX. REC. TEMP: 165.9 DEGF

LOGGING UNIT NO: 390
LOGGING UNIT LOC: VEA
RECORDED BY: I. CHANDRA / T. BROPHY
WITNESSED BY: M. HANZALIK / D. BROOKMAN

REMARKS:

LDT-LOG RECORDED IN SANDSTONE MATRIX
BARITE CONTAINED IN MUD : 2.72 %

EQUIPMENT NUMBERS-

SGC-JC 3374	NSC-C 736	PGD-G 1877	DRS-B 3871
CNC-A 2173	NSM-A 2794	GSR-J 6923	CNB-AB 578

ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATIONS, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFUL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

CP 28.4 FILE 103 20-FEB-86 00:22
DATA ACQUIRED 20-FEB-86 11:19

EVENT MARK SUMMARY:

OUTPUT	INTERVAL BETWEEN PIPS	DEPTH TRACK EDGE
IHV	.100000 M3	LEFT EDGE

5 cm

```
                                            DRHO(G/C3)
                                        -.2500          .25000
     BS  (IN  )                       PEF
10.000          20.000   0.0                            10.000
     CALI(IN  )                       NPHI
10.000          20.000   .45000                         -.1500
     GR  (GAPI)                       RHOB(G/C3)
0.0             200.00   1.9000                         2.9000
```

CP 28.4 FILE 103 20-FEB-86 00:20
DATA ACQUIRED 20-FEB-86 11:19

CP 28.4 FILE 103 20-FEB-86 00:16
DATA ACQUIRED 20-FEB-86 09:32

```
                                            DRHO(G/C3)
                                        -.2500          .25000
     BS  (IN  )                       PEF
10.000          20.000   0.0                            10.000
     CALI(IN  )                       NPHI
10.000          20.000   .45000                         -.1500
     GR  (GAPI)                       RHOB(G/C3)
0.0             200.00   1.9000                         2.9000
```

SENSOR MEASURE POINT TO TOOL ZERO

FCNL	7.24 METER	GR	9.83 METER
CALI	.81 METER	NCNL	7.24 METER
NRAT	7.24 METER	TENS	-.28 METER
TLS	.64 METER	TSS	.64 METER
FLS	.64 METER	FSS	.64 METER
PARI	.64 METER	SEQ	.64 METER
LS	.79 METER	LU	.79 METER
SS1	.64 METER	SS2	.64 METER
LU2	.79 METER	LITH	.79 METER
LL	.79 METER	LU1	.79 METER

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
HC	CALI		PSNR	2.25100	
FD	1.00000	G/C3	MATR	SAND	
WMUD	9.80000	LB/G	MDEN	2.65000	G/C3
DHC	CALI		BFM	LIQU	
BS	12.2500	IN	BHS	OPEN	
PP	NORM		DO	0.0	M

TAPE NOT MADE

EVENT MARK SUMMARY:

OUTPUT	INTERVAL BETWEEN PIPS	DEPTH TRACK EDGE
IHV	.100000 M3	LEFT EDGE

```
                                            DRHO(G/C3)
                                        -.2500          .25000
     BS  (IN  )                       PEF
10.000          20.000   0.0                            10.000
     CALI(IN  )                       NPHI
10.000          20.000   .45000                         -.1500
     GR  (GAPI)                       RHOB(G/C3)
0.0             200.00   1.9000                         2.9000
```

CP 28.4 FILE 102 20-FEB-86 00:15
DATA ACQUIRED 20-FEB-86 09:22

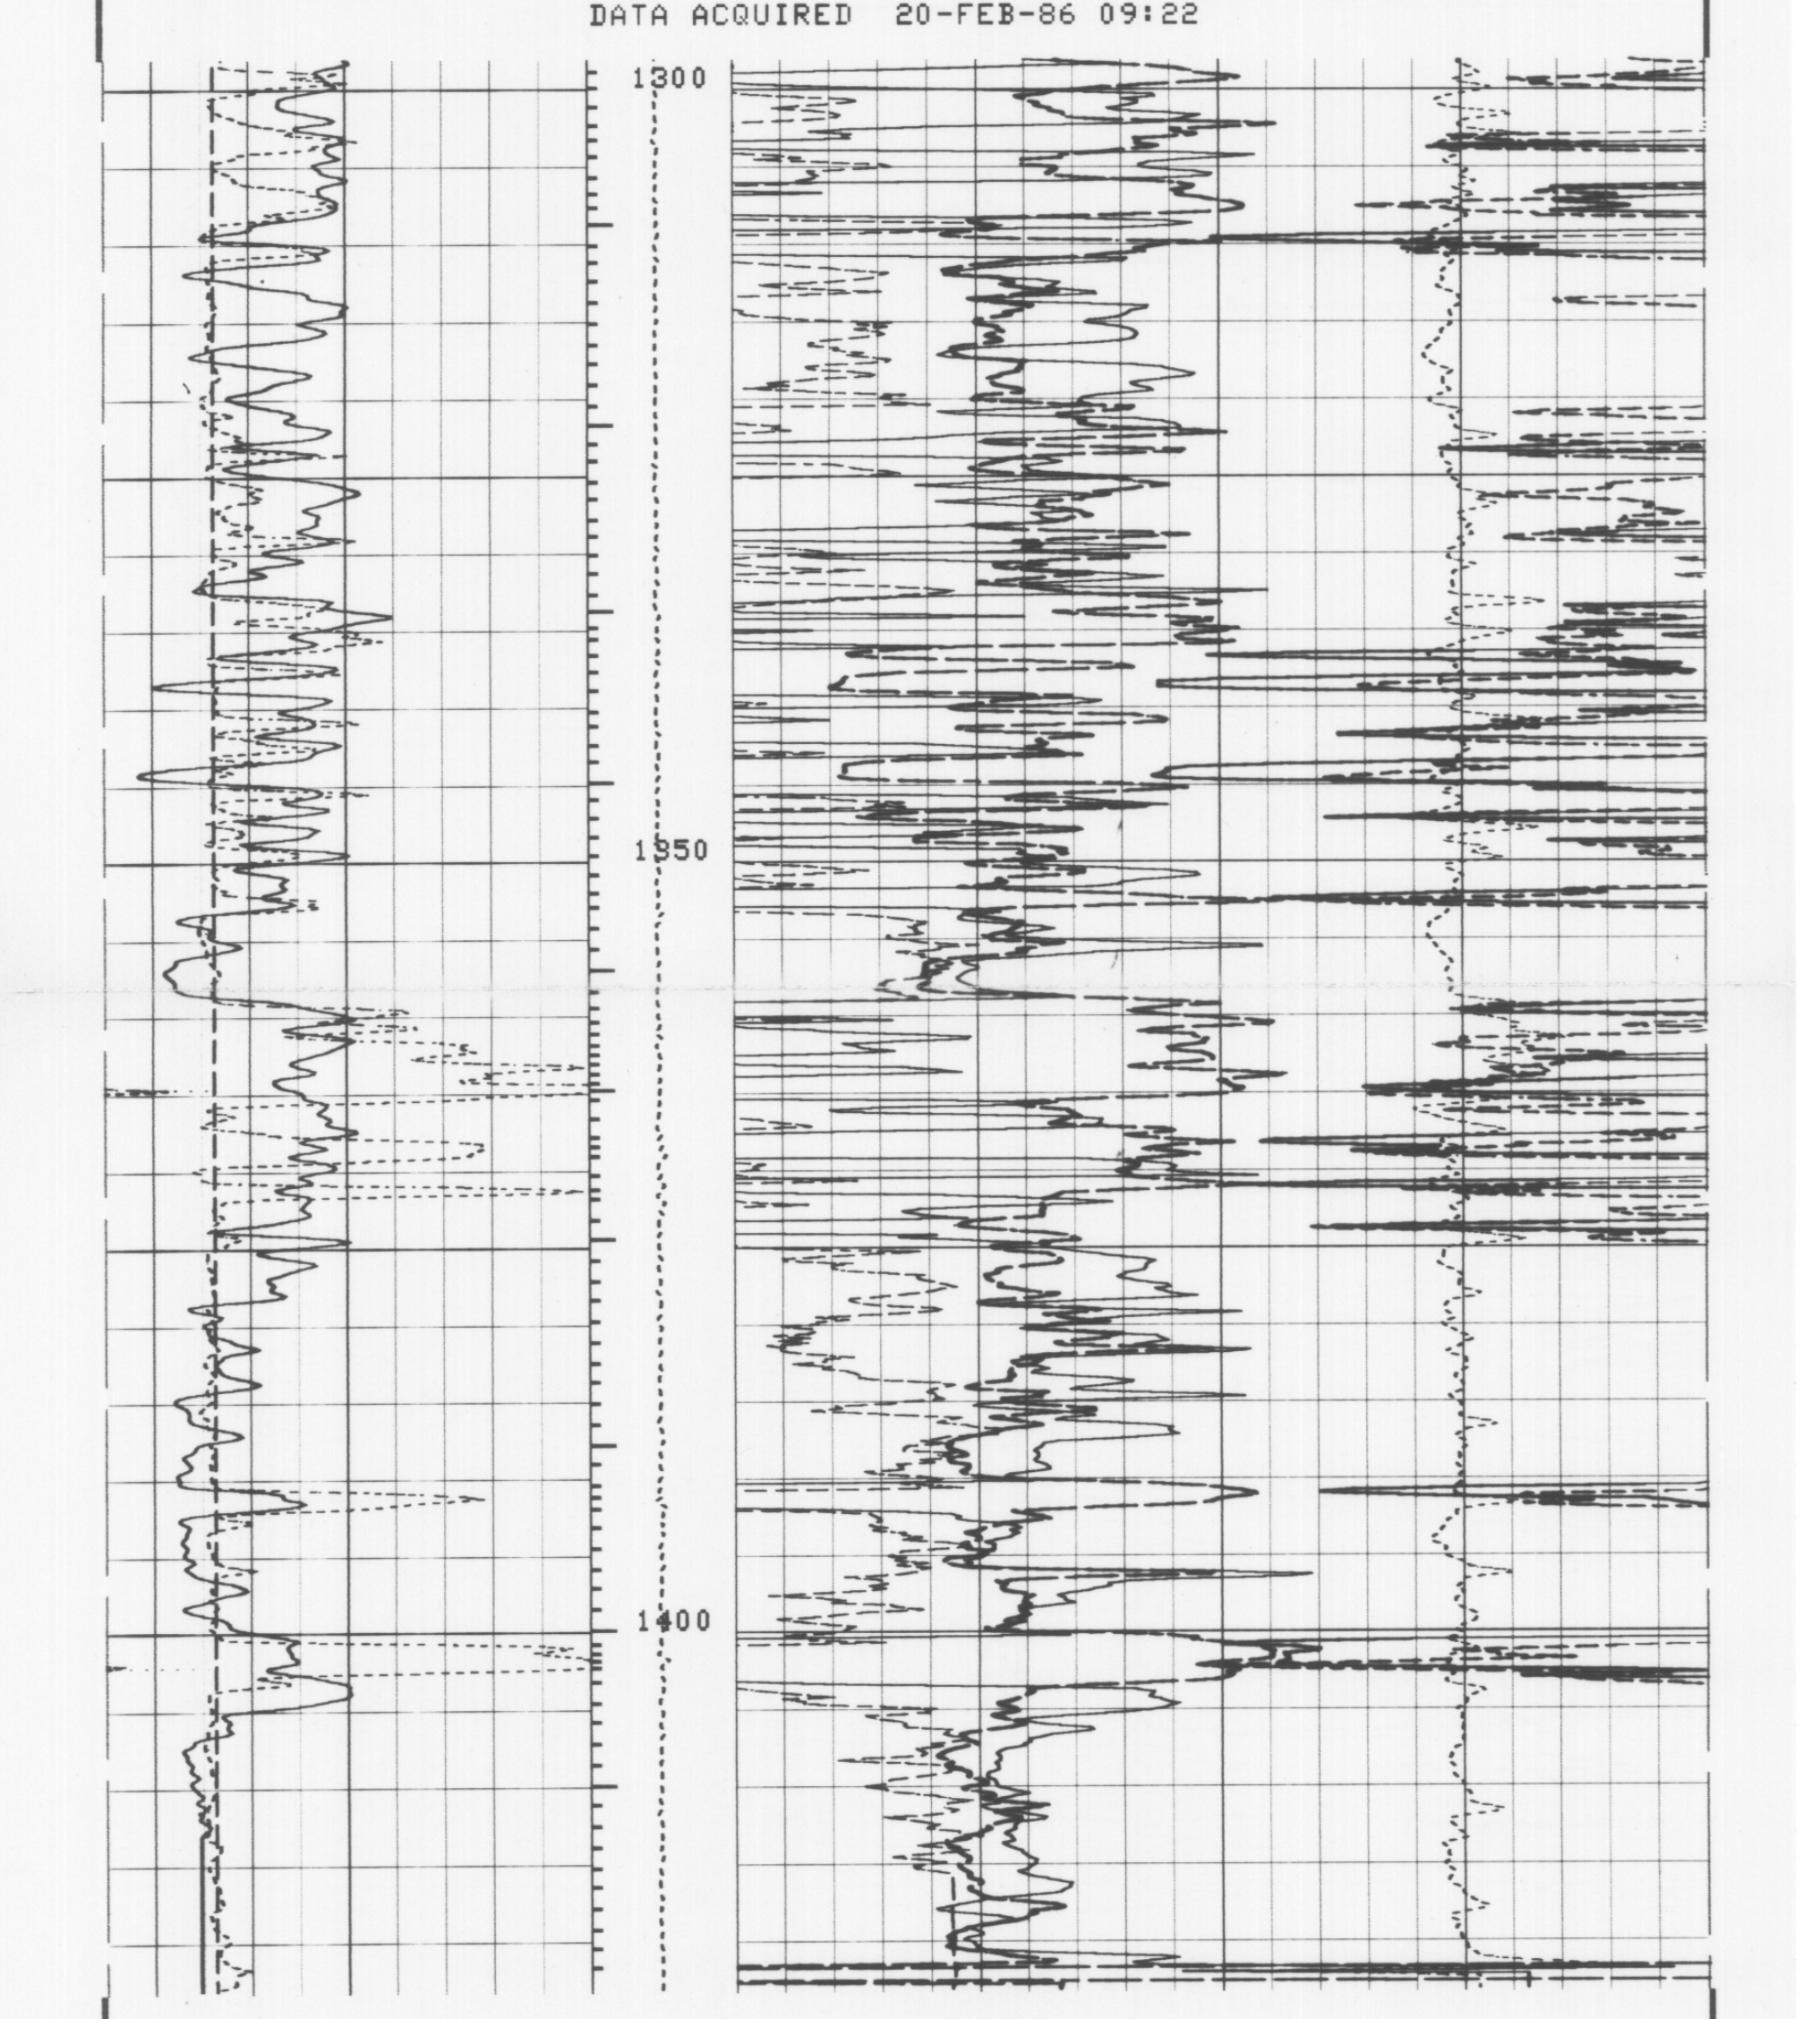

CP 28.4 FILE 102 20-FEB-86 00:15
DATA ACQUIRED 20-FEB-86 09:09

```
                                            DRHO(G/C3)
                                        -.2500          .25000
     BS  (IN  )                       PEF
10.000          20.000   0.0                            10.000
     CALI(IN  )                       NPHI
10.000          20.000   .45000                         -.1500
     GR  (GAPI)                       RHOB(G/C3)
0.0             200.00   1.9000                         2.9000
```

SENSOR MEASURE POINT TO TOOL ZERO

FCNL	7.24 METER	GR	9.83 METER
CALI	.81 METER	NCNL	7.24 METER
NRAT	7.24 METER	TENS	-.28 METER
TLS	.64 METER	TSS	.64 METER
FLS	.64 METER	FSS	.64 METER
PARI	.64 METER	SEQ	.64 METER
LS	.79 METER	LU	.79 METER
SS1	.64 METER	SS2	.64 METER
LU2	.79 METER	LITH	.79 METER
LL	.79 METER	LU1	.79 METER

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
HC	CALI		PSNR	2.25100	
FD	1.00000	G/C3	MATR	SAND	
WMUD	9.80000	LB/G	MDEN	2.65000	G/C3
DHC	CALI		BFM	LIQU	
BS	12.2500	IN	BHS	OPEN	
PP	NORM		DO	0.0	M

TAPE NOT MADE

Schlumberger

LDL-CNL-GR 1/500 DATA TRANS.

CSU Field Log

5 cm