OR-0282

ENCLOSURE 16.

Schlumberger

DIL-MSFL-LSS-GR 1/500 DATA TRANS.

CSU Field Log

```
COMPANY:     BRIDGE OIL LTD

WELL:        SEAL #1

FIELD:       WILDCAT
RIG   :      MARGIE
STATE:       TASMANIA
NATION:      AUSTRALIA
LOCATION:    BASS STRAIT E.P. T-19-P.


LATITUDE:    039 21 49.2 S
LONGITUDE:   144 52 51.5 E

PERMANENT DATUM:        MSL            ELEVATIONS-
ELEV. OF PERM. DATUM:     0.0 M          KB:   25.3 M
LOG MEASURED FROM:      KB               DF:   25.0 M
    25.3 M    ABOVE PERM. DATUM          GL:  -64.6 M
DRLG. MEASURED FROM:    KB


DATE:            20 FEB 86
RUN NO:          2
```

```
OTHER SERVICES-
  LDL-CNL-GR
  CST-GR

PROGRAM
TAPE NO:
  28.4
SERVICE
ORDER NO:
  MGE86-04
```

```
DEPTH-DRILLER:        1670.0 M
DEPTH-LOGGER:         1670.0 M
BTM. LOG INTERVAL:    1668.5 M
TOP LOG INTERVAL:      644.0 M

CASING-DRILLER:        232.0 M       642.0 M
CASING-LOGGER:         232.0 M       644.0 M
CASING:              20 "          13 3/8 "
   WEIGHT:           94.0000 LB/F 68.0000 LB/F
BIT SIZE:            26 "          17 1/2 "      12 1/4 "
   DEPTH:              261.0 M       656.0 M      1670.0 M
```

-

```
TYPE FLUID IN HOLE:    LIGNOSULFONATE/DEXTRID
DENSITY:                9.80 LB/G
VISCOSITY:             44.0 S
PH:                     9.5
FLUID LOSS:             5.0 C3
SOURCE OF SAMPLE:      MUDPIT
RM:                      .492 OHMM AT 16.0 DEGC
RMF:                     .395 OHMM AT 15.0 DEGC
RMC:                     .628 OHMM AT 13.0 DEGC
SOURCE RMF/RMC:        PRESS /PRESS
RM AT BHT:               .206 OHMM AT 68.3 DEGC
RMF AT BHT:              .161 OHMM AT 68.3 DEGC
RMC AT BHT:              .242 OHMM AT 68.3 DEGC

TIME CIRC. STOPPED:    23:50 (19/2)
TIME LOGGER ON BTM.:   05:30 (20/2)

MAX. REC. TEMP:         68.3 DEGC

LOGGING UNIT NO:        390
LOGGING UNIT LOC:      VEA
RECORDED BY:           I. CHANDRA / T. BROPHY
WITNESSED BY:          M. HANZALIK / D. BROOKMAN
```

REMARKS:

5 cm

TOOL STRING RUN ECCENTRALIZED
1 1/2" STAND OFF USED ON DITD
SONIC SKIPPING IS DUE TO ROUGH HOLE CONDITIONS.
THERMOMETER READINGS : 155 DEGF AND 155 DEGF.

EQUIPMENT NUMBERS-

```
SGC-JC 3374      SLC-KB 1908      SLS-SC 203       SLM-DA 835
DIC-DA 1435      DIS-EC 1471      IEM-BE 1759      NSM-A 2794
SRE-CB 1715      DRS-C 3714
```

ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATIONS, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFUL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

```
CP 28.4            FILE  102       21-    -14 00:27
                   DATA ACQUIRED  20-FEB-86 07:21
```

```
EVENT MARK SUMMARY:

OUTPUT  INTERVAL        DEPTH TRACK
        BETWEEN PIPS    EDGE

IHV     .100000 M3      LEFT EDGE
ITT     .00100000 S     RIGHT EDGE
```

```
                          ILD (OHMM)
                     200.00         20000.
                          SFLU(OHMM)
                     200.00         20000.
      BS  (IN  )          MSFL(OHMM)
10.000        20.000 200.00         20000.
      CALI(IN  )          ILD (OHMM)
10.000        20.000 .20000         200.00
      GR  (GAPI)          MSFL(OHMM)            DT  (US/F)
0.0           200.00 .20000         200.00 140.00         40.000
      SP  (MV  )          SFLU(OHMM)            DTL (US/F)
-80.00        20.000 .20000         200.00 140.00         40.000
```

```
CP 28.4            FILE  102       21-    -14 00:27
                   DATA ACQUIRED  20-FEB-86 07:21
```

```
CP 28.4            FILE  102       21-    -14 00:21
                   DATA ACQUIRED  20-FEB-86 05:29
```

```
                          ILD (OHMM)
                     200.00         20000.
                          SFLU(OHMM)
                     200.00         20000.
      BS  (IN  )          MSFL(OHMM)
10.000        20.000 200.00         20000.
      CALI(IN  )          ILD (OHMM)
10.000        20.000 .20000         200.00
      GR  (GAPI)          MSFL(OHMM)            DT  (US/F)
0.0           200.00 .20000         200.00 140.00         40.000
      SP  (MV  )          SFLU(OHMM)            DTL (US/F)
-80.00        20.000 .20000         200.00 140.00         40.000
```

SENSOR MEASURE POINT TO TOOL ZERO

```
SRAT 20.40 METER           AMPL 18.87 METER
TT1  19.18 METER           CBL  18.87 METER
TT3  18.87 METER           TT2  18.87 METER
TO   18.87 METER           TT4  18.57 METER
SLTT 18.87 METER           TT   18.87 METER
GR   15.16 METER           SCBL 18.87 METER
ILD   8.00 METER           CALI   .89 METER
SFL   7.09 METER           ILM   6.88 METER
SPAR  5.89 METER           SP    5.89 METER
I1     .86 METER           TENS   .76 METER
NOIS   .76 METER           CMSF   .79 METER
```

PARAMETERS

```
NAME  VALUE       UNIT            NAME  VALUE       UNIT

CDTS 100.000                      SPFS R-H
DTF  189.000      US/F            DTM  56.0000      US/F
SPS  DT                           ITTS DT
DSIN 5            US              DDEL 200          US
WMUD 9.80000      LB/G            DWCO 512
SBR  1.00000      OHMM            DSEC 6.90000      MMHO
SPT  STAN                         MSEC 7.00000      MMHO
BS   12.2500      IN              BHS  OPEN
PP   NORM                         DO   0.0          M
```

TAPE NOT MADE

```
EVENT MARK SUMMARY:

OUTPUT  INTERVAL        DEPTH TRACK
        BETWEEN PIPS    EDGE

IHV     .100000 M3      LEFT EDGE
ITT     .00100000 S     RIGHT EDGE
```

```
                          ILD (OHMM)
                     200.00         20000.
                          SFLU(OHMM)
                     200.00         20000.
      BS  (IN  )          MSFL(OHMM)
10.000        20.000 200.00         20000.
      CALI(IN  )          ILD (OHMM)
10.000        20.000 .20000         200.00
      GR  (GAPI)          MSFL(OHMM)            DT  (US/F)
0.0           200.00 .20000         200.00 140.00         40.000
      SP  (MV  )          SFLU(OHMM)            DTL (US/F)
-80.00        20.000 .20000         200.00 140.00         40.000
```

```
CP 28.4            FILE  101       21-    -14 00:20
                   DATA ACQUIRED  20-FEB-86 05:22
```

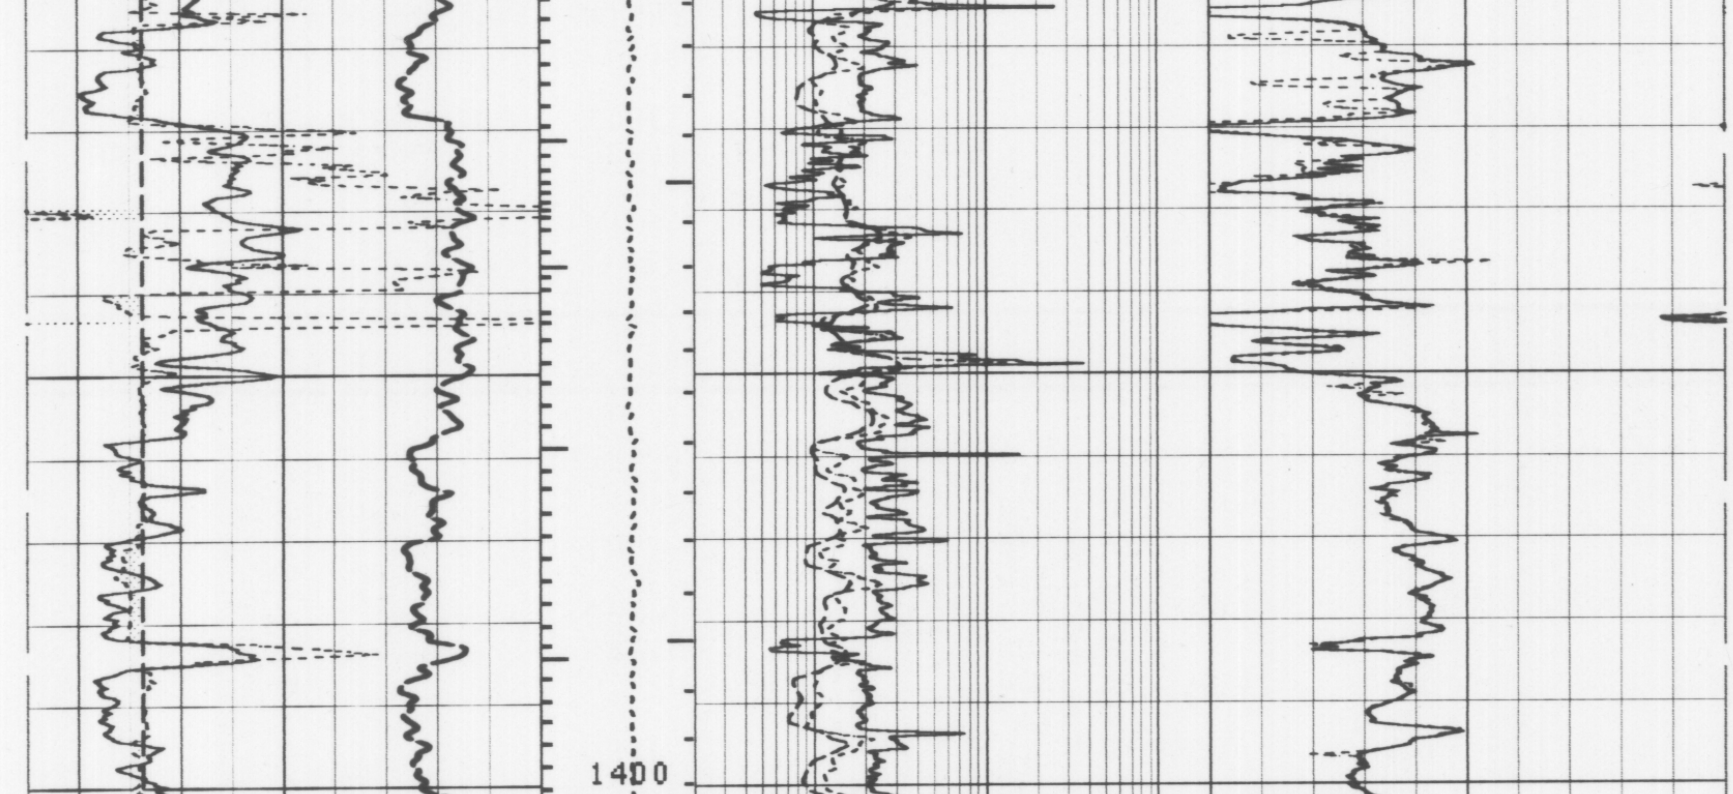

```
CP 28.4            FILE  101       21-    -14 00:19
                   DATA ACQUIRED  20-FEB-86 05:11
```

```
                          ILD (OHMM)
                     200.00         20000.
                          SFLU(OHMM)
                     200.00         20000.
      BS  (IN  )          MSFL(OHMM)
10.000        20.000 200.00         20000.
      CALI(IN  )          ILD (OHMM)
10.000        20.000 .20000         200.00
      GR  (GAPI)          MSFL(OHMM)            DT  (US/F)
0.0           200.00 .20000         200.00 140.00         40.000
      SP  (MV  )          SFLU(OHMM)            DTL (US/F)
-80.00        20.000 .20000         200.00 140.00         40.000
```

SENSOR MEASURE POINT TO TOOL ZERO

```
SRAT 20.40 METER           AMPL 18.87 METER
TT1  19.18 METER           CBL  18.87 METER
TT3  18.87 METER           TT2  18.87 METER
TO   18.87 METER           TT4  18.57 METER
SLTT 18.87 METER           TT   18.87 METER
GR   15.16 METER           SCBL 18.87 METER
ILD   8.00 METER           CALI   .89 METER
SFL   7.09 METER           ILM   6.88 METER
SPAR  5.89 METER           SP    5.89 METER
I1     .86 METER           TENS   .76 METER
NOIS   .76 METER           CMSF   .79 METER
```

PARAMETERS

```
NAME  VALUE       UNIT            NAME  VALUE       UNIT

CDTS 100.000                      SPFS R-H
DTF  189.000      US/F            DTM  56.0000      US/F
SPS  DT                           ITTS DT
DSIN 5            US              DDEL 200          US
WMUD 9.80000      LB/G            DWCO 512
SBR  1.00000      OHMM            DSEC 6.90000      MMHO
SPT  STAN                         MSEC 7.00000      MMHO
BS   12.2500      IN              BHS  OPEN
PP   NORM                         DO   0.0          M
```

TAPE NOT MADE

Schlumberger

DIL-MSFL-LSS-GR 1/500 DATA TRANS.

CSU Field Log

5 cm