

COMPANY: AMOCO AUSTRALIA PETROLEUM CO.
 WELL: TILANA 01
 FIELD: HILDECAT M EPOC
 SLUR: TASMANIA
 LOCATION: AUSTRALIA
 NAME: 871-4-20
 LATITUDE: 43 29 38.94 S
 LONGITUDE: 149 29 48.12 E
 PERMANENT DATUM: MSL
 LOG MEASURED ABOVE PERM DATUM: KB
 DRUG. MEASURED FROM: KB
 DATE RUN: 29 OCT 85
 DEPTH-DRILLER: 3900.3 M
 DEPTH-LOGGER: 3902.1 M
 BIT LOG INTERVAL: 3400.0 M
 CASING-DRILLER: 413.0 M
 CASING-LOGGER: 413.0 M
 CHS HEIGHT: 183,000 LB/F
 BIT SIZE: 12 1/2 IN.
 DEPTH: 413.0 M

OTHER SERVICES:
 LSTF-MSL-BHC
 LDT-CNTM-DR
 CST-DR
 MFT-HP-GR

TYPE FLUID IN HOLE: F/WATER-GEL-POLYMER
 DENSITY: 9.90 LB/FG
 VISCOSITY: 47.0 S
 PHI: 11.6
 FLUID LOSS: 5.0 CC
 SOURCE OF SAMPLE: FLOWLINE
 RM: .357 DHMM AT 95.0 DEGF
 RMF: .309 DHMM AT 72.0 DEGF
 RMC: .760 DHMM AT 70.0 DEGF
 SOURCE RMF/RMC: PRESS /PRESS
 RM AT BHT: .147 DHMM AT 240. DEGF
 RMF AT BHT: .099 DHMM AT 240. DEGF
 RMC AT BHT: .237 DHMM AT 240. DEGF

TIME CIRC. STOPPED: 1615/28
 TIME LOGGER ON STR.: 1650/29

MAX. REC. TEMP: 240.0 DEGF

LOGGING UNIT NO: 022
 LOGGING UNIT LOC: VEA
 RECORDED BY: R.WINSLOE
 WITNESSED BY: C.E.KONEN


REMARKS:
 4 PAD ALGORITHM USED.
 MAX DIP COMPUTED 70 DEGREES.

EQUIPMENT NUMBERS-
 HDS-F 2343 HDH-LB 856 DAM-A 1769 DAN-AC 3909
 HDE-F

ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCE FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATIONS, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFUL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

CP 28.2 FILE 0 31-OCT-85 12:14
 DATA ACQUIRED 29-OCT-85 17:40

C/S (IN) 0.0 20.000
 C/S (IN) 0.0 20.000

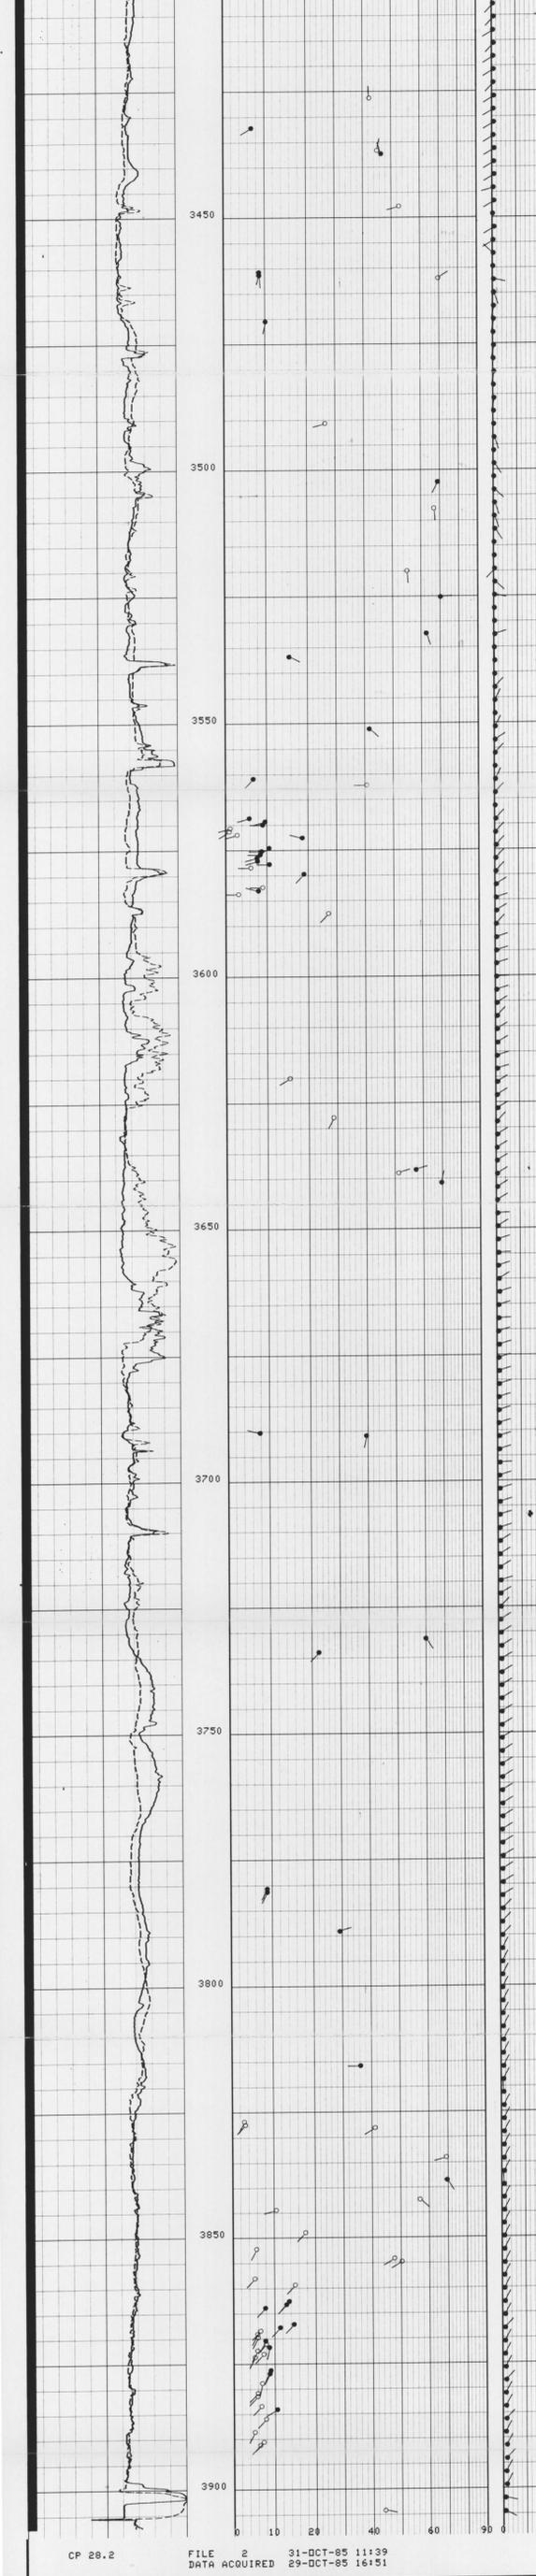


C/S (IN) 0.0 20.000
 C/S (IN) 0.0 20.000

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
MODE	4/2		TDCR	4PAD	
DSCA	40	DEG	DMAX	70	DEG
MCT	72		MDEC	13	DEG
BHS	OPEN		STYP	HDSF	
DD	0.0	M	BS	12.2500	IN
PP	RECD				

TAPE NOT MADE

C/S (IN) 0.0 20.000
 C/S (IN) 0.0 20.000

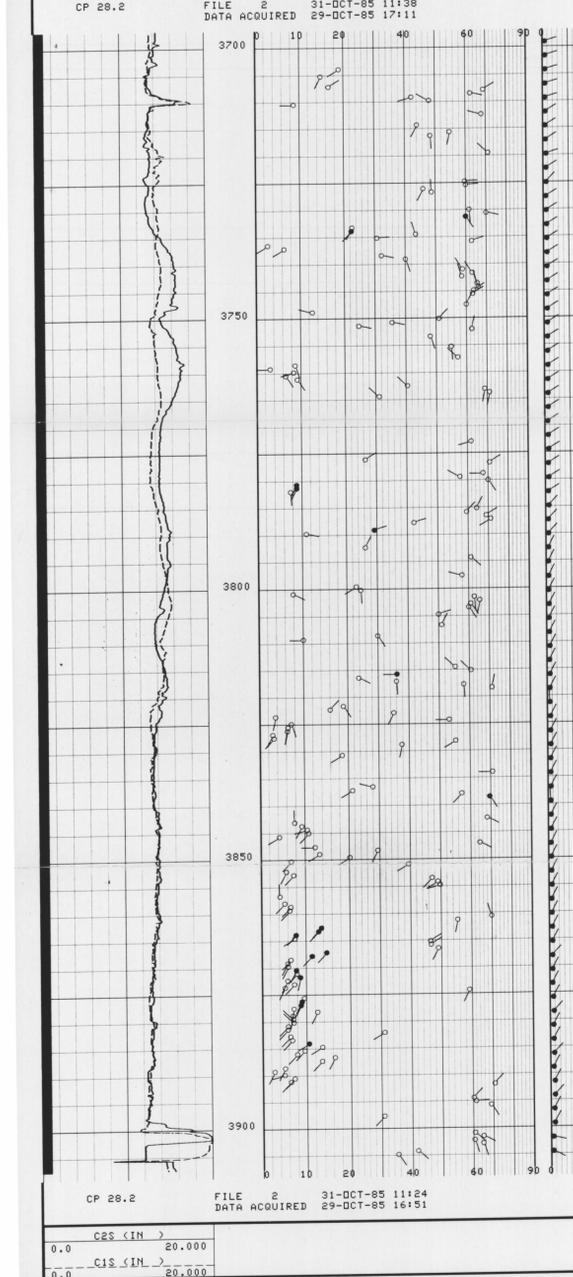

C/S (IN) 0.0 20.000
 C/S (IN) 0.0 20.000

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
MODE	4/2		TDCR	3PAD	
DSCA	40	DEG	DMAX	70	DEG
MCT	72		MDEC	13	DEG
BHS	OPEN		STYP	HDSF	
DD	0.0	M	BS	12.2500	IN
PP	RECD				

TAPE NOT MADE

C/S (IN) 0.0 20.000
 C/S (IN) 0.0 20.000

CVBERDIP TILANA 01 3902M.-3400M.