

COMPANY: AMOCO AUSTRALIA PETROLEUM CO. 32000S
 WELL: TILANA #1
 FIELD: WILDCAT
 RIG: DIAMOND H EPDC
 SLAB: TASMANIA
 NATION: AUSTRALIA
 LOCATION: SHOT POINT 5199 ,
 LINE 871-A-50
 LATITUDE: 039 53'36.96"S
 LONGITUDE: 145 58'42.2" E
 PERMANENT DATUM: MSL
 ELEVATIONS-
 ELEV. OF PERM. DATUM: KB: 22.3 M
 LOG MEASURED FROM: KB DF: 22.0 M
 22.3 M ABOVE PERM. DATUM GL: -79.9 M
 DRLG. MEASURED FROM: KB

OTHER SERVICES-
 LDL-CNL-GR
 HDT
 ISF-DBHC-
 MSFL-GR
 HST

PROGRAM
 TAPE NO:
 28.2
 SERVICE
 ORDER NO:
 DNE851001

DATE: 11 OCT 85
 RUN NO: 1

DEPTH-DRILLER: 3066.0 M
 DEPTH-LOGGER: 3070.0 M
 BTM. LOG INTERVAL: 3065.0 M
 TOP LOG INTERVAL: 1691.0 M

CASING-DRILLER: 413.0 M 1651.0 M
 CASING-LOGGER: 413.0 M 1651.5 M
 CASING: 20 IN. 13 3/8 IN.
 WEIGHT: 133,000 LB/F 68,000 LB/F
 BIT SIZE: 26 IN. 17 1/2 IN. 12 1/4 IN.
 DEPTH: 416.0 M 1661.0 M 3066.0 M

TYPE FLUID IN HOLE: F/WTR GEL POLYMER
 DENSITY: 9.30 LB/G
 VISCOSITY: 57.0 S
 PH: 11.6
 FLUID LOSS: 5.5 C3
 SOURCE OF SAMPLE: FLOWLINE
 RM: .820 OHMM AT 110. DEGF
 RMF: .921 OHMM AT 70.0 DEGF
 RMC: 1.110 OHMM AT 70.0 DEGF
 SOURCE RMF/RMC: PRESS /PRESS
 RM AT BHT: .423 OHMM AT 220. DEGF
 RMF AT BHT: .312 OHMM AT 220. DEGF
 RMC AT BHT: .377 OHMM AT 220. DEGF

TIME CIRC. STOPPED: 10:00 09/10
 TIME LOGGER ON BTM.: 10:00 11/10

MAX. REC. TEMP: 220.0 DEGF

LOGGING UNIT NO: 822
 LOGGING UNIT LOC: VEA
 RECORDED BY: A. HALIM / A. SUSANTO
 WITNESSED BY: C. E. REVILLA

REMARKS:

← 5 cm →

EQUIPMENT NUMBERS-

SHM 1772


ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATIONS, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFUL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

CP 28.2 FILE 0 11-OCT-85 19:01

GR (GAPI)

0.0 150.00

CP 28.2 FILE 0 11-OCT-85 11:59

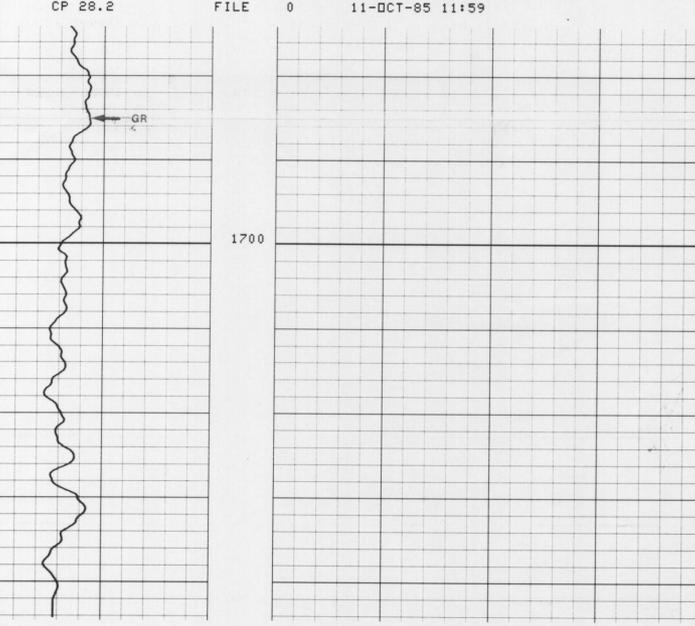

CP 28.2 FILE 0 11-OCT-85 11:55

GR (GAPI)

0.0 150.00

SENSOR MEASURE POINT TO TOOL ZERO

TENS 3.81 METER GR 5.33 METER

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
BS	8.00000	IN	BHS	OPEN	

SHOT SUMMARY LISTING PERFORMED 11-OCT-85 11:10

SHOT	STATUS	DEPTH	TENSION
1	FIRED	3065.06	638.0
2	FIRED	3059.99	829.5
3	FIRED	3035.95	155.3
4	FIRED	3004.05	1049.
5	FIRED	2974.01	677.0
6	FIRED	2967.05	177.3
7	FIRED	2944.99	151.2
8	FIRED	2907.02	170.1
9	FIRED	2863.05	516.0
10	FIRED	2828.99	189.7
11	FIRED	2775.98	183.8
12	FIRED	2751.00	831.5
13	FIRED	2707.06	106.8
14	FIRED	2667.04	91.68
15	FIRED	2637.53	200.3
16	FIRED	2610.05	613.0
17	FIRED	2579.00	107.9
18	FIRED	2549.07	203.2
19	FIRED	2514.03	130.8
20	FIRED	2486.07	107.2
21	FIRED	2464.05	96.50
22	FIRED	2435.04	793.0
23	FIRED	2403.03	100.1
24	FIRED	2377.55	131.7
25	FIRED	2355.99	108.0
26	FIRED	2330.02	593.5
27	FIRED	2297.97	108.0
28	FIRED	2268.05	331.2
29	FIRED	1969.18	511.7
30	FIRED	1941.03	890.5
31	FIRED	1910.99	187.5
32	FIRED	1882.99	128.0
33	FIRED	1877.94	121.3
34	FIRED	1867.08	600.5
35	FIRED	1828.93	-33.87
36	FIRED	1828.06	259.5
37	FIRED	1819.99	451.5
38	FIRED	1802.51	721.5
39	FIRED	1793.07	188.0
40	FIRED	1792.48	162.6
41	FIRED	1780.94	418.0
42	FIRED	1769.98	98.43
43	FIRED	1769.01	270.5
44	FIRED	1765.04	66.93
45	FIRED	1752.98	135.7
46	FIRED	1739.03	23.78
47	FIRED	1729.96	756.0
48	FIRED	1724.98	872.5
49	FIRED	1715.93	743.0
50	FIRED	1698.97	101.1
51	FIRED	1690.99	154.0

DEPTH UNITS : METE BIT SIZE : 8.000 IN


RING TYPE : LARG BULLET TYPE : COMB

POWDER LOAD : 7.00 G POWDER TYPE : AHT

GR (GAPI)

0.0 150.00

CP 28.2 FILE 0 11-OCT-85 10:07

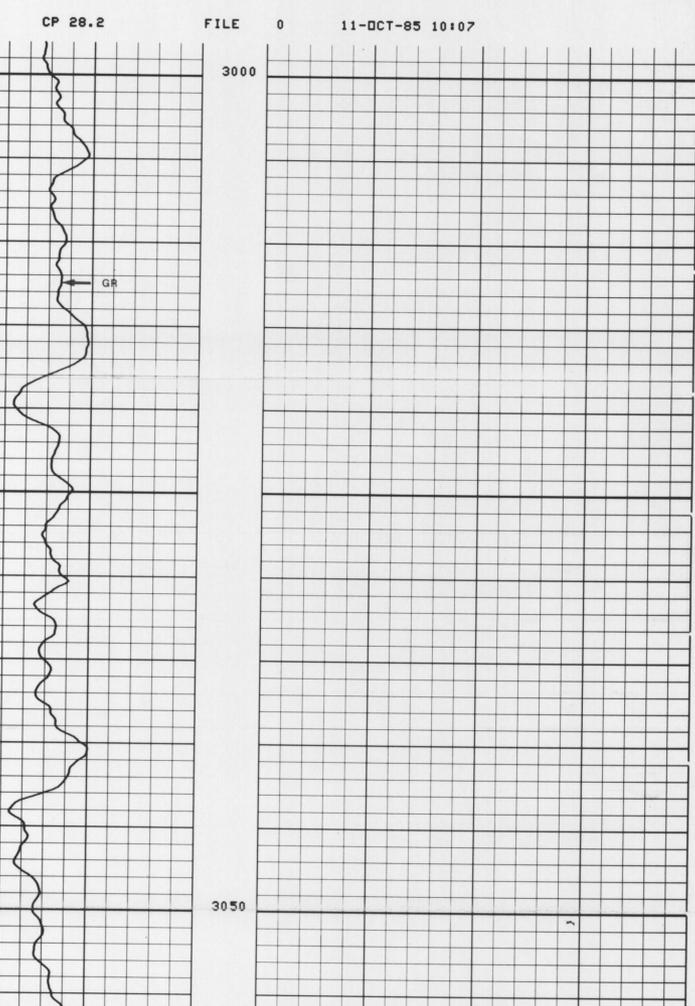

CP 28.2 FILE 0 11-OCT-85 10:00

GR (GAPI)

0.0 150.00

SENSOR MEASURE POINT TO TOOL ZERO

TENS 3.81 METER GR 5.33 METER

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
BS	12.2500	IN	BHS	OPEN	