




INDUCTION-ELECTRICAL LOG

COUNTRY	330137	COMPANY	ESSO EXPLORATION
FIELD	WILDCAT	WELL	BASS #3
WELL	WILDCAT	FIELD	WILDCAT
COMPANY	ESSO EXPLORATION	COUNTRY	AUSTRALIA
STATE	TASMANIA	Location:	LAT 39° 59' 51" S LONG 145° 16' 57" E
Permanent datum	MEAN SEA LEVEL	Elev.:	0
Log Measured From	RT 31	Ft. Above Perm. Datum	31
Drilling Measured From	RT 31	Ft. Above Perm. Datum	74
DATE	4-2-74	Ref. No.:	BNC, M.L., CST FT CDM
First Reading	7985	Elev.:	K. B. 31
Last Reading	7911	D.F.:	31
Interval Measured	74	G.L.:	
Casing Schlumberger	2750		
Depth Reached	7986		
Bottom Driller	7978		
Mud Nature	GEL		
Density / Viscosity	10.8 @ 53		
Mud Resistivity	1.70 @ 66		
Mud Resist. BHT	.57 @ 108		
pH / Fluid Loss	9.0 @ 7.8	CC/30 min.	
Origin of Sample	FLOCLINE	CC/30 min.	
Rmt	1.91 @ 68		
Rmc	1.82 @ 66		
Bit Size	1 1/4		
Casing Size	1 3/8		
Oper. Rig Time	2 1/2 HR		
Truck No.	2035		
Recorded By	BOULDER		
Witness	LAPORE		

REMARKS: WAVE COMPENSATING DEVICE USED
DISPLACEMENT 2-3 FT

LOGGING DATA		EQUIPMENT DATA	
Run No.	4	Run No.	4
Type of Sonde	6 FF40	Panel	F 780
S. N. Spacing	16"	Cartridge	F 707
Stand-off	1.5"	Sonde	M 461
S. B. R.	1	Test Loop	C 782

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m ² /m	CONDUCTIVITY milliohms - m ² /m = $\frac{1000}{\text{ohms} \cdot \text{m}^2/\text{m}}$
		16" NORMAL	INDUCTION
-110+	0	0	0
	0	20	2000
	0	200	1000
	0	INDUCTION	
	0	20	
	0	200	

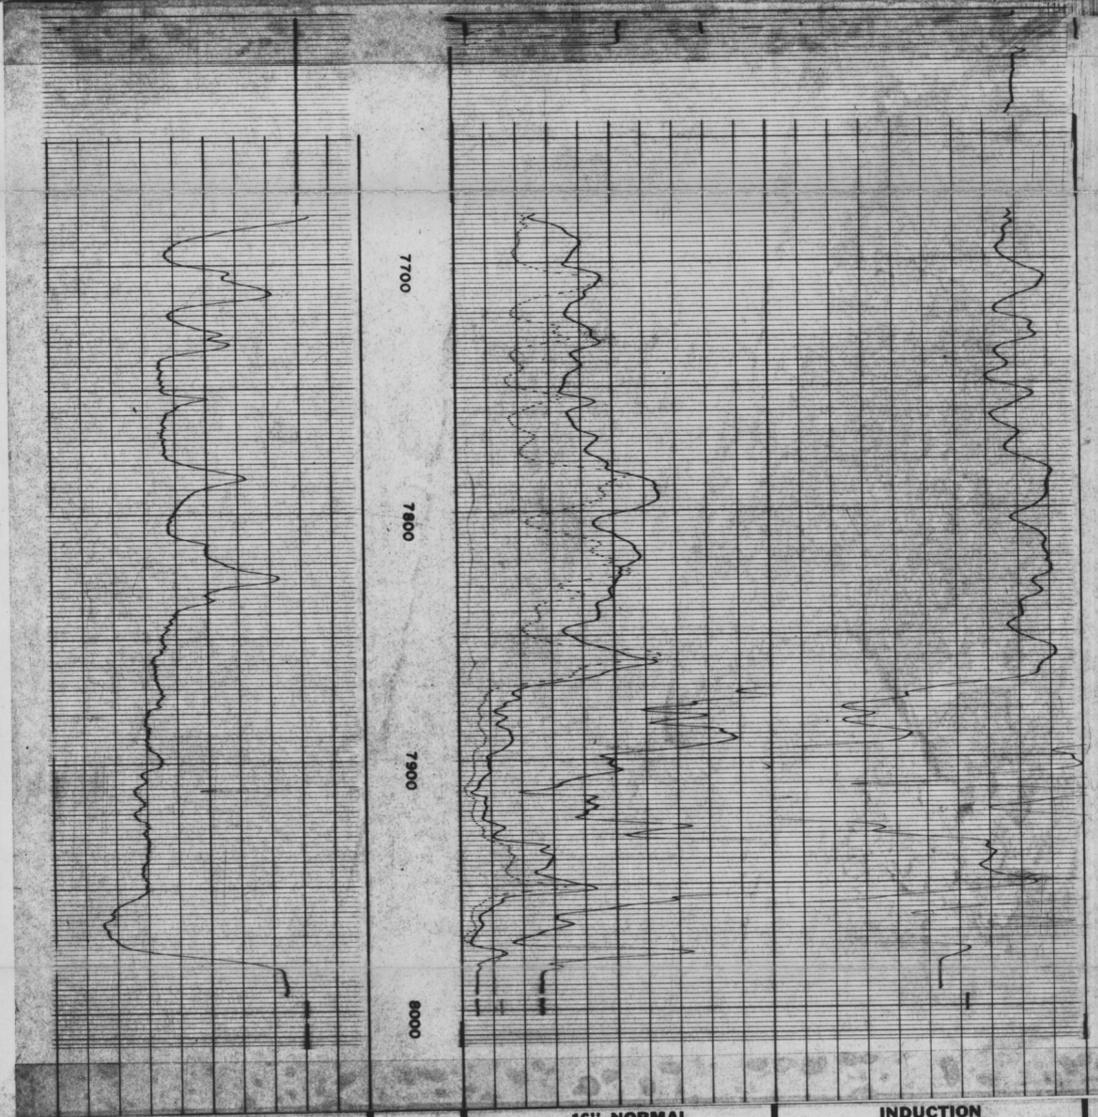

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m ² /m	CONDUCTIVITY milliohms - m ² /m = $\frac{1000}{\text{ohms} \cdot \text{m}^2/\text{m}}$
		16" NORMAL	INDUCTION
-110+	0	0	0
	0	20	2000
	0	200	1000
	0	INDUCTION	
	0	20	
	0	200	

COMPANY	ESSO EXPLORATION	SCHL. F.R.	7985
WELL	BASS 3#	SCHL. T.D.	7986
FIELD	WILDCAT	DRLR. T.D.	7978
COUNTRY	AUSTRALIA	STATE	TASMANIA