SCHLUMBERGER

OR-0332

INDUCTION-ELECTRICAL LOG

COUNTRY	
FIELD	
WELL	330138
COMPANY	

COMPANY	ESSO EXPLORATION
WELL	BASS #3
FIELD	WILDCAT
COUNTRY	AUSTRALIA STATE TASMANIA

Location: LAT 39° 59' 51"
LONG 145° 16' 57"

Other Services: FDL-C BHC, MLL, CST FT, CDM

Ref. No.:

Permanent datum MEAN SEA LEVEL; Elev.: 0
Log Measured From RT 31 Ft. Above Perm. Datum
Drilling Measured From RT 31 Ft. Above Perm. Datum
Elev.: K.B.
D.F. 31
G.L.

RUN No. | Depth Scale	4 | 5"		
Date	30-3-67		
First Reading	7985		
Last Reading	7911		
Interval Measured	74		
Casing Schlumberger	—		
Casing Driller	2750		
Depth Reached	7986		
Bottom Driller	7978		
Mud Nature	GEL		
Density | Viscosity	10.8 | 53	|	|
Mud Resistivity	1.70 @ 66 °F	@ °F	@ °F
Mud Resist. BHT	.57 @ 208 °F	@ °F	@ °F
pH | Fluid Loss	9.0 | 7.8 CC/30 min.	| CC/30 min.	| CC/30 min.
Origin of Sample	FLOWLINE		
Rmf	1.31 @ 68 °F	@ °F	@ °F
Rmc	1.82 @ 66 °F	@ °F	@ °F
Bit Size	12¼ CSG To TD	To	To
	To	To	To
Casing Size	13 3/8		
Opr. Rig Time	2½ HR		
Truck No.	2035		
Recorded By	BOWLER		
Witness	LAPORTE		

FOLD HERE

REMARKS: WAVE COMPENSATING DEVICE USED
DISPLACEMENT 2'

5 cm

LOGGING DATA			
Run No.	4		
Type of Sonde	6FF40		
S. N. Spacing	16"		
Stand-off	1.5"		
S. B. R.	1		

EQUIPMENT DATA			
Run No.	4		
Panel	F780		
Cartridge	F707		
Sonde	M 461		
Test Loop	C 732		

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m²/m	CONDUCTIVITY milliohms - m²/m = 1000/ohms - m2/m
-|10|+		16" NORMAL 0 4 0 20 0 200 INDUCTION 0 20 0 200	INDUCTION 1000 0 2000 1000

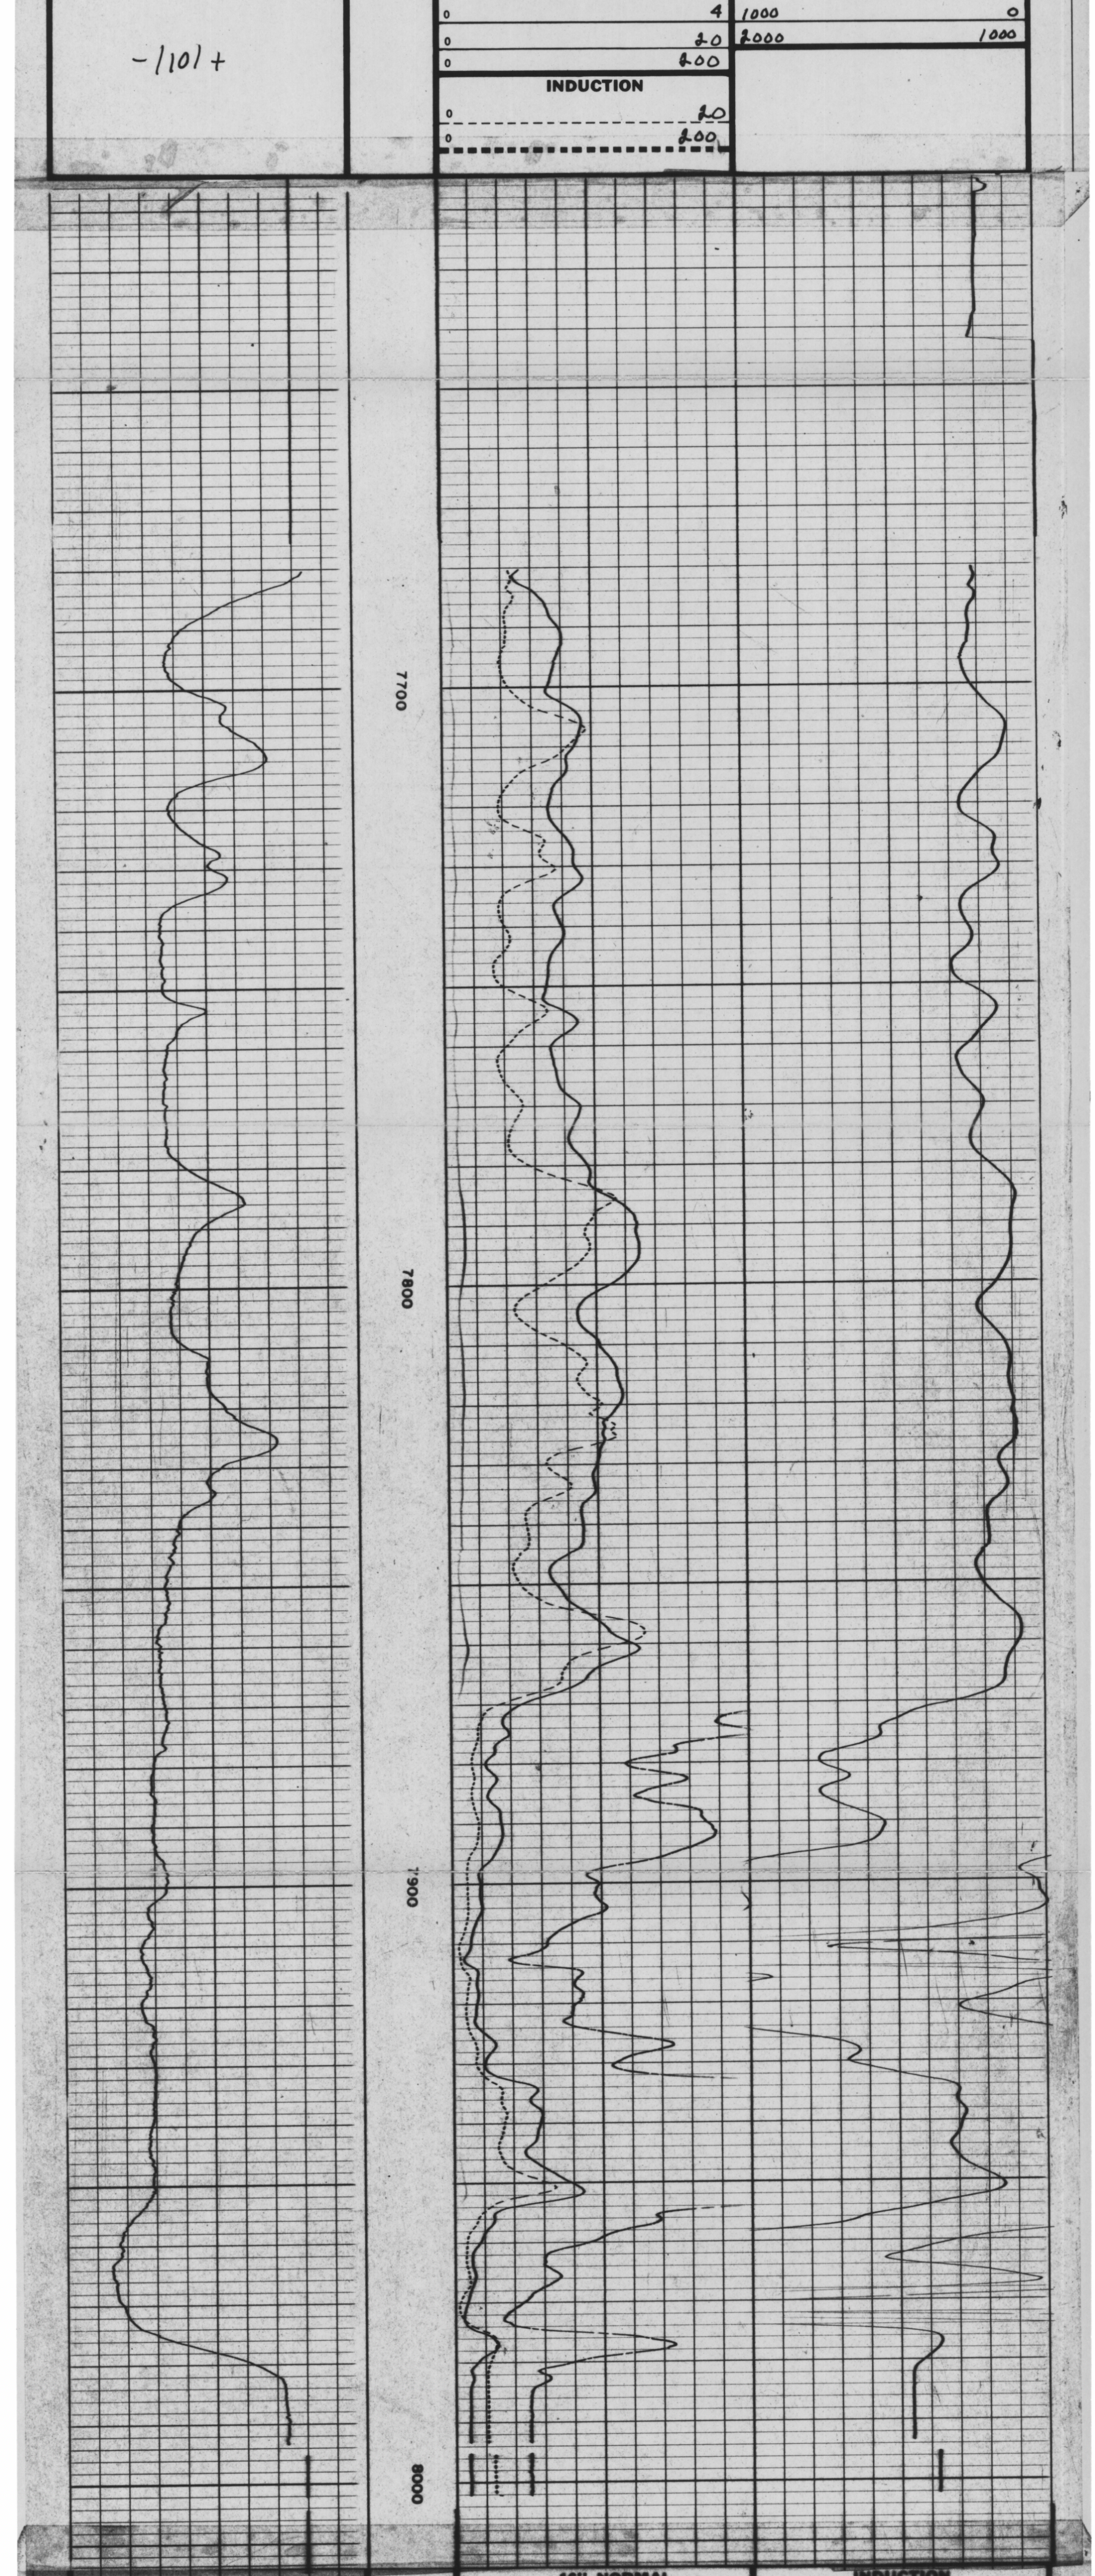

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m²/m	CONDUCTIVITY milliohms - m²/m 1000/ohms - m2/m
-|10|+		16" NORMAL 0 4 0 20 0 200 INDUCTION 0 20 0 200	INDUCTION 1000 0 2000 1000

COMPANY	ESSO EXPLORATION	SCHL. F.R.	7985
WELL	BASS #3	SCHL. T.D.	7986
FIELD	WILDCAT	DRLR. T.D.	7978
COUNTRY	AUSTRALIA STATE TASMANIA		

CALIBRATION FILMS

Surface Calibration
IRP-F 780
IRC-F 707
IRS-M 461
ITL-C 732

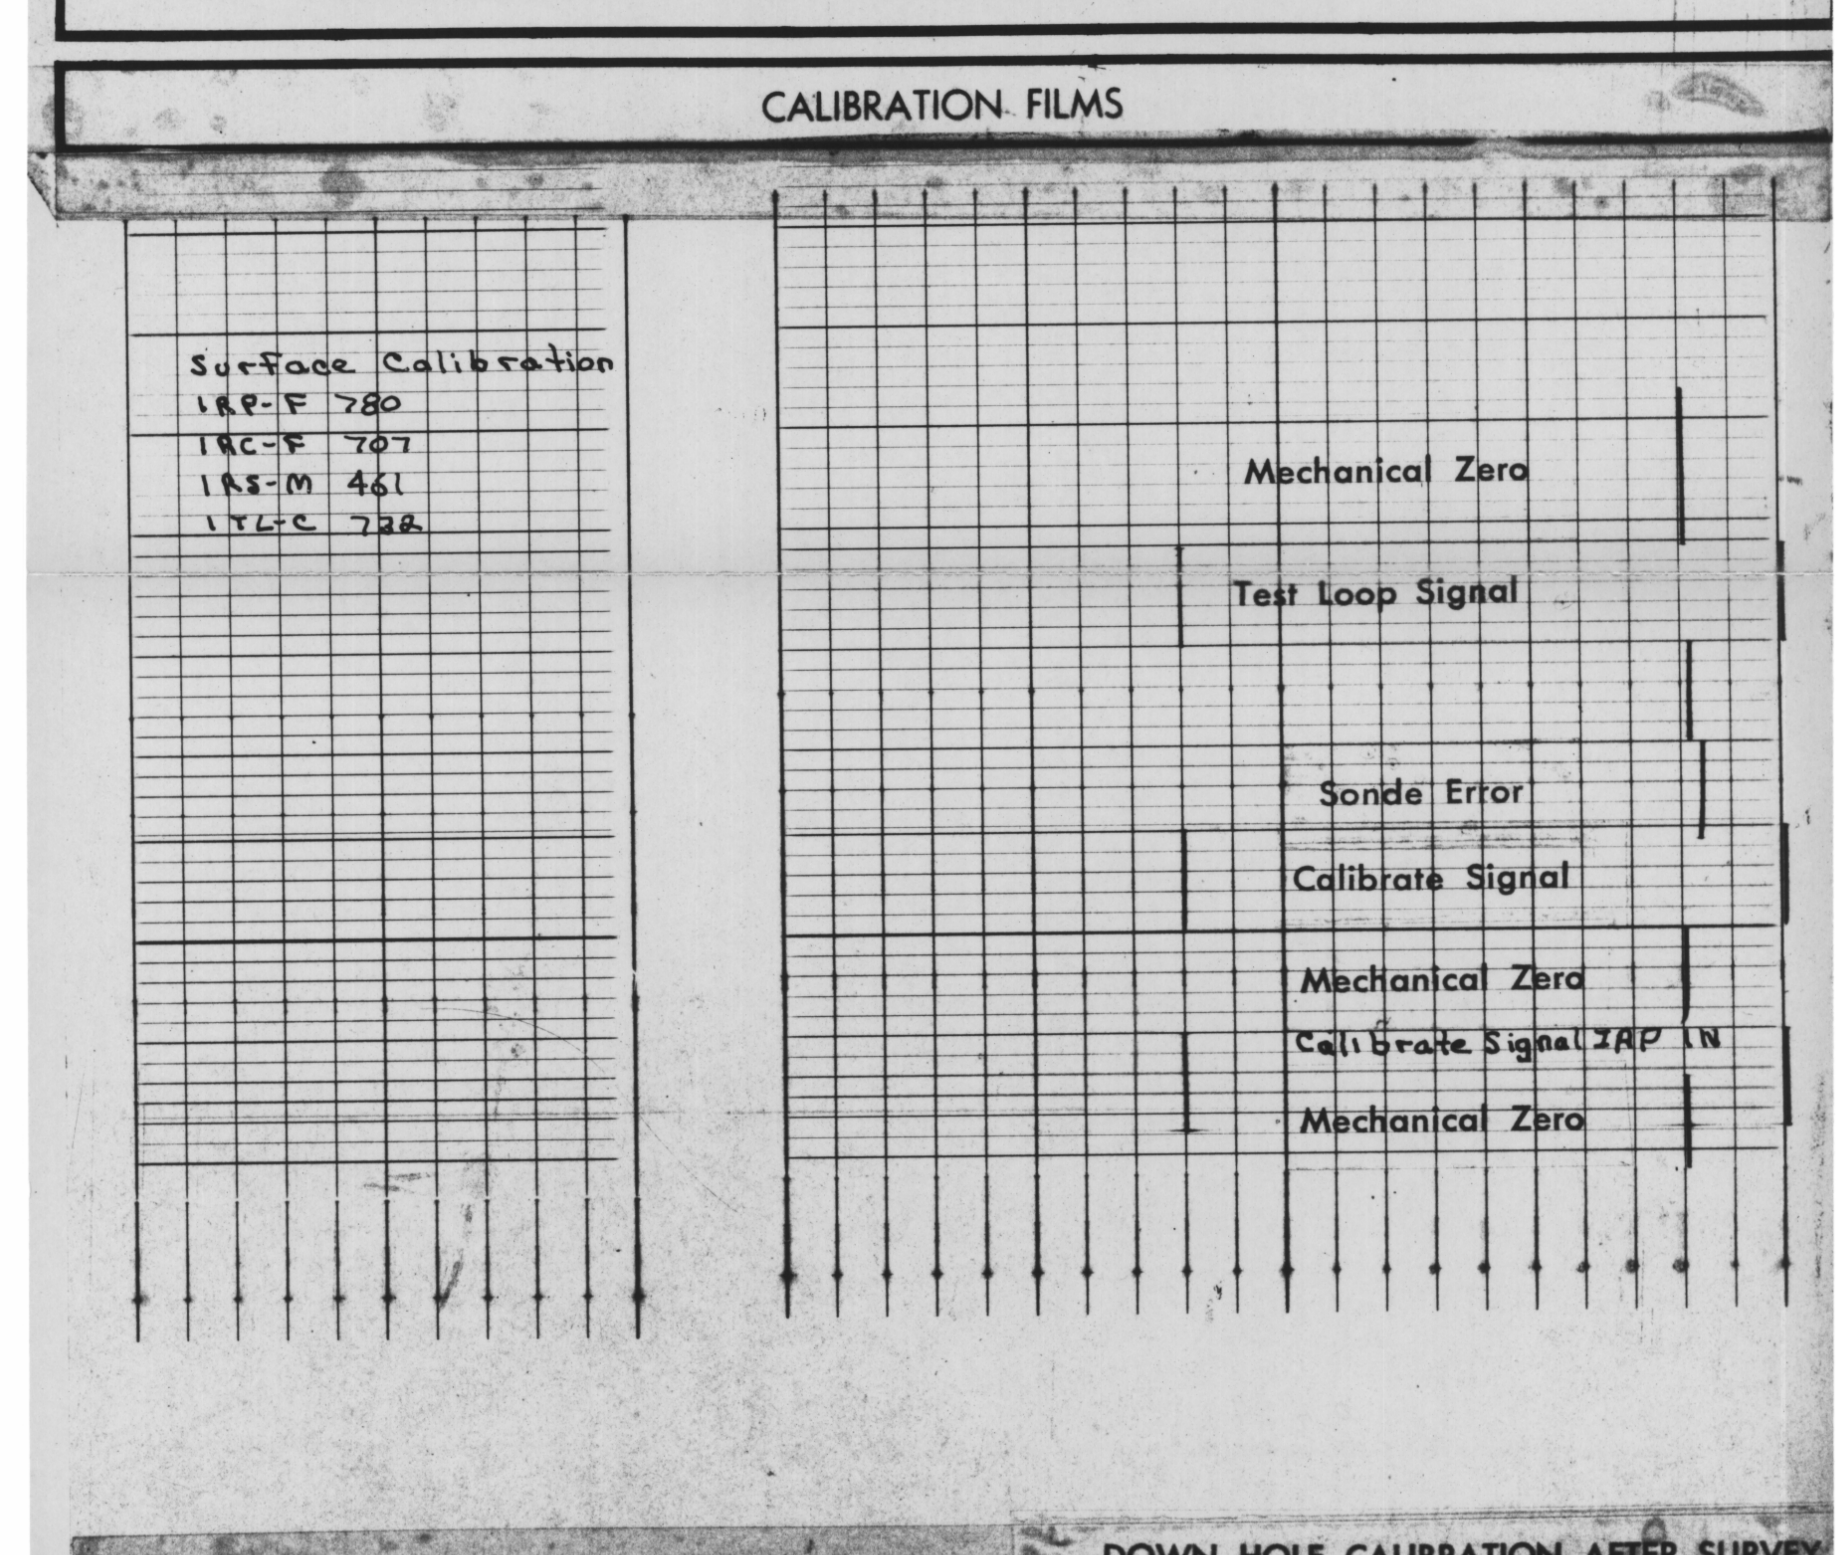

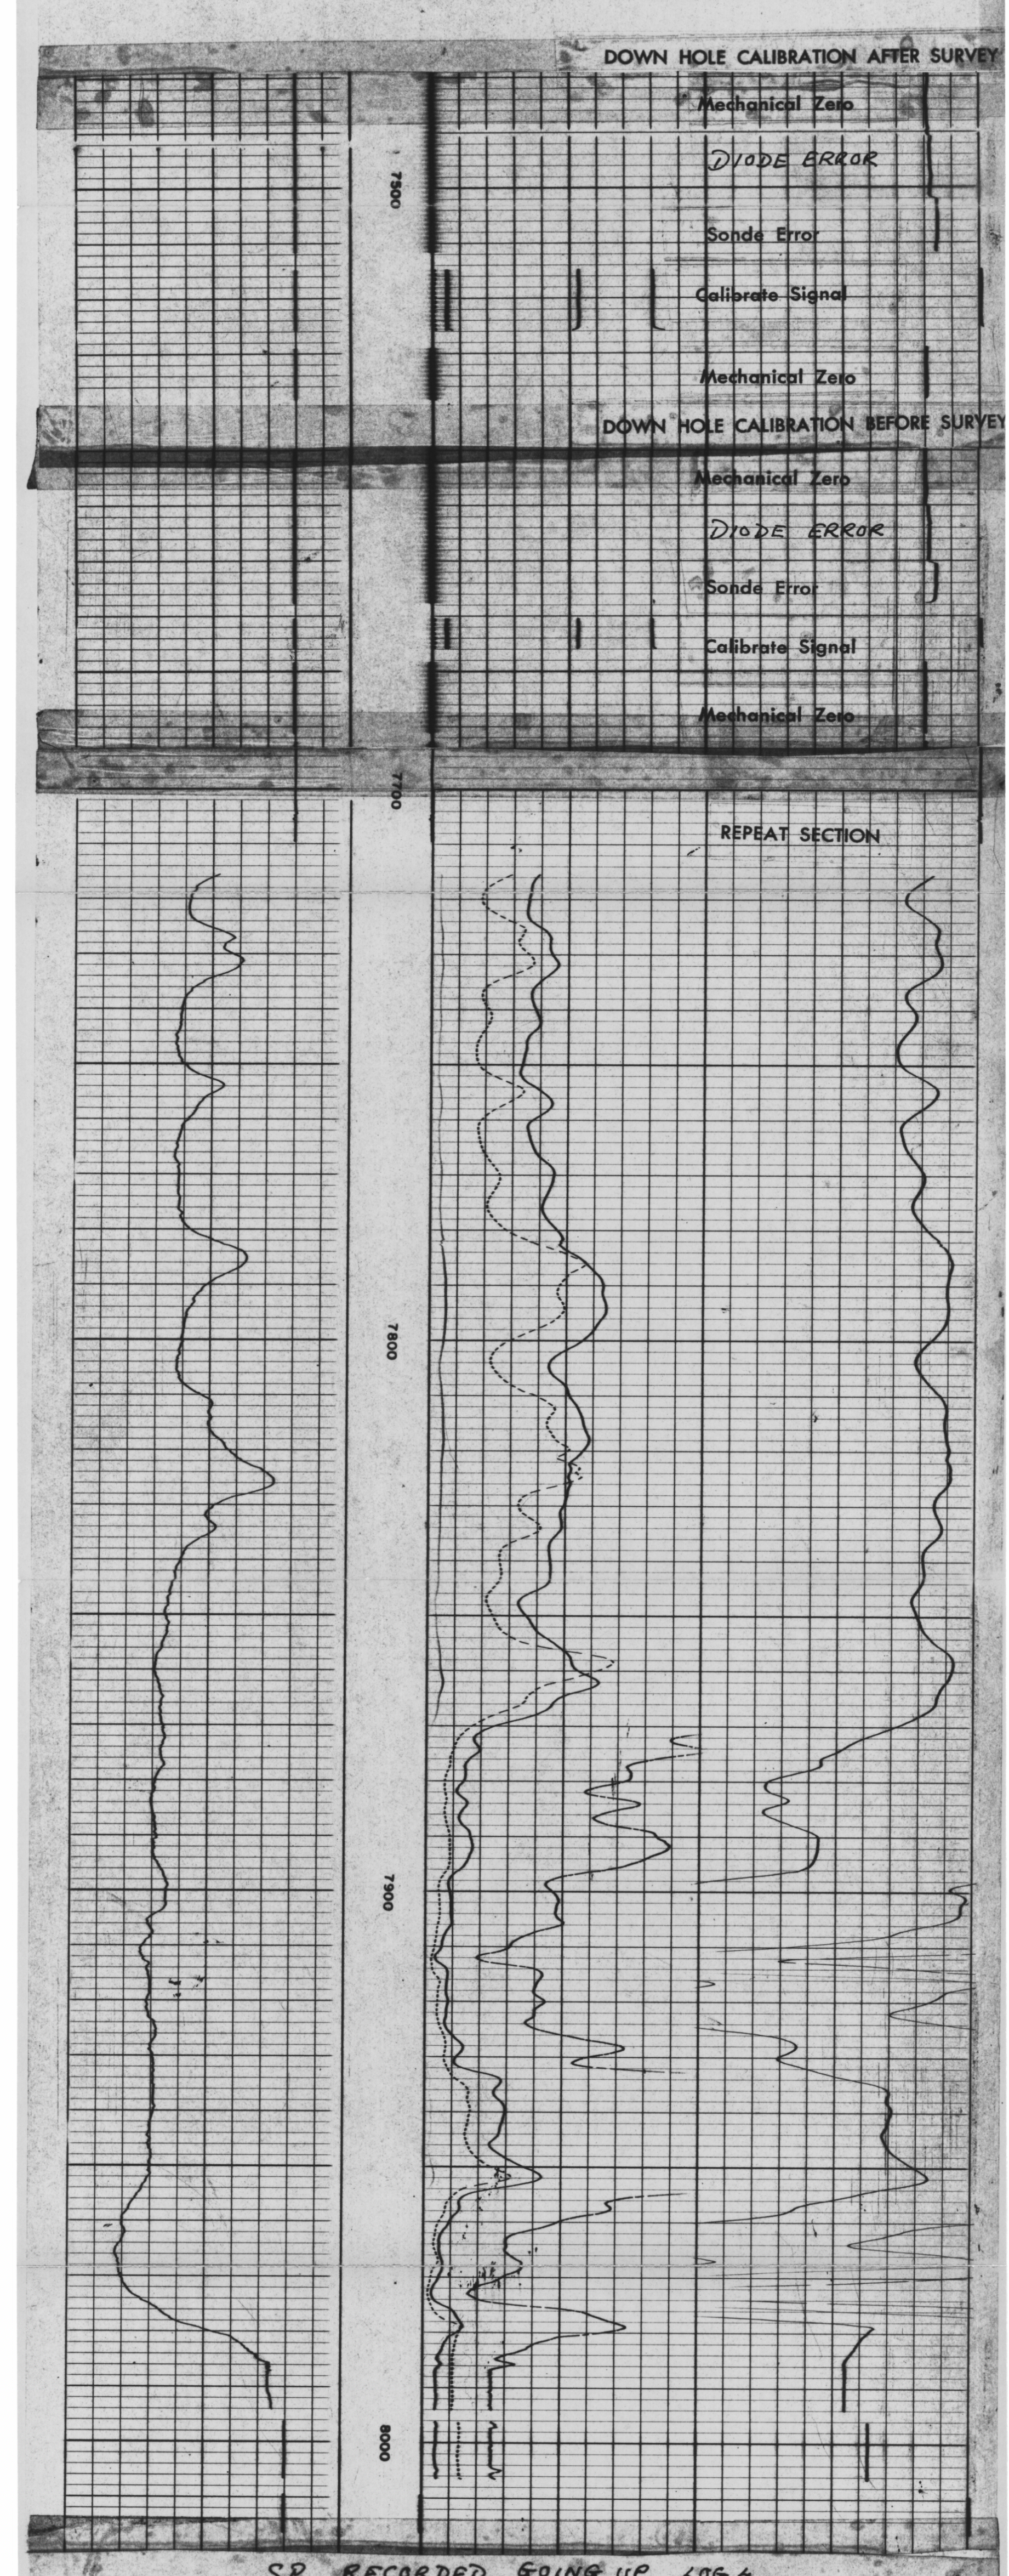

SP RECORDED GOING UP LOG 4.

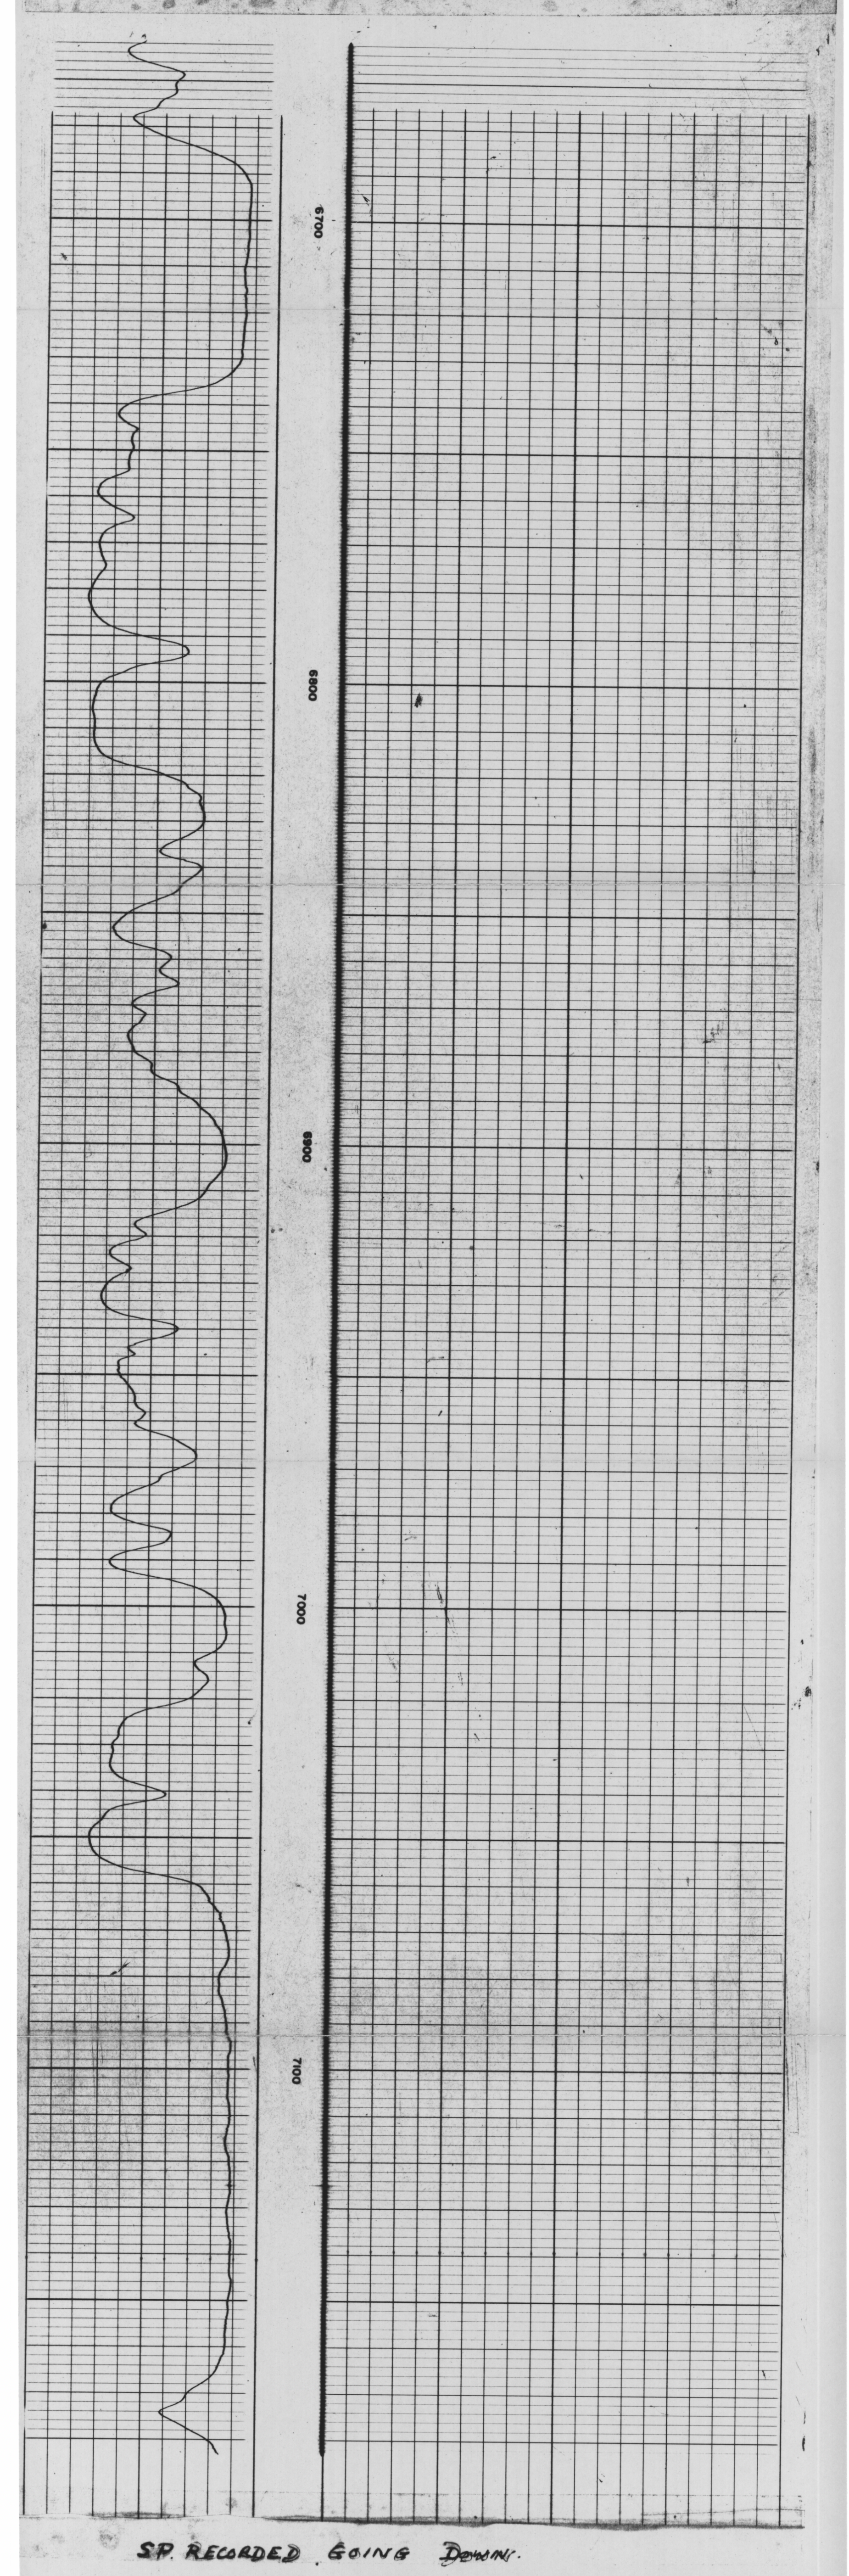

SP RECORDED GOING DOWN.
CURRENT OFF, RUN 3.

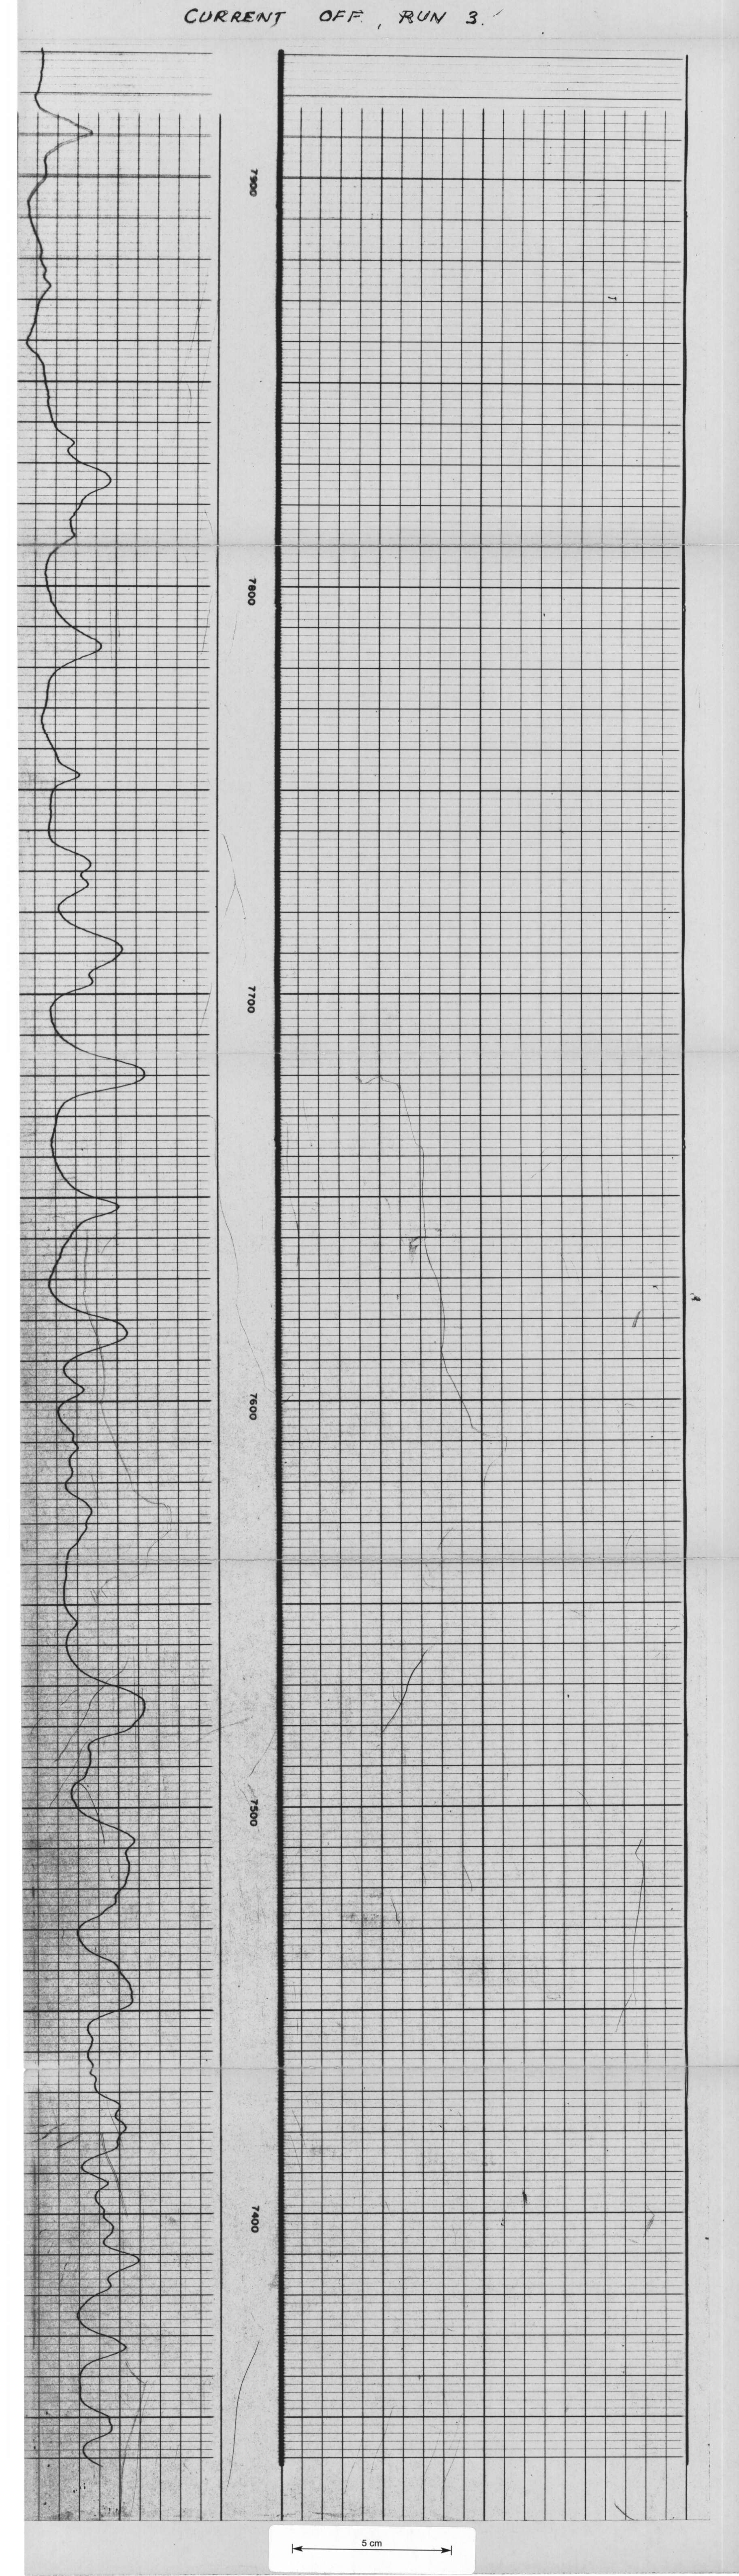

5 cm