
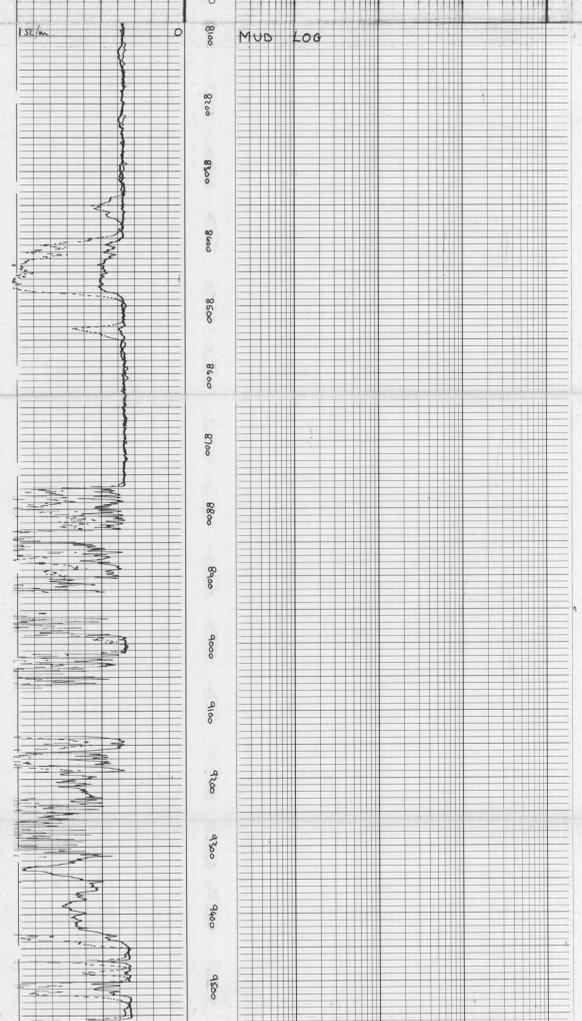


10"	20"	5"	
CALIPER HOLE DIAMETER IN INCHES			
5		0	
MICRO INVERSE 1" x 1"			
5		0	
MICRO NORMAL 2"			
MICRO RESISTIVITY OHMS - M ² /M		0.2	1.0 10 100 1000 2000
DEPTH		RESISTIVITY OHMS - M ² /M	


COMPANY HEMATITE PETROLEUM PTY. LTD. SCHL. FR. 9685
 WELL AROO No. 1. SCHL. TD. 9686
 FIELD WILDCAT DRLR TD. 9686
 COUNTY AUSTRALIA STATE TASMANIA Elev. KB 32'
 DF 31'
 GI-250'

CALIBRATION DATA

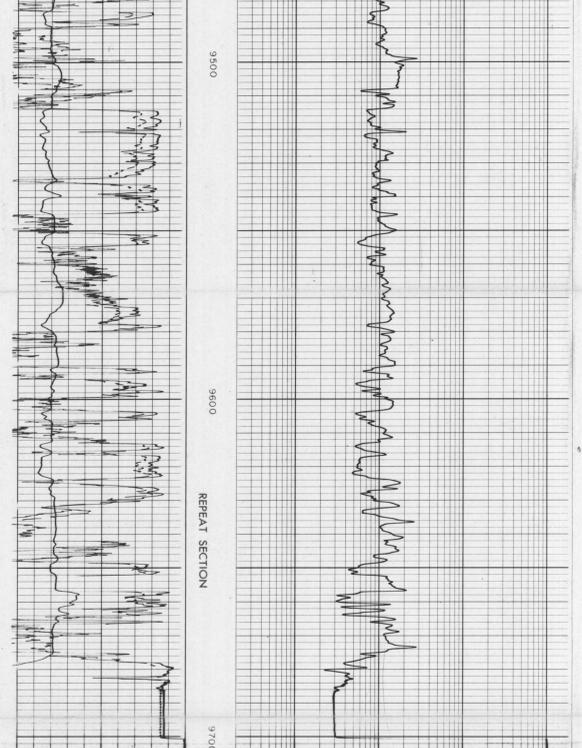

DOWN HOLE CALIBRATION AFTER SURVEY

DOWN HOLE CALIBRATION BEFORE SURVEY

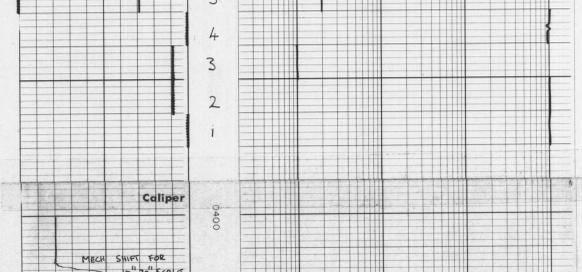

PHL CALIBRATION CODING
 1) Mechanical zero.
 2) 1000 } Panel calibration.
 3) 1
 4) 1000 Ω/m. Elec zero.
 5) 2 Ω/m Calibrate.

CALIBRATION DATA		
COMPANY HEMATITE PETROLEUM PTY. LTD.	SCHL. FR. 9685	
WELL AROO No. 1.	SCHL. TD. 9686	
FIELD WILDCAT	DRLR TD. 9686	
COUNTY AUSTRALIA STATE TASMANIA	Elev. KB 32' DF 31' GI-250'	

