

ESSO STANDARD OIL (AUSTRALIA) LTD.

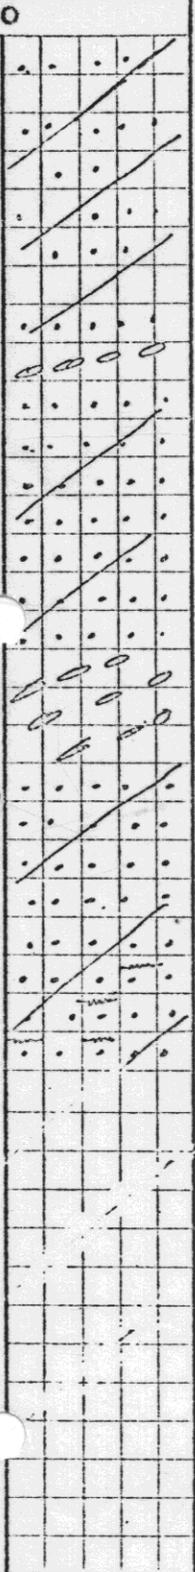
CORE DESCRIPTION

Core No. 16

WELL: PLAWA A-1

Interval Cored 10450-10477 ft., Cut 27 ft., Recovered 27 ft., (100%) Fr. OTWAY.

Bit Type C-2, Bit Size 8 5/16 in., Desc. by E.A. James Date MARCH 30/68

Depth & Coring Rate (min./ft.)	Graphic (1" = 5')	Shows	Interval (ft.)	Descriptive Lithology
<p>0</p>  <p>10</p> <p>20</p> <p>27</p>	<p>10450</p> <p>10460</p> <p>10470</p> <p>10477 END of core.</p>			<p>S.S. lithic, quartzose & up to 20% black rounded carbonaceous grains, med. gr, non calcareous; greenish cast on cream & white sand with black specks; No fluorescence; 2 or 3 traces of bleeding (popping). No oil stain and no mud. Very fine sand & silt. Very high bedding dips, up to 30°. Trace slickensides. Shale pebbles 10452-10459 and 10466-10469 heat 3' of core is more silty and a greywacke.</p>

REMARKS:

