

OR 341B

Schlumberger

DIL-BHC-CAL-GR 1:600 873-94M

CSU Field Log

ENCLOSURE 11b

COMPANY: HEMATITE PETROLEUM PTY. LTD. 380683 OTHER SERVICES-

WELL: PIPPA 1

FIELD: WILDCAT
 SUITE: SUITE 1 RUN 1
 STATE: TASMANIA
 NATION: AUSTRALIA
 LOCATION: BASS BASIN

SEC: TWP: RGE:
 LONGITUDE: 40 23 11.26S
 LONGITUDE: 145 41 44.96

PERMANENT DATUM: MSL ELEVATIONS-
 ELEV. OF PERM. DATUM: KB: 21.0 M PROGRAM
 LOG MEASURED FROM: DF: 20.7 M TAPE NO: 20.1A
 20.7 M ABOVE PERM. DATUM GL: -73.0 M
 DRLG. MEASURED FROM: DF

DATE: 8 MAY 1982
 RUN NO: 1

DEPTH-DRILLER: 880.0 M
 DEPTH-LOGGER: 875.0 M
 BTH. LOG INTERVAL: 873.0 M
 TOP LOG INTERVAL: 94.0 M

CASING-DRILLER: 213 M
 CASING-LOGGER: 213 M
 CASING: 20
 WEIGHT: 94.00 LB/F
 BIT SIZE: 17 1/2
 DEPTH: 880 M

TYPE FLUID IN HOLE: SEAWATER GEL
 DENSITY: 9.1 LB/G
 VISCOSITY: 35.0 S
 PH: 7.0
 FLUID LOSS: NOT CONTROLLED.

SDURCE OF SAMPLE: FLOWLINE
 RM: 0.370 OHM AT 14.4 DC
 RMF: 0.315 OHM AT 13.3 DC
 RMC: 0.542 OHM AT 12.2 DC
 SDURCE RMF/RMC: PRESS/PRESS
 RM AT BHT: 0.218 OHM AT 39.4 DC
 RMF AT BHT: 0.180 OHM AT 39.4 DC
 RMC AT BHT: 0.300 OHM AT 39.4 DC

TIME CIRC. STOPPED: 0300/8
 TIME LOGGER ON BTH.: 0930/8

MAX. REC. TEMP: 39.4 DC

LOGGING UNIT NO: 500
 LOGGING UNIT LOC: S. CROSS
 RECORDED BY: M. AN
 WITNESSED BY: M. SMITH M. HEWKES

REMARKS:
 1.5 INCH STANDOFF USED ON INDUCTION
 SP NOISY-UNKNOWN CAUSE


EQUIPMENT NUMBERS-

DIS 1092	DIC 1655	SLS RC 741	SLC K 741
SGC JAR 1537	NSM 973	SLM 973	SLM 973
IEM BC 946			

ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATIONS, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFUL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

FILE

BS (IN)	ILD (DHMM)	
10.00 20.00	0.0 10.00	
CAL (IN)	SFLA (DHMM)	
10.00 20.00	0.0 2.000	
GR (GAPI)	SFLA (DHMM)	CILD (MMHQ)
0.0 150.0	0.0 10.00 2000.	0.0
SP (MV)	*DT (US/M)	
-80.00 20.00	900.0	100.0

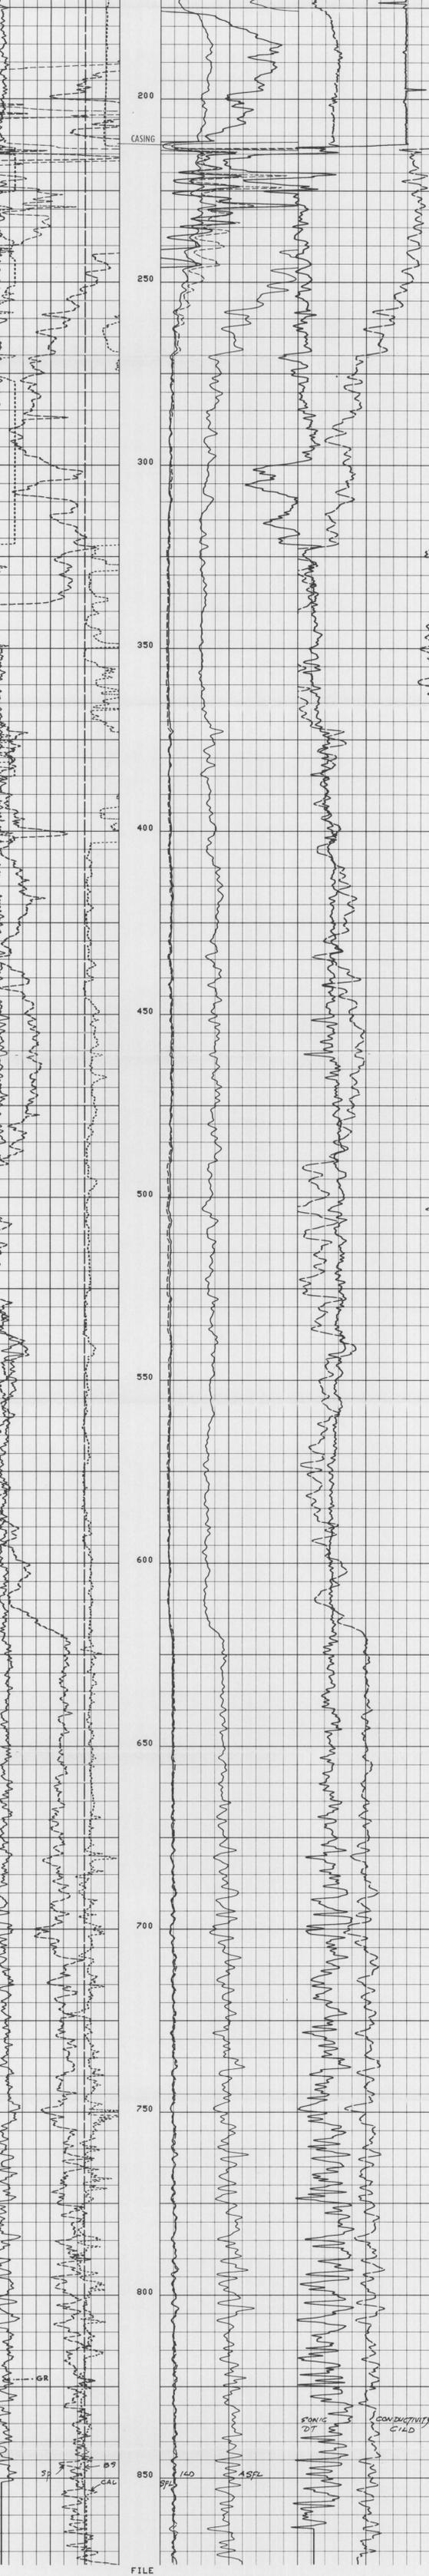

FILE

BS (IN)	ILD (DHMM)	
10.00 20.00	0.0 10.00	
CAL (IN)	SFLA (DHMM)	
10.00 20.00	0.0 2.000	
GR (GAPI)	SFLA (DHMM)	CILD (MMHQ)
0.0 150.0	0.0 10.00 2000.	0.0
SP (MV)	*DT (US/M)	
-80.00 20.00	900.0	100.0

SENSOR MEASURE POINT TO TENSION REFERENCE POINT

AMPL 10.5 METER	DT 9.8 METER
SRAT 9.8 METER	DTL 10.5 METER
GR 22.5 METER	TT 10.5 METER
ILD 2.1 METER	CALI 16.6 METER
ILM 1.0 METER	SFL 1.2 METER
SPAR .0 METER	SP .0 METER
CMSF 16.5 METER	TENS .0 METER
MDIS 8.0 METER	II 16.6 METER

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
CDTS	100.0		BS	17.50	IN
DTP	189.0	US/F	DTH	56.00	US/F
SBR	1.000	DHMM	DSEC	6.200	MMHQ
SPT	STAN		MSEC	7.800	MMHQ
DD	0.0		BHS	DPEN	

