− 10 +	5"	AMP. SHORT NORMAL 0 — 2 A-16"-M SHORT NORMAL 0 — 10 0 — 100 INDUCTION 0 — 10 0 — 100	6 FF40 INDUCTION 1000 — 0 2000 — 1000 3800 — 2000
SPONTANEOUS-POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m²/m	CONDUCTIVITY millimhos/m = 1000/ohms - m²/m

COMPANY ESSO AUSTRALIA LIMITED
WELL PELICAN NO 3
FIELD WILDCAT
COUNTY AUSTRALIA STATE TASMANIA

SCHL. FR. 9349
SCHL. TD. 9340
DRLR TD. 9397
Elev:
KB 32
DF 31
GL -263

CALIBRATION DATA

Diode Error
Sonde Error
Calibrate Signal with Skin Effect Correction
Calibrate Signal
Mechanical Zero
DOWN HOLE CALIBRATION BEFORE SURVEY
Diode Error
Sonde Error
Calibrate Signal with Skin Effect Correction
Calibrate Signal
Mechanical Zero

[redacted]

REPEAT SECTION

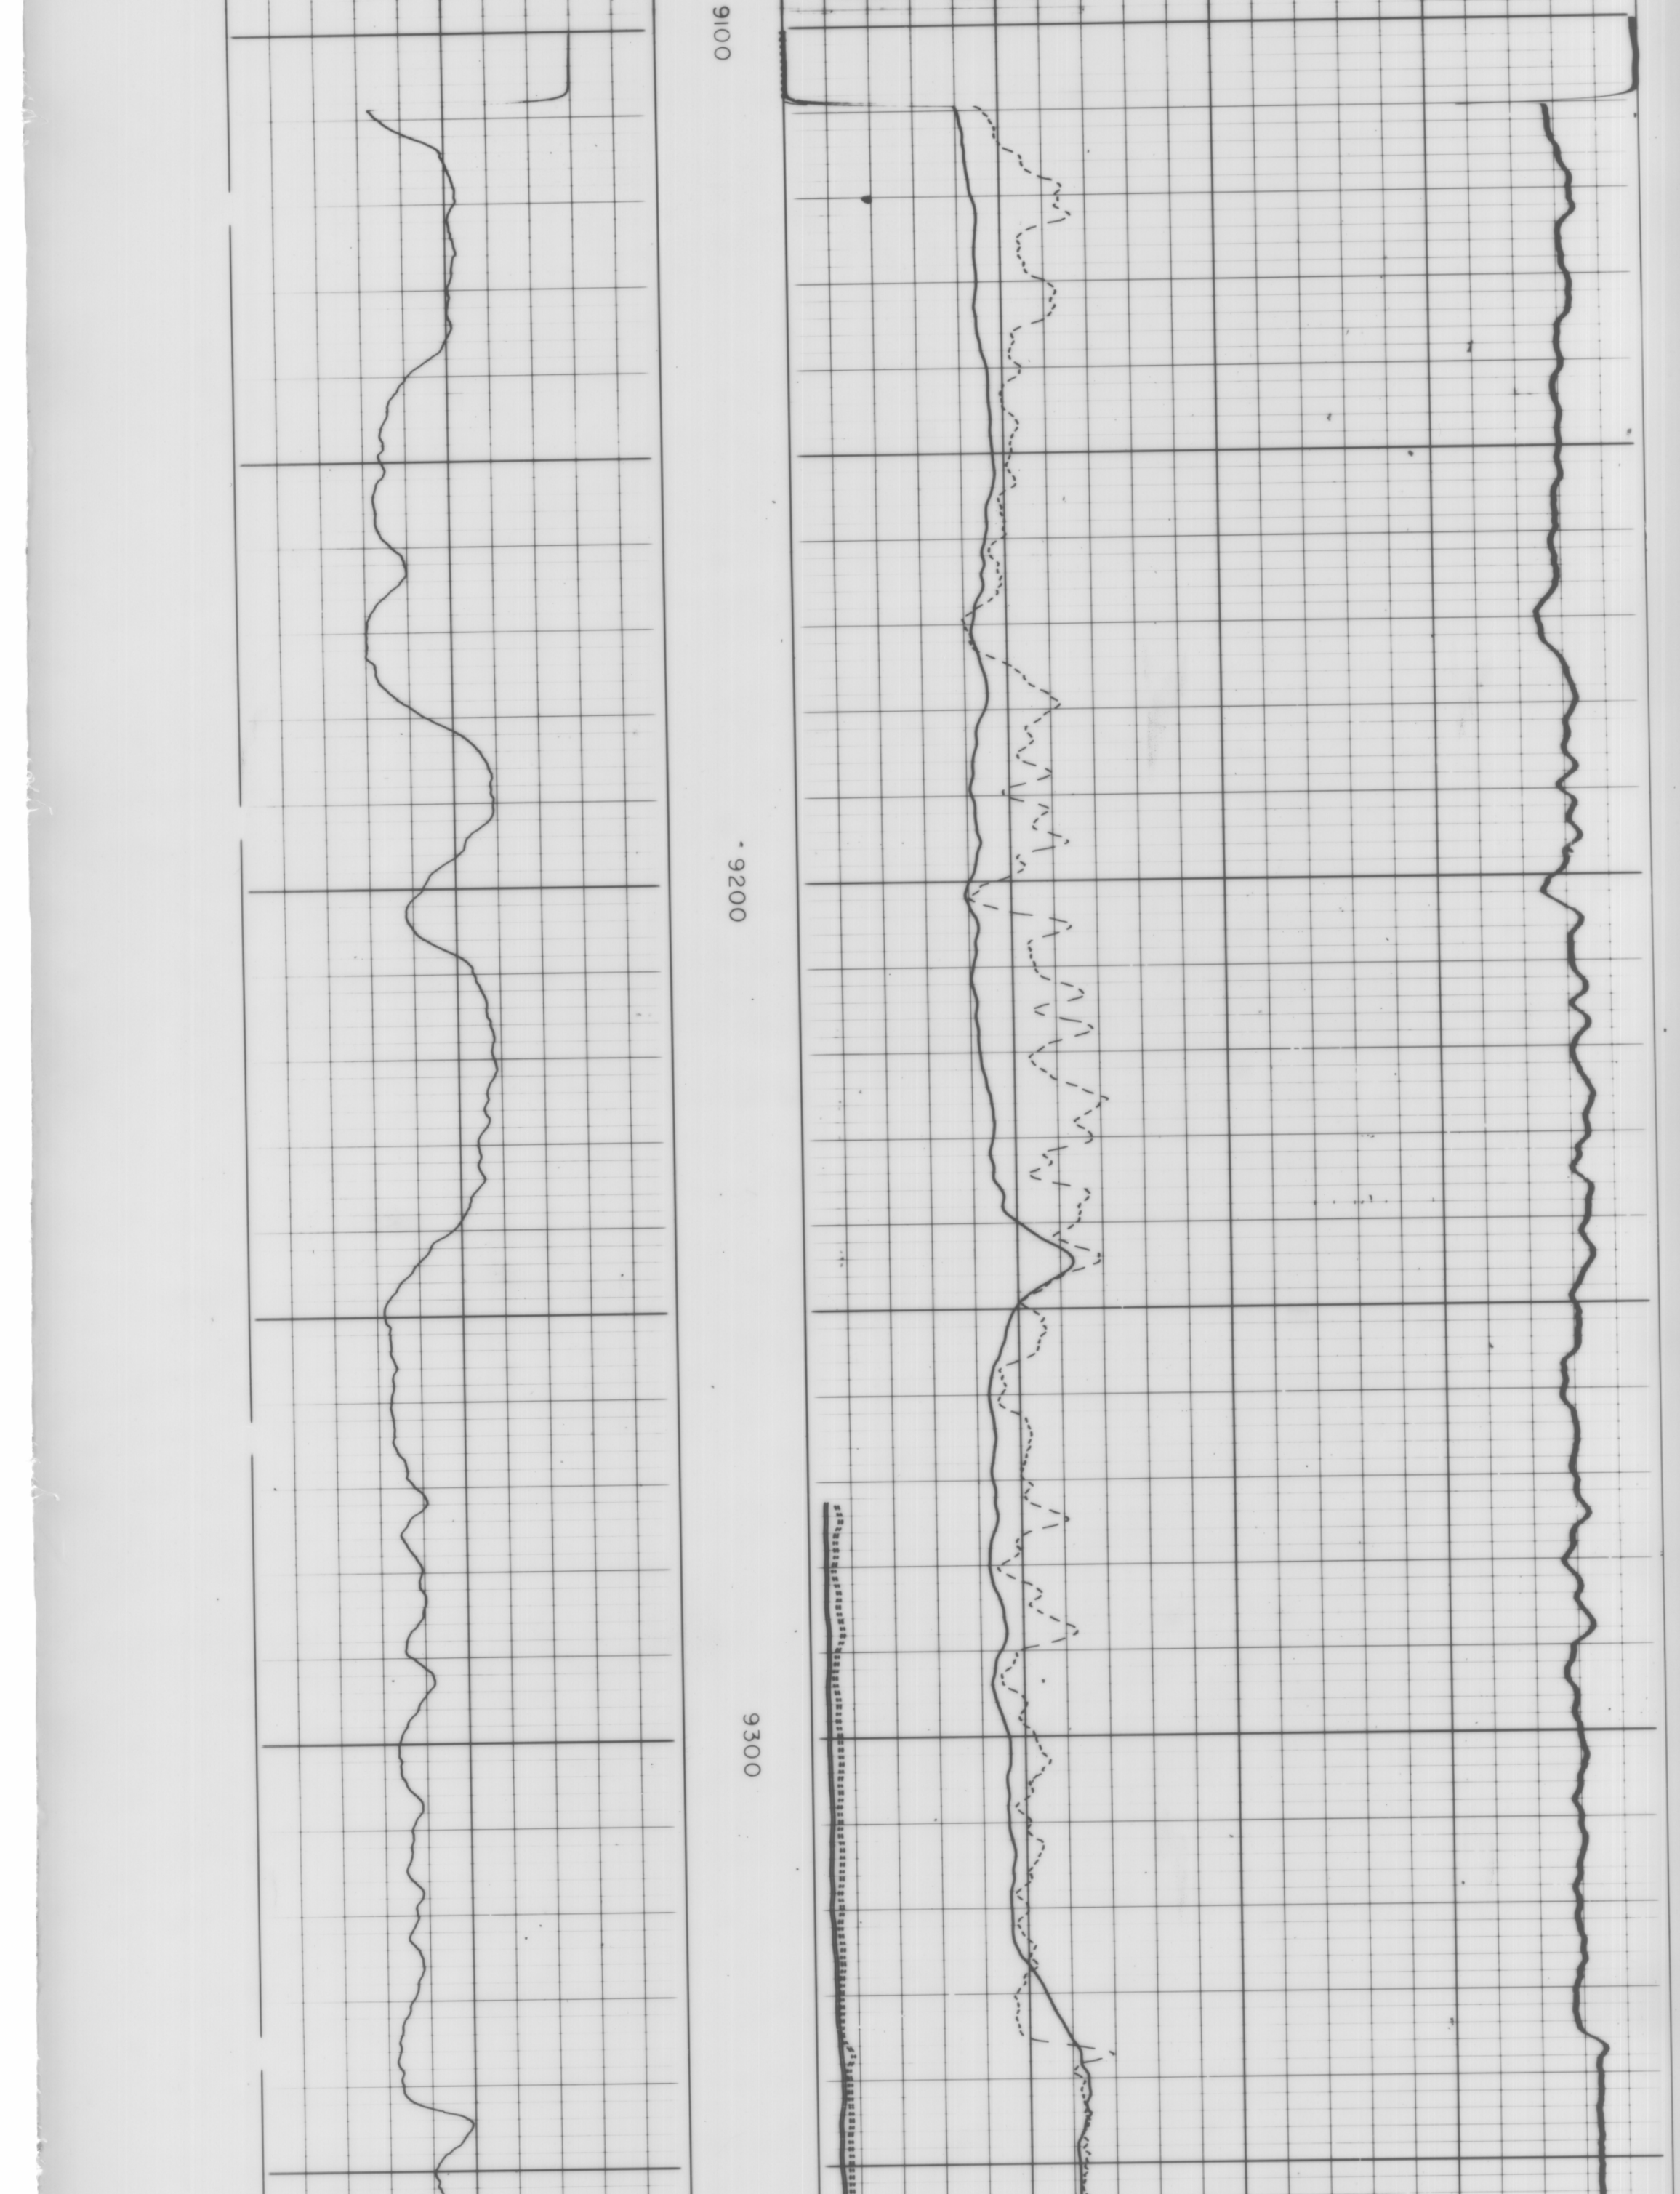

CALIBRATION DATA

COMPANY ESSO STANDARD OIL AUSTRALIA LIMITED
WELL PELICAN NO 3
FIELD WILDCAT
COUNTY AUSTRALIA STATE TASMANIA.

SCHL. FR. 9349
SCHL. TD. 9350
DRLR TD. 9397
Elev:
KB 32
DF 31
GL -263

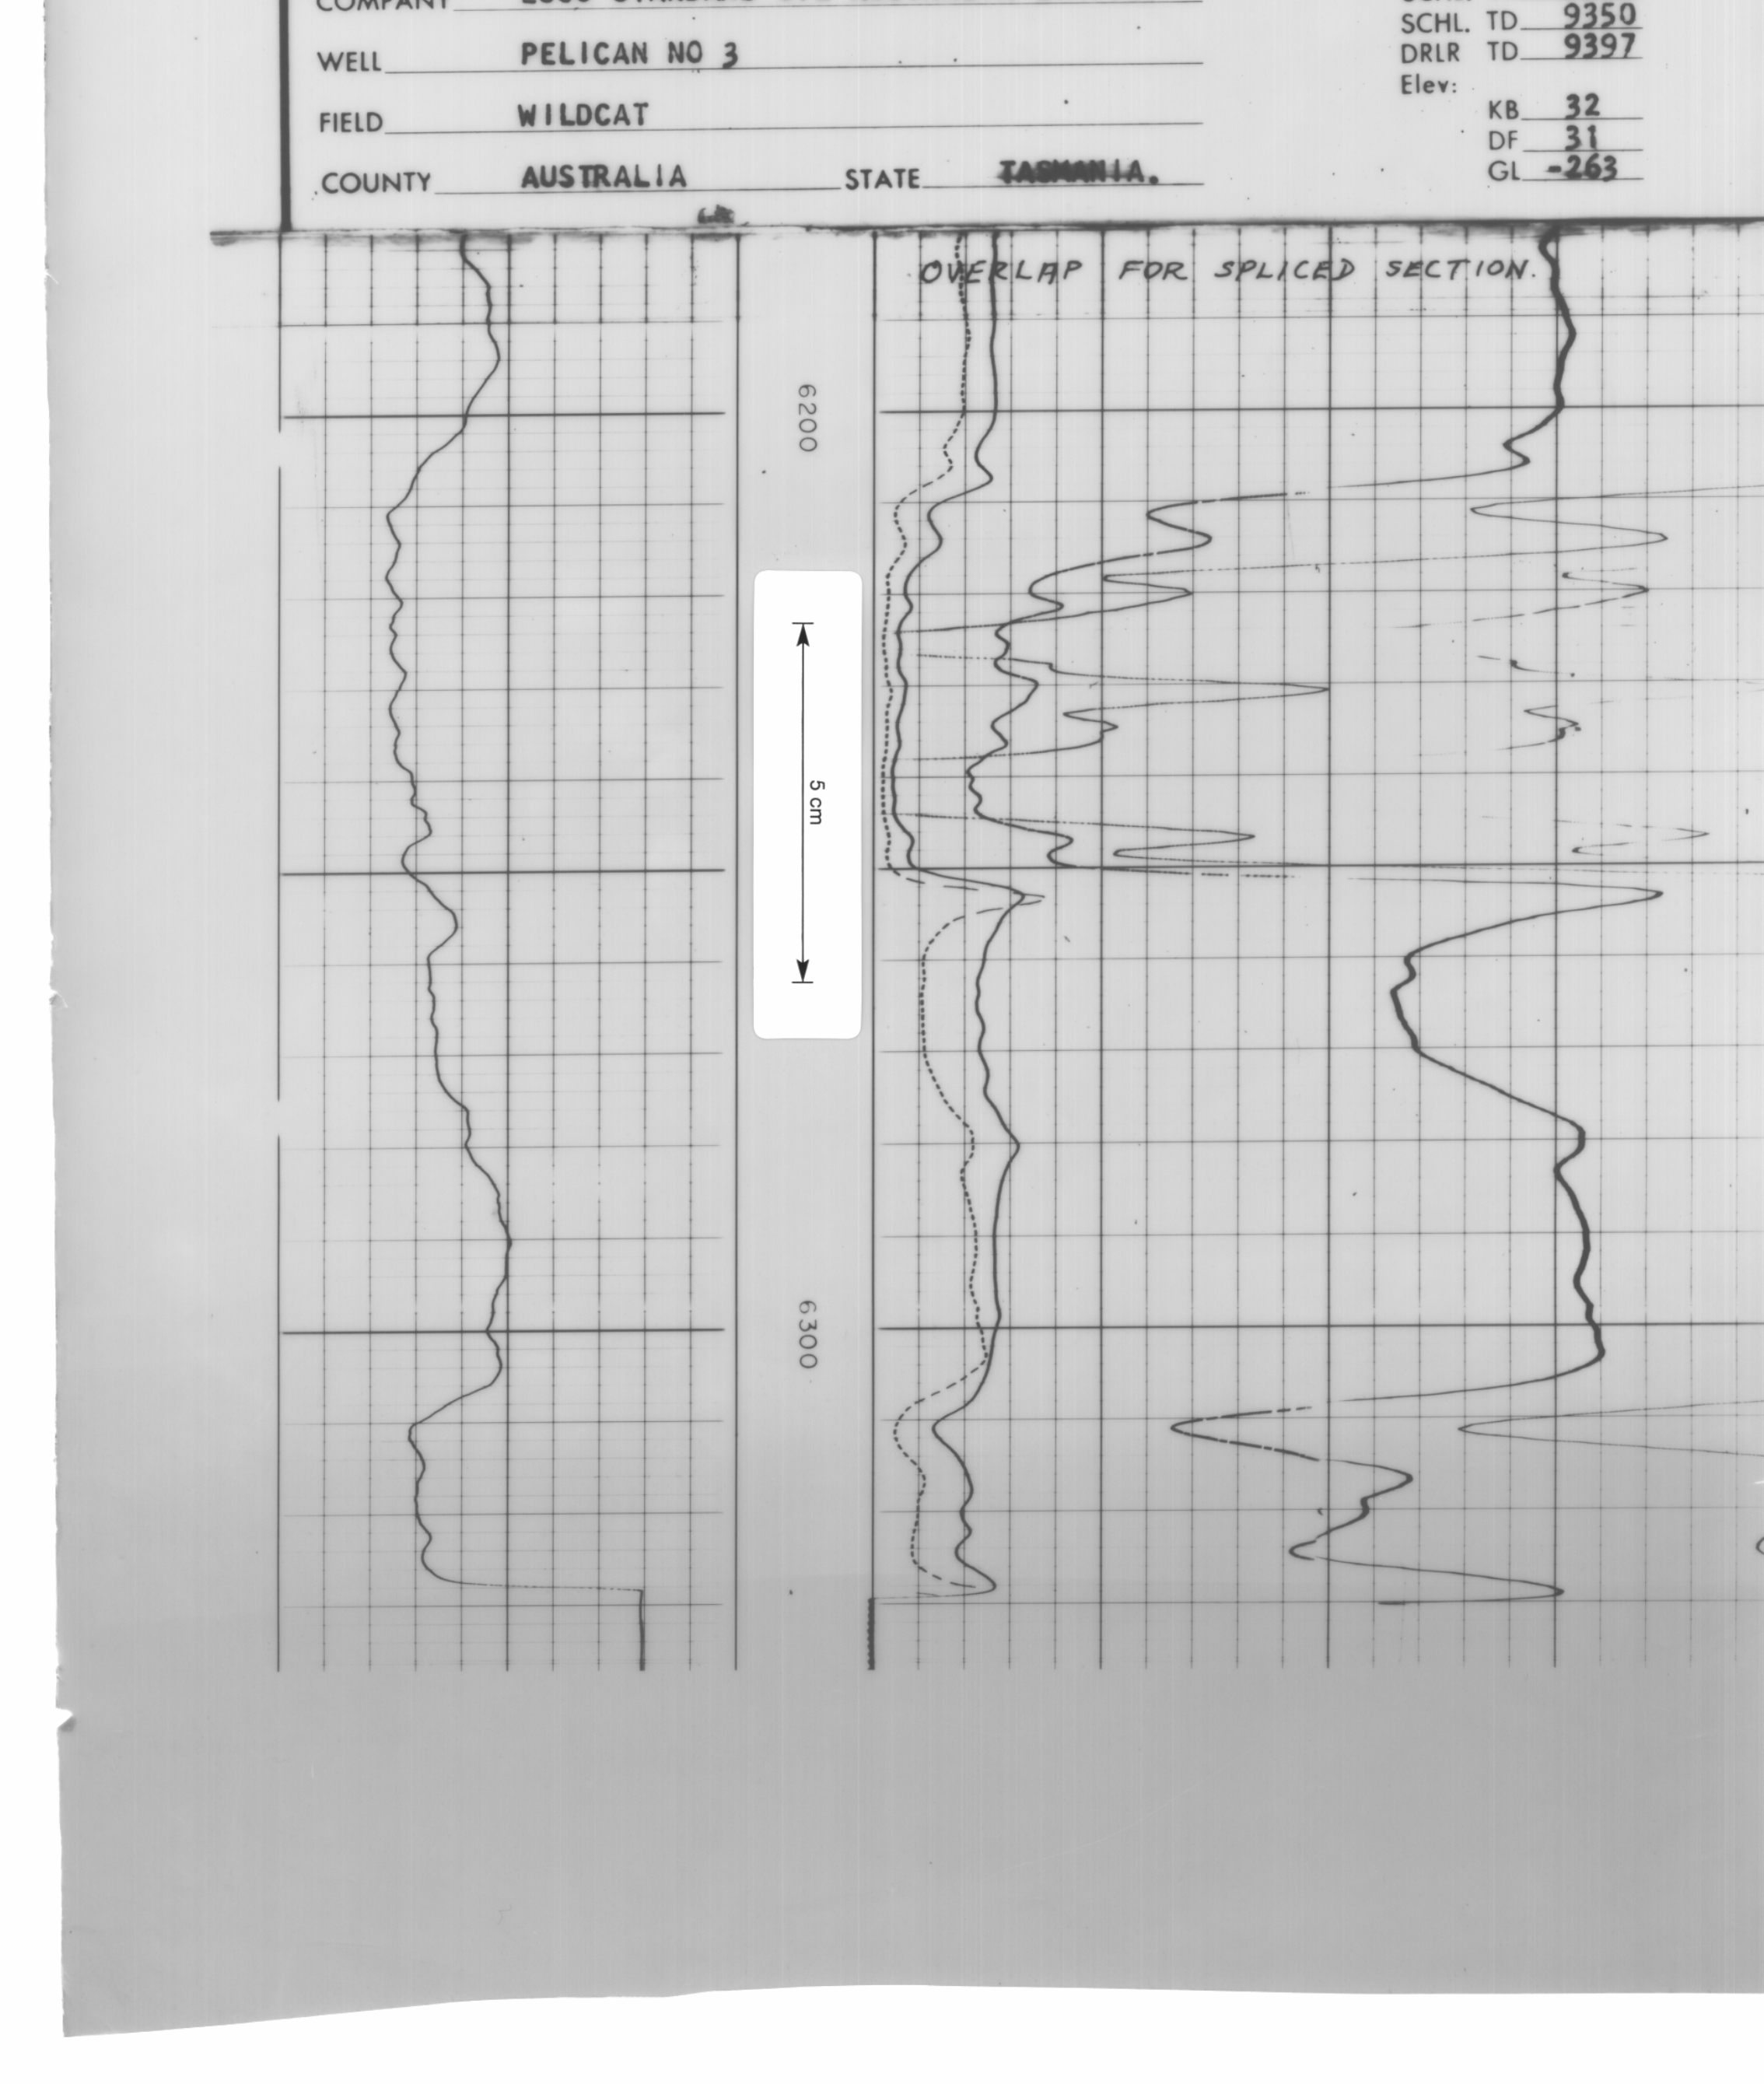OVERLAP FOR SPLICED SECTION