Schlumberger

DST 5A : 2 1/8 ENERJET RUN 01

CSU Field Log

COMPANY:	AMOCO AUSTRALIA PETROLEUM CO.
WELL:	PELICAN #5
FIELD:	WILDCAT
STATE:	TASMANIA
COUNTRY:	AUSTRALIA
LOCATION:	LINE TM4-2740
LATITUDE:	40 20'43.259"S
LONGITUDE:	145 51'49.571"
	RGE:
ELEVATIONS:	KB 21.4 M
	DF 20.4 M
	GL -79.3 M
	MSL
DATE:	8 APR 86
RUN NO:	1
DEPTH-DRILLER:	2857.7 M
DEPTH-LOGGER:	2859.0 M
BTM. LOG INTERVAL:	2855.5 M
TOP LOG INTERVAL:	2000.0 M
CASING-DRILLER:	9 5/8 IN @ 2847 M
CASING-LOGGER:	9 5/8 IN @ 2847 M
BIT SIZE:	8 1/2 IN
TYPE FLUID:	12.5 PPG KCL
DENSITY:	12.5 LB/G
LEVEL:	2000 M
MAX. REC. TEMP:	270.0 DEGF
LOGGING UNIT NO:	822
LOGGING UNIT LOC:	VEA
RECORDED BY:	G HIXON
WITNESSED BY:	J HARKINS

OTHER SERVICES: PL 83

MAX. REC. TEMP: 270.0 DEGF

LOGGING UNIT NO: 822
LOGGING UNIT LOC: VEA
RECORDED BY: G HIXON
WITNESSED BY: J HARKINS

REMARKS:

DEPTH CORRELATED WITH CBL-VDL-GR-CCL RUN 02 (12/02/86)

GUN TYPE: 2 1/8" ENERJET PHASE: ZERO
SHOT DENSITY: 6SPF

DISTANCE CCL TO TOP SHOT: 1.4 MTRS
DISTANCE CCL TO BOT SHOT: 6.9 MTRS
CCL STOPPED AT: 2852.1 MTRS

INTERVAL PERFORATED: 2853.5 TO 2859.0 MTRS

5 cm

EQUIPMENT NUMBERS-

SHM-AA 1772 CCL-L 770 MPD-H 2883

ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATIONS, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFUL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

CP 26.4 FILE 0
DATA ACQUIRED 00- -00 00:00

MRE -17.00	3.0000				
MLE -17.00	3.0000	GS2 -10.00	10.000	0.0	TENS(LB) 2000.0
MDL -17.00	3.0000	GS1 -10.00	10.000	-15.00	CCL 5.0000
		SCALE CHANGES		-15.00	CCL 5.0000
				-17.00	2852 3.0000

SURVEY DURING PERFORATION PASS.

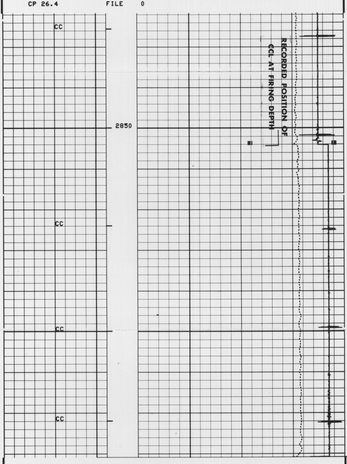

CP 26.4 FILE 0

MRE -17.00	3.0000				
MLE -17.00	3.0000	GS2 -10.00	10.000	0.0	TENS(LB) 2000.0
MDL -17.00	3.0000	GS1 -10.00	10.000	-17.00	CCL 3.0000

SENSOR MEASURE POINT TO TOOL ZERO

CCL 0.0 METER TENS 0.0 METER

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
BS	12.2500	IN	BHS	CASE	

MRE -17.00	3.0000				
MLE -17.00	3.0000	GS2 -10.00	10.000		
MDL -17.00	3.0000	GS1 -10.00	10.000	0.0	TENS(LB) 2000.0
CCL -17.00	3.0000				

SURVEY BEFORE SHOOTING

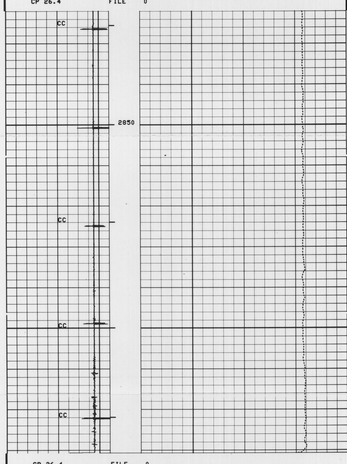

CP 26.4 FILE 0

MRE -17.00	3.0000				
MLE -17.00	3.0000	GS2 -10.00	10.000		
MDL -17.00	3.0000	GS1 -10.00	10.000	0.0	TENS(LB) 2000.0
CCL -17.00	3.0000				

SENSOR MEASURE POINT TO TOOL ZERO

CCL 0.0 METER TENS 0.0 METER

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
BS	12.2500	IN	BHS	CASE	

Schlumberger

DST 5A : 2 1/8 ENERJET RUN 01

CSU Field Log

5 cm