FILE

4

TT (US)		CBL (MV)	
400.0	200.0		
CCL ( )			
-19.00	1.000		
GR (GAPI)			
0.0	150.0	0.0 50.00	200 VDL 1200

SENSOR MEASURE POINT TO TENSION REFERENCE POINT

AMPL	.0	FEET	DT	.0	FEET
SRAT	.0	FEET	CBL	.0	FEET
GR	21.1	FEET	TT	.0	FEET
CCL	24.8	FEET	TENS	.0	FEET
NOIS	-8.3	FEET			

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
CWEI	72.00	LB/F	BS	17.50	IN
DTM	56.00	US/F	CDTS	100.0	
CSIZ	12.37	IN	DTF	189.0	US/F
DO	0.0		BHS	CASE	

TT (US)		CBL (MV)		
400.0	200.0			
CCL ( )		CBL (MV)		
-19.00	1.000	0.0	10.00	
GR (GAPI)		CBL (MV)		
0.0	150.0	0.0	50.00	200 VDL 1200

FILE

3

REPEAT SECTION

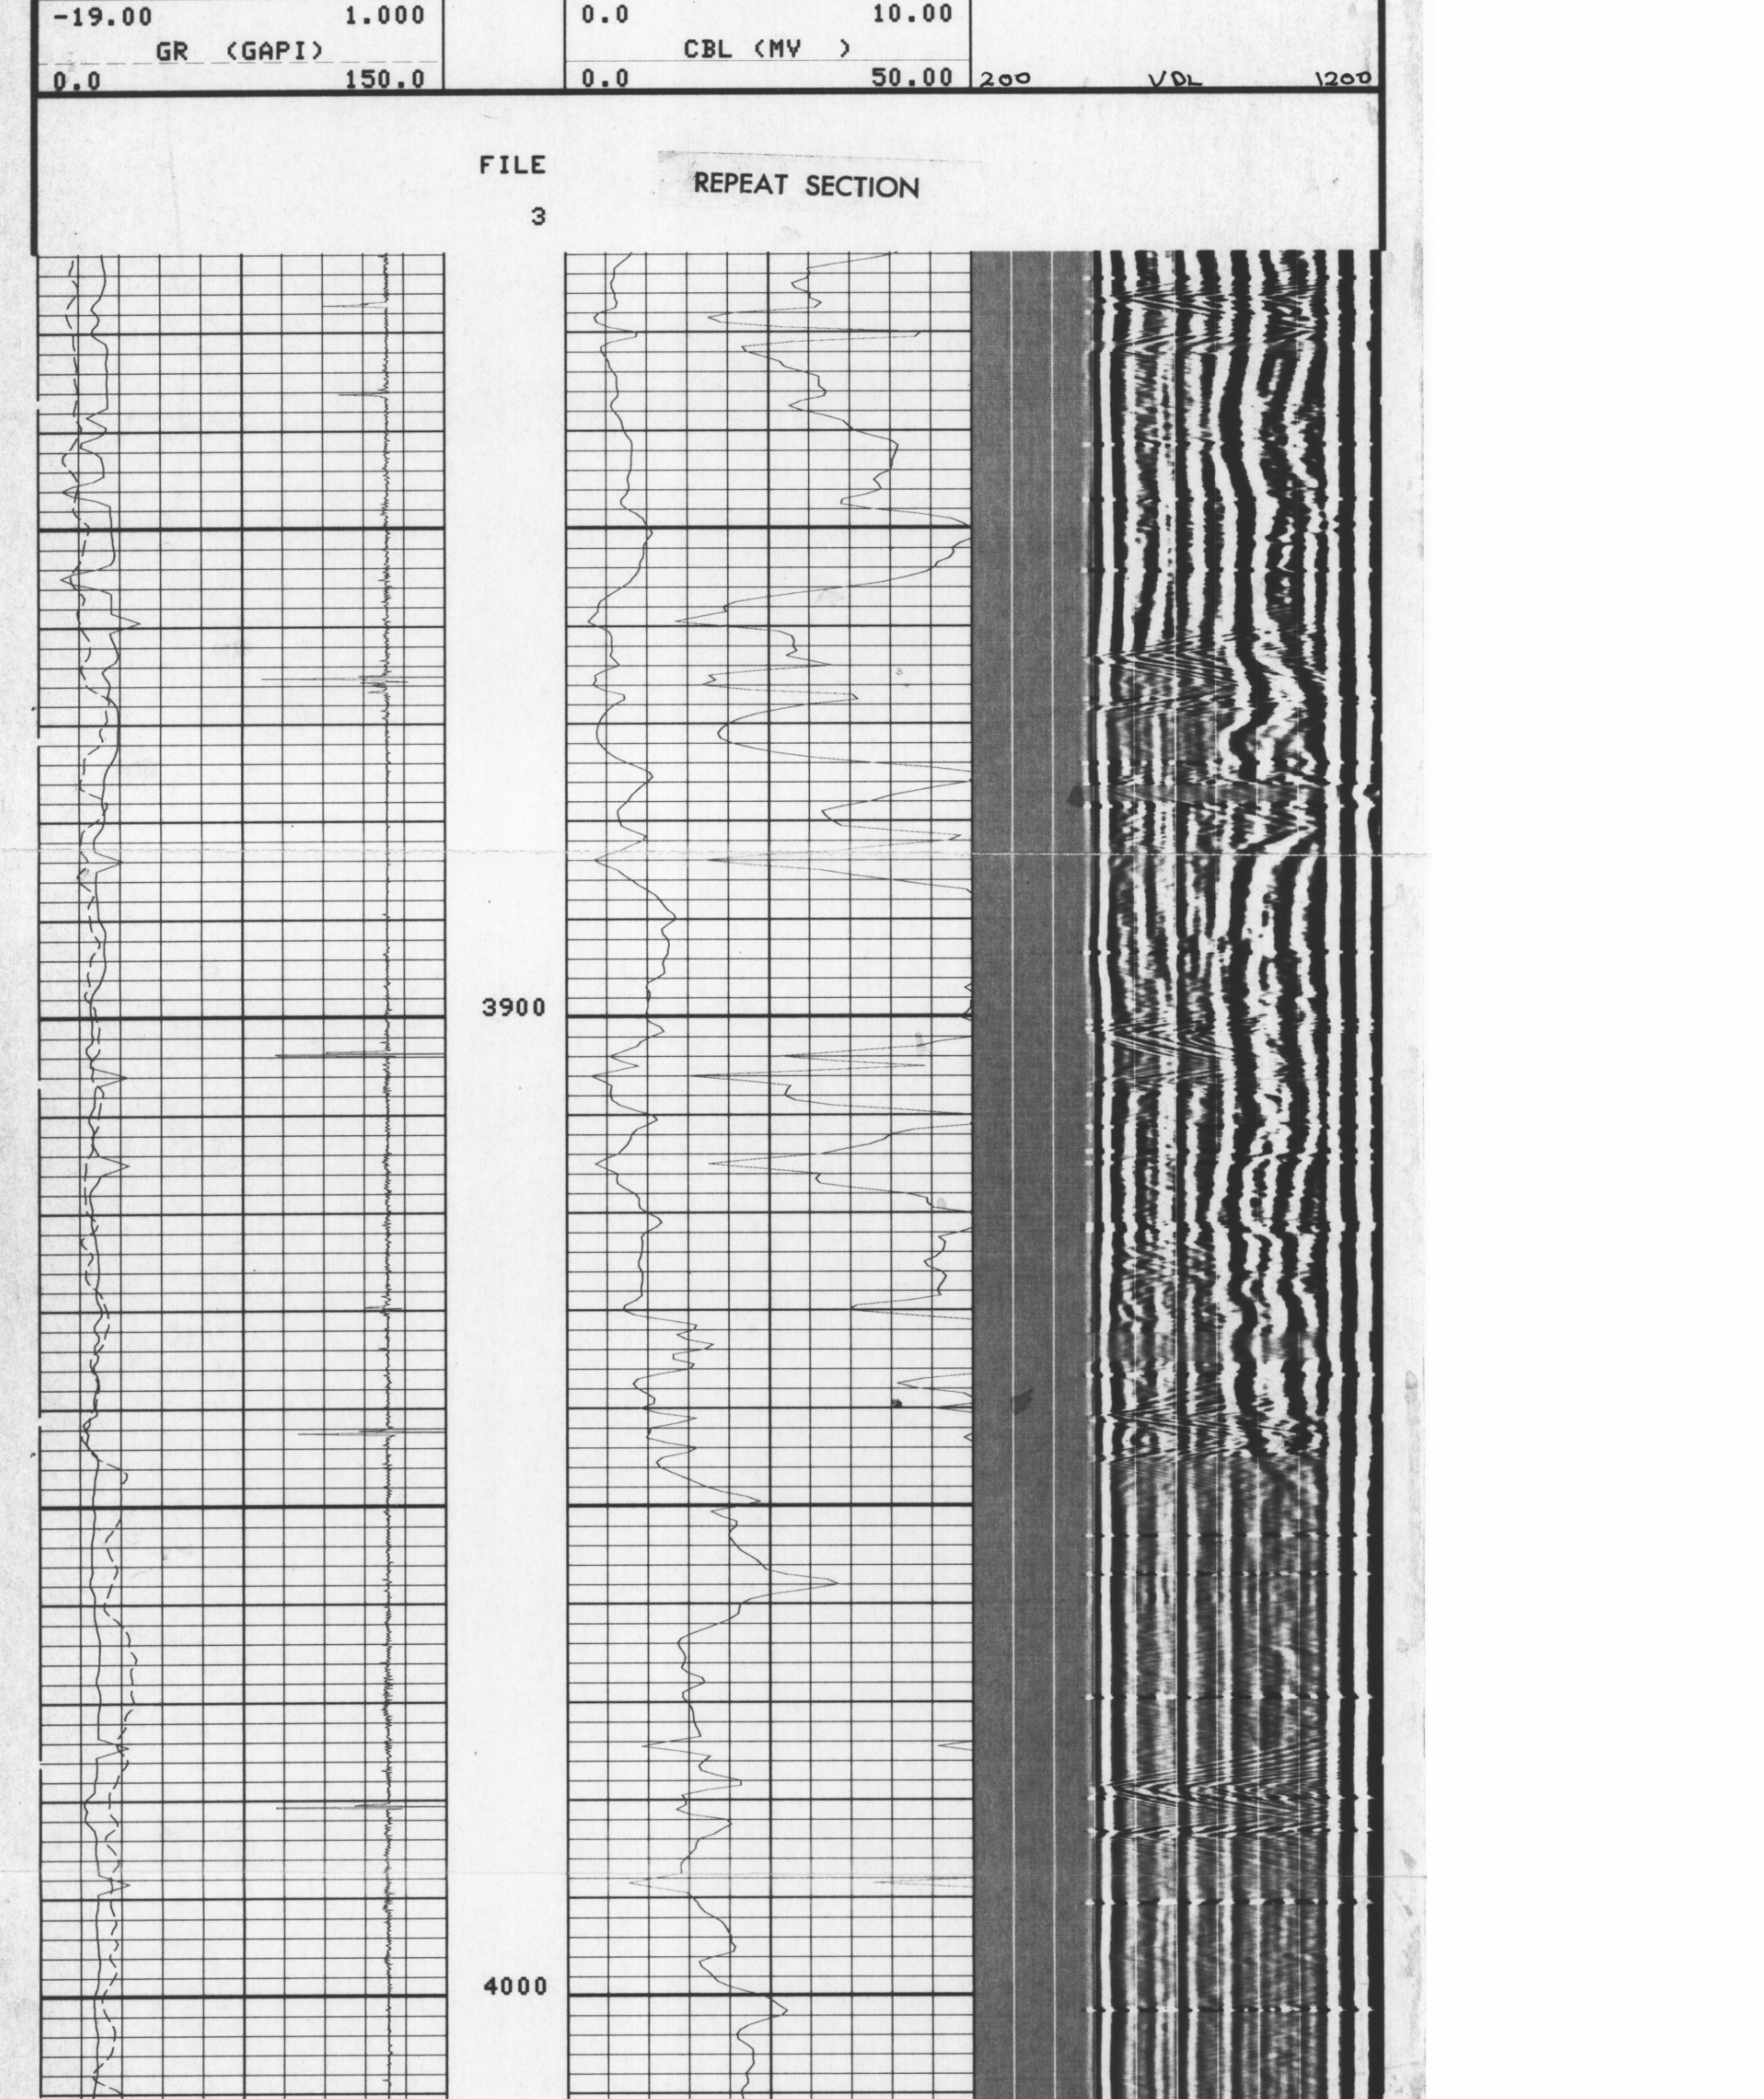

FILE

3

TT (US)		CBL (MV)		
400.0	200.0			
CCL ( )		CBL (MV)		
-19.00	1.000	0.0	10.00	
GR (GAPI)		CBL (MV)		
0.0	150.0	0.0	50.00	200 VDL 1200

SENSOR MEASURE POINT TO TENSION REFERENCE POINT

AMPL	.0	FEET	DT	.0	FEET
SRAT	.0	FEET	CBL	.0	FEET
GR	21.1	FEET	TT	.0	FEET
CCL	24.8	FEET	TENS	.0	FEET
NOIS	-8.3	FEET			

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
CWEI	72.00	LB/F	BS	17.50	IN
DTM	56.00	US/F	CDTS	100.0	
CSIZ	12.37	IN	DTF	189.0	US/F
DO	0.0		BHS	CASE	

BEFORE SURVEY CALIBRATION SUMMARY

PERFORMED: 82/07/26
PROGRAM FILE: ISN2 (VERSION 20.22 81/09/17)

SGTE DETECTOR CALIBRATION SUMMARY

	MEASURED BKGD	MEASURED JIG	CALIBRATED	UNITS
GR	3	154	165	GAPI

FILE

2

5 cm