460132

GAMMA (A) | CHE-DENSITY

DIS-SNC-CAL-GR-SP

COMPANY:	AMOCO AUSTRALIA
WELL:	CAPE GIBBELL NO. 1
FIELD:	WILBORT
STATE:	TASMANIA
COUNTRY:	AUSTRALIA
LOCATION:	SOUTHEAST TASMANIA
TEC:	TGPL
LATITUDE:	148 00 53.30
LONGITUDE:	148 01 47.06
PERMANENT DATUM:	M.S.L.
ELEV. OF PERM. DATUM:	
LOG MEASURED FROM:	KB
DRILL MEASURED FROM:	KB
DATE:	20 JUL 1982
RUN NO:	2

SCHLUMBERGER SERVICES-HOBART

ELEVATIONS:
KB: 25.5 *
DF: 24.5 *
GL: -0.0 *
DF: -0.0 *

FARMIN
WELL NO 1
CAPE GIBBELL
TASMANIA
DRILL TED
ELEV KB 25' DF

DEPTH-DRILLER:	4161.0 *	
DEPTH-LOGGER:	4164.0 *	
BTM LOG INTERVAL:	4160.0 *	
TOP LOG INTERVAL:	1000.0 *	
CASING-DRILLER:	402 *	1000 *
CASING-LOGGER:	400 *	
CASING:	13.3/8 LB/F	72
BIT SIZE:	12.1/4	12.1/4
DENSITY:	98	1.25
DEPTH:	1000 *	4161 *

TYPE FLUID IN HOLE: FRESHWATER GEL
DENSITY: 9.5 LB/G
VISCOSITY: 55.0 S
PH: 10.0
FLUID LOSS: 5.6 CC
SOURCE OF SAMPLE: FLOWLINE
RM @ MT: 1.200 OHMM AT 55.0 DEGF
RMF @ MT: 1.200 OHMM AT 55.0 DEGF
RMC @ MT: 1.200 OHMM AT 55.0 DEGF
SOURCE RMF/RMC: FLOWLINE
RM @ BHT: 0.800 OHMM AT 161. DEGF
RMF @ BHT: 0.800 OHMM AT 161. DEGF
RMC @ BHT: 0.910 OHMM AT 161. DEGF
TIME CIRC. STOPPED: 0100
TIME LOGGER ON STM.: 0715
MAX. REC. TEMP: 161.0 DEGF
LOGGING UNIT NO: 30
LOGGING UNIT LOC: BOP
RECORDED BY: D.GRT
WITNESSED BY: D.BRNETT

REMARKS:
RUN IS NON CALIPER: ASSES ANOMS "YES" IN BRACK TO AID TOOL DESIGN.

EQUIPMENT NUMBERS:

DIS DA 1207	DIS EC 1964	DGC JC 4119	DLS NA 1974
SLC GS 1299	PGM274	MCS DA 1526	ISS 8998

ALL INTERPRETATIONS ARE OPINIONS BASED INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION, AND WE SHALL NOT BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY SUCH INTERPRETATION MADE BY ANY OF ITS OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET FORTH IN OUR CURRENT PRICE SCHEDULE.

FILE 102

		DT (USEC/F)	40.000
		140.00	
		ILM (OHMM)	2000.0
		0.2000	
		ILD (OHMM)	2000.0
		0.2000	
		SFLA(OHMM)	2000.0
		0.2000	
SP (MV)	20.000		
-80.00			
RD (OHMT)	150.00		
0.0			

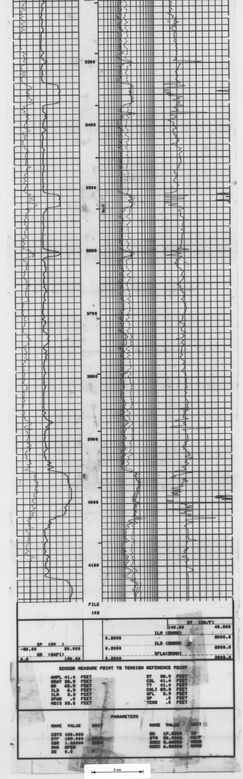

FILE 102

		DT (USEC/F)	40.000
		140.00	
		ILM (OHMM)	2000.0
		0.2000	
		ILD (OHMM)	2000.0
		0.2000	
		SFLA(OHMM)	2000.0
		0.2000	
SP (MV)	20.000		
-80.00			
RD (OHMT)	150.00		
0.0			

SONDE READING FEET TO TENSION REFERENCE POINT

GDPL	41.0 FEET	DT	55.0 FEET
GDAT	55.0 FEET	TN	55.0 FEET
GDTT	55.0 FEET	GR	55.0 FEET
ILD	6.0 FEET	CNLT	55.0 FEET
ILM	6.0 FEET	CPA	55.0 FEET
SFLA	6.0 FEET	TEMP	55.0 FEET
HDTS	55.0 FEET	TENS	.0 FEET

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
CSTD	100.000		DB	17.0000	DEGF
DTF	100.000		DTM	0.00000	DEGF
GN	1.00000	DEGF	DGRD	0.00000	DEGF
DT	0.0000		DGRD	0.00000	DEGF
GN	0.0				