



COMPANY:	AMCO AUSTRALIA	460140	OTHER SERVICES-
WELL:	CAPE SRELL NO. 1		LB-CHL-GR
FIELD:	WILDCAT		HBT
STATE:	TASMANIA		CST
NATION:	AUSTRALIA		
LOCATION:	SOUTHWEST TASMANIA		
SEC:		TMP:	
LATITUDE:	042 00 09.54 S		
LONGITUDE:	145 01 47.06 E		
PERMANENT DATUM:	NSL	ELEVATIONS-	PROGRAM
ELEV. OF PERM. DATUM:	KB	KB: 72.0'	TAPE NO:
LOG MEASURED FROM:	KB	DF: 71.0'	20.2
DRLG. MEASURED FROM:	KB	GL: -309.0'	SERVICE
			ORDER NO:
			SEA0901
DATE:	3 SEP 82		
RUN NO:	4		

DEPTH-DRILLER:	11570.0'		
DEPTH-LOGGER:	11560.0'		
BTN. LOG INTERVAL:	11556.0'		
TOP LOG INTERVAL:	8990.0'		
CASING-DRILLER:	1393'	4144'	9002'
CASING-LOGGER:	1393'	4140'	8996'
CASING:	20	13.37	9.6
WEIGHT:	133.0 LB/F	60.00 LB/F	47.00 LB/F
BIT SIZE:	20	12.25	8.5
DEPTH:	4161'	9033'	11576'

TYPE FLUID IN HOLE: FRESHWATER GEL
 DENSITY: 9.6 LB/G
 VISCOSITY: 49.0 S
 PH: 10.0
 FLUID LOSS: 6.0 CC
 SOURCE OF SAMPLE: FLDLINE
 RH: 1.670 DMM AT 60.0 DF
 RHF: 1.030 DMM AT 60.0 DF
 RHC: 1.950 DMM AT 60.0 DF
 SOURCE RHF/RHC: PRESS PRESS
 RH AT BHT: 0.579 DMM AT 106. DF
 RHC AT BHT: 0.676 DMM AT 106. DF
 TIME CIRC. STOPPED: 2000
 TIME LOGGER ON BTH: 0400
 MAX. REC. TEMP: 106.0 DF
 LOGGING UNIT NO: 33
 LOGGING UNIT LOC: SE
 RECORDED BY: M GDH
 WITNESSED BY: M BRYANT

REMARKS: 5 cm

EQUIPMENT NUMBERS-


DIC DA 1297 DIS EC 1364 SGC JC 4119 SLC KB 1959
 NSM B743 IEN 0995 SLS SC 317

ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT, AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATIONS, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFUL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

FILE

SP (MV)	20.00	BT (US/F)	50.00
GR (GAPI)	150.0	BT (US/F)	50.00
		TENS(LB)	13000.
		ILM (DMM)	2000.
		ILB (DMM)	2000.
		SFLA(DMM)	2000.

FILE 3

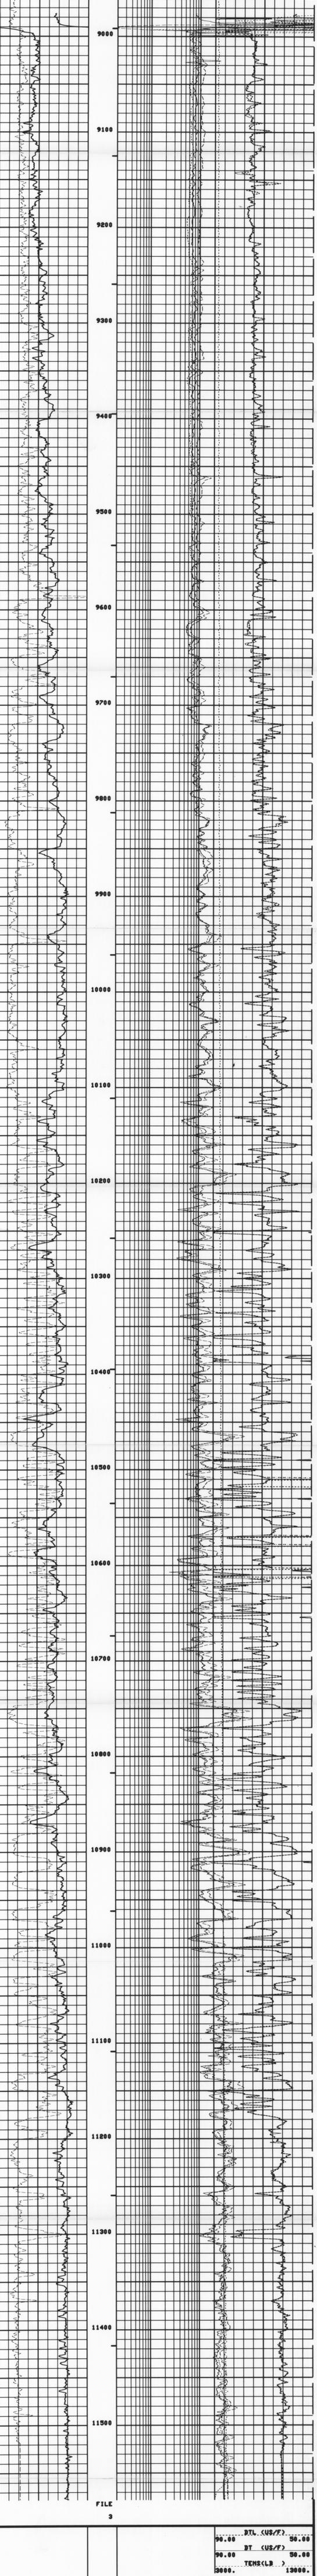

FILE 3

SP (MV)	20.00	BT (US/F)	50.00
GR (GAPI)	150.0	BT (US/F)	50.00
		TENS(LB)	13000.
		ILM (DMM)	2000.
		ILB (DMM)	2000.
		SFLA(DMM)	2000.

SENSOR MEASURE POINT TO TENSION REFERENCE POINT

CBL	34.6 FEET	ANPL	34.6 FEET
TT1	39.0 FEET	SRAT	43.2 FEET
TT3	38.0 FEET	TT2	38.0 FEET
GR	59.6 FEET	TT4	37.0 FEET
SFL	3.9 FEET	ILB	6.9 FEET
SP	.0 FEET	ILM	3.3 FEET
TENS	.0 FEET	SPAR	.0 FEET
NOIS	26.3 FEET		

PARAMETERS

NAME	VALUE	UNIT	NAME	VALUE	UNIT
ITTS	BT		BS	0.500	IN
BTH	50.00	US/F	CBTS	100.0	
BSEC	5.600	MMD	BYF	109.0	US/F
HSEC	6.800	MMD	SBR	1.000	DMM
FNUM	0.0100		FPHI	SPMT	
DD	0.0		BMS	OPEN	



5 cm