SCHLUMBERGER

INDUCTION-ELECTRICAL LOG

COMPANY: ESSO EXPLORATION AUST. INC.

WELL: BASS 1

FIELD: WESTGATE

COUNTY: AUSTRALIA STATE: TAS.

Permanent Datum:	G.L.
Log Measured From:	K.B. 25 Ft. Above Perm. Datum
Drilling Measured From:	K.B.

Date	1-3-69	1-3-69	
Run No.	1	1	
Depth-Driller	1	1	
Depth-Logger	1	1	
Bottom Log Interval	1	1	
Top Log Interval	1	1	
Casing-Driller	1	1	
Casing-Logger	1	1	
Bit Size	1	1	
Type Fluid in Hole	1	1	
Dens.	1	1	
Visc.	1	1	
pH	1	1	
Fluid Loss	1	1	
Source of Sample	1	1	
Rm @ Meas. Temp.	1	1	
Rmf @ Meas. Temp.	1	1	
Rmc @ Meas. Temp.	1	1	
Source Rmf / Rmc	1	1	
Rm @ BHT	1	1	
Time Since Circ.	1	1	
Max. Rec. Temp.	1	1	
Equip. Location	1	1	
Recorded By	1	1	
Witnessed By	1	1	

Run No.	1
Depth-Driller	1
Depth-Logger	1
Bottom Log Interval	1
Top Log Interval	1
Casing-Driller	1
Casing-Logger	1
Bit Size	1
Type Fluid in Hole	1
Dens.	1
Visc.	1
pH	1
Fluid Loss	1
Source of Sample	1
Rm @ Meas. Temp.	1
Rmf @ Meas. Temp.	1
Rmc @ Meas. Temp.	1
Source Rmf / Rmc	1
Rm @ BHT	1
Time Since Circ.	1
Max. Rec. Temp.	1
Equip. Location	1
Recorded By	1
Witnessed By	1

REMARKS: Bare Compensating Series used. Hind 25mph. Tapes 6-5"

5 cm

RECORDING DATA		EQUIPMENT DATA	
Run No.	1	Run No.	1
Size of Speed	20" 20	Panel	3120-A 390
A. M. Setting	50"	Cartridge	3120-AF 342
Gain Setting	5.0"	Cell	3120-AF 203
S. P.	5 mm	Cell Size	3120-AF 203

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms · m²/m	CONDUCTIVITY millimhos · m²/m (CF10 / ohm · m²)
10		16" NORMAL: 1 — 4 (2000); INDUCTION: 1 — 10 (4000)	INDUCTION: 0 — 50 (2000)
		INDUCTION: 1 — 10	
		16" NORMAL: 1	INDUCTION: 1

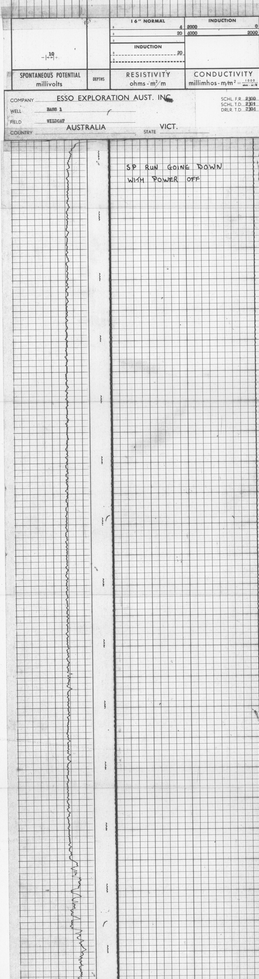

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms · m²/m	CONDUCTIVITY millimhos · m²/m (CF10 / ohm · m²)
10		16" NORMAL: 1 — 4 (2000); INDUCTION: 1 — 10 (4000)	INDUCTION: 0 — 50 (2000)
		INDUCTION: 1 — 10	

COMPANY: ESSO EXPLORATION AUST. INC.

WELL: BASS 1

FIELD: WESTGATE

COUNTRY: AUSTRALIA STATE: VICT.

SCHL. F.R. 2000
SCHL. T.D. 2301
DRLR. T.D. 2301

S.P. RUN GOING DOWN WITH POWER OFF.

5 cm