


ADIT NO. 2 Main Drive									
m	Cu	Pb	Zn	Ag	S%	Mn	Au	Ag	
0-10	960	20	130	-	0.2	300	-	0.2	
10-20	830	30	70	-	-	160	-	0.4	
20-30	480	30	80	-	0.1	220	-	0.1	
30-40	980	30	140	-	1.9	290	-	0.3	
40-50	250	10	70	-	0.1	330	-	-	
50-60	310	110	80	-	0.4	410	-	0.1	
60-62	370	80	80	-	0.5	470	-	0.3	
62-64	310	40	120	-	0.9	2200	-	0.4	
64-66	760	20	120	-	0.7	1600	-	0.2	
66-68	2200	20	110	-	1.1	1700	-	0.6	
68-70	900	20	100	-	0.5	1800	-	0.2	
70-80	1700	30	100	-	0.5	2100	-	0.3	
80-88	320	10	80	-	0.6	2100	-	-	
88-90	1750	20	90	-	2.6	2700	-	0.4	
90-100	150	20	90	-	0.2	1300	-	-	
100-110	470	10	90	-	-	1000	-	-	
110-120	300	-	50	-	-	700	-	-	
120-130	680	10	100	-	0.2	640	-	0.1	
130-140	590	20	80	-	-	500	-	-	
140-150	620	20	130	-	0.5	940	-	0.2	
150-152	520	20	120	-	0.1	950	-	-	
152-154	4800	20	140	-	0.4	780	-	0.3	
154-156	800	10	110	-	0.5	610	-	0.2	
156-158	1000	40	110	-	0.1	890	-	-	
158-160	2.40%	7000	400	35	3.2	3300	1.7	2.9	
160-162	1700	20	90	-	0.7	740	-	0.5	
162-164	0.54%	20	100	3	1.0	1200	0.3	2.3	
164-166	890	30	150	2	0.2	850	-	0.8	
166-168	970	30	190	0.2	1300	-	0.3	-	
168-170	700	10	120	-	0.4	1600	-	0.1	
170-172	600	20	120	-	0.1	1150	-	0.1	
172-174	1.00%	120	220	12	1.3	22000	3.4	9.0	
174-176	4900	40	190	6	2.0	12000	1.1	3.3	
176-178	2400	60	220	4	0.4	15000	0.2	1.3	
178-180	370	40	180	-	0.7	3600	-	-	
180-190	750	20	110	-	0.4	2200	-	-	
190-196	830	30	130	-	0.3	1300	-	0.1	

S.E. Cross Cut									
m	Cu	Pb	Zn	Ag	S%	Mn	Au	Ag	
0-2	2100	70	90	3	1.0	1300	0.3	2.6	
2-4	5.68%	1900	3800	55	5.7	1600	2.3	58.0	
4-6	1.52%	450	230	12	1.6	860	1.0	9.2	
6-8	3900	250	150	4	0.7	1400	0.6	2.0	
8-10	3800	250	190	6	0.6	560	0.2	3.6	
10-12	0.60%	120	180	4	0.9	1450	0.2	2.5	
12-14	4400	230	100	4	0.8	400	-	-	
14-16	1100	30	130	-	0.4	950	-	0.3	
16-18	1100	10	150	-	0.2	920	-	-	
18-20	480	20	130	-	0.2	1100	-	-	
20-22	0.56%	-	140	2	0.7	1500	-	0.6	
22-23.5	430	-	140	-	0.2	1150	-	-	

ADIT NO. 1									
m	Cu	Pb	Zn	S%	Mn	Au	Ag		
0-1	0.42%	70	210	0.5	460	0.6	1.7		
1-2	0.88%	40	150	0.5	420	0.4	4.0		
2-3	1.10%	50	160	0.4	500	1.5	6.8		
3-4	0.48%	40	180	0.3	590	0.3	1.8		
4-5	0.70%	70	200	0.6	620	1.3	3.0		
5-6	0.92%	80	200	0.8	600	1.1	3.1		
6-7	0.80%	60	180	0.8	520	0.9	3.1		
7-8	1.16%	80	230	1.0	650	0.5	4.7		
8-9	0.22%	50	230	0.9	670	0.5	1.5		
9-10	0.12%	50	220	0.4	680	-	0.3		
10-12	0.10%	40	170	0.3	910	-	0.5		
12-14	820	30	120	0.3	450	-	-		
14-16	230	20	90	0.1	350	-	-		
16-18	240	30	90	0.3	370	-	-		
18-20	330	40	80	0.6	370	-	-		
20-22	350	110	90	-	340	-	0.2		
22-24	230	20	90	0.2	610	-	-		
24-26	240	40	100	-	1150	-	-		
26-28	1050	30	160	0.2	1500	-	0.2		
28-30	420	20	60	-	170	-	-		
30-32	560	20	60	-	160	-	-		
32-34	130	30	70	-	160	-	-		
34-36	570	60	90	-	230	-	0.8		
36-38	250	90	90	-	280	-	0.5		
38-40	370	60	90	0.3	310	-	0.4		
40-42	380	50	70	0.2	280	-	0.3		
42-44	500	50	80	0.2	360	-	0.2		
44-46	540	100	70	0.1	310	0.2	0.5		
46-48	990	100	80	0.2	590	-	0.8		
48-50	730	100	70	0.3	330	-	0.4		
50-52	200	50	60	-	500	-	0.1		

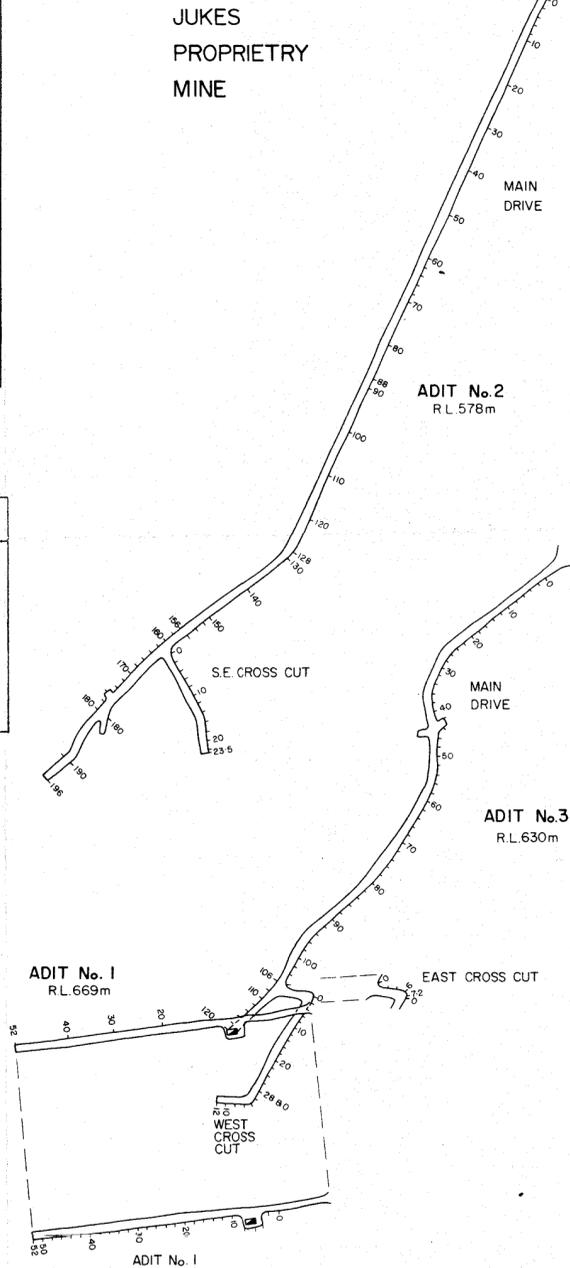

ADIT NO. 3 Main Drive									
m	Cu	Pb	Zn	S%	Mn	Fire Assay Au	Ag		
0.2	2400	60	150	-	250	-	0.5		
2.4	2400	40	150	0.3	180	-	0.4		
4.6	2500	30	160	-	300	-	0.4		
6.8	2600	30	180	0.5	380	-	0.6		
8-10	2000	30	200	0.6	570	-	0.3		
10-12	2900	20	170	0.5	650	-	0.3		
12-14	4000	30	200	0.5	1000	-	0.4		
14-16	3800	20	200	0.6	770	-	0.3		
16-18	0.82%	20	180	0.5	570	0.2	0.7		
18-20	0.62%	20	170	0.2	480	0.1	1.7		
20-22	3000	30	180	-	500	-	0.8		
22-24	2500	20	140	0.5	300	0.3	1.1		
24-26	1.38%	30	220	0.8	530	0.7	4.6		
26-28	2.70%	50	240	0.5	630	2.0	14.1		
28-30	0.72%	30	200	0.5	460	0.4	3.6		
30-32	2800	30	190	0.9	450	0.2	1.7		
32-34	1.00%	30	240	0.6	630	1.1	3.4		
34-36	0.80%	30	230	0.4	530	0.5	1.7		
36-38	0.72%	20	180	0.2	460	0.1	1.5		
38-40	3000	20	200	0.1	460	-	0.8		
40-42	1.40%	30	150	0.5	300	0.8	2.7		
42-44	0.92%	40	100	0.4	220	0.2	1.9		
44-46	2800	50	80	-	160	0.4	1.8		
46-48	1700	60	30	-	50	0.3	2.1		
48-50	0.60%	40	30	0.1	640	0.2	0.7		
50.52.5	1500	60	40	0.4	2400	-	-		
52.5.54	330	150	30	-	410	-	0.2		
54-56	170	360	30	-	400	2.0	1.0		
56-58	620	100	30	-	520	-	0.1		
58-60	100	80	20	-	250	-	-		
60-62	90	160	20	-	600	0.2	0.2		
62-64	380	350	40	-	1100	-	-		
64-66	90	230	30	-	900	-	0.1		
66-68	80	110	40	-	1100	-	-		
68-70	90	100	30	-	1500	-	0.1		
70-72	NOT ASSAYED								
72-74	50	20	20	-	1800	-	-		
74-76	350	60	50	-	1300	0.1	0.5		
76-78	900	120	80	0.2	780	-	0.7		
78-80	300	150	60	0.4	430	-	2.0		
80-82	0.74%	180	80	0.4	5400	0.1	2.3		
82-84	1.10%	900	570	1.2	5400	0.3	13.5		
84-86	0.72%	70	130	0.9	7000	0.1	11.6		
86-88	0.98%	50	90	0.8	8400	0.4	1.7		
88-90	1.88%	40	100	1.6	11800	0.4	3.1		
90-92	0.82%	40	110	1.2	8400	0.3	1.3		
92-94	1.10%	40	160	0.9	1700	0.2	1.7		
94-96	4100	50	200	0.6	840	0.2	1.3		
96-98	0.92%	60	200	0.7	1500	0.3	3.2		
98-100	0.80%	60	210	0.3	700	0.4	3.6		
100-102	3200%	50	200	0.5	960	0.4	1.2		
102-104	1.10%	50	190	1.1	2000	0.8	3.6		
104-106	1.28%	60	220	1.4	1800	0.5	3.9		
106-108	1.54%	90	210	1.7	2500	4.6	7.0		
108-110	1.28%	80	210	1.0	3800	0.7	4.1		
110-112	0.78%	60	210	1.0	1800	0.5	1.6		
112-114	3600	60	250	0.3	3000	0.1	1.1		
114-116	0.90%	70	210	1.0	880	1.3	3.0		
116-118	1700	40	220	0.2	900	-	0.3		
180-120	900	30	170	-	850	-	0.2		

EAST CROSS CUT									
m	Cu	Pb	Zn	S%	Mn	Au	Ag		
0-2	1.47%	20	190	1.3	4200	0.6	2.6		
2-4	1.04%	20	170	0.9	4000	0.7	2.1		
4-6	1.06%	30	100	1.1	7000	1.6	3.0		
6-7	2.11%	110	130	1.9	7600	0.9	5.9		

WEST WALL HANGING WALL DRIVE									
m	Cu	Pb	Zn	S%	Mn	Au	Ag		
0-2	NOT ASSAYED								
2-4	0.96%	60	110	1.1	6800	0.2	2.3		
4-6	3.76%	100	180	3.7	7800	5.0	11.4		
6-8	1.85%	140	210	1.4	8600	2.2	6.7		
8-10	1.34%	70	270	1.2	5200	0.3	2.9		
10-12	0.76%	60	200	0.6					