C1, C2, D Lens ORE RESOURCE
30 AUG 77
0374_1482

C_1 Lens West TONNES	C_1 Lens Main TONNES
1,010	3,430
7,290	11,680
10,460	11,860
9,090	21,510
11,740	45,840
9,780	49,830
11,620	56,760
12,430	42,050
4,510	42,190
1,940	46,890
1,770	25,860
2,730	20,790
1,240	14,280
—	4,160
—	—
—	—
85,600 TOTAL	TOTAL 397,100

C_1 LENS

C_1 LENS MAIN 397,100 TONNES at 0·84 % WO_3
C_1 LENS WEST 85,600 TONNES at 0·78 % WO_3

TOTAL C_1 LENS PROBABLE RESOURCE: 482,700 TONNES at 0·83 % WO_3
POSSIBLE ORE: 15,000 TONNES

C_2 Lens West TONNES	C_2 Lens Main TONNES
2,600	3,080
11,730	26,720
14,340	35,040
7,500	41,610
1,120	37,850
6,800	28,490
14,350	44,070
14,510	46,820
14,090	17,450
6,220	6,770
2,190	4,830
—	5,860
—	8,710
—	3,190
—	—
—	—
95,400 TOTAL	TOTAL 310,500

C_2 LENS

C_2 LENS MAIN 310,500 TONNES at 1·04 % WO_3
C_2 LENS WEST 95,400 TONNES at 0·85 % WO_3

TOTAL C_2 LENS PROBABLE RESOURCE: 405,900 TONNES at 1·00 % WO_3
POSSIBLE ORE: 10,000 TONNES

D Lens West TONNES	D Lens Main TONNES
—	—
—	—
—	37,290
—	17,300
—	6,440
—	4,580
—	—
—	—
—	—
—	—
—	—
—	—
—	—
—	—
— TOTAL	TOTAL 65,600

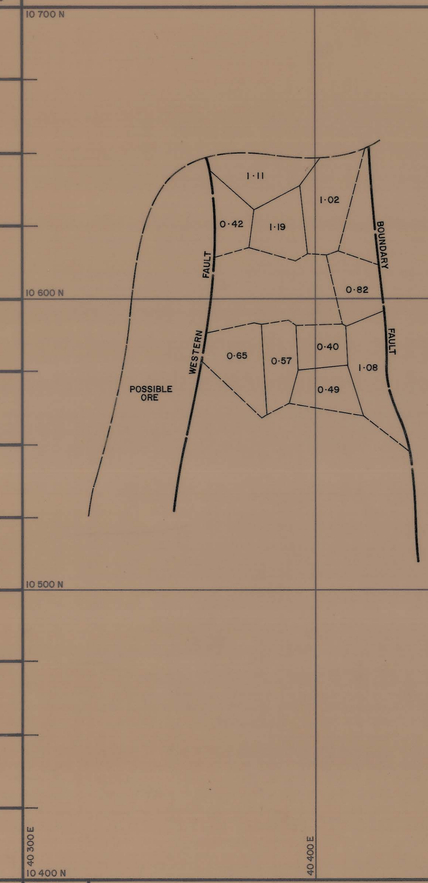

D LENS

PROBABLE RESOURCE: 65,600 TONNES at 0·93 % WO_3
POSSIBLE ORE: 10,000 TONNES

0374_1482
5 cm

NOTE:
1. RESOURCE AS AT 30 AUG 77

DATE: 30 AUG 77
GEOLOGIST: S.G.S.
DRAWN: R.K
CHECKED: M.C.R.

GEOPEKO LIMITED
KING ISLAND GROUP
SCALE: 1:1000
No. K

BOLD HEAD OREBODY
ORE RESOURCE TABLES
C_1, C_2, and D LENS