

1983/44. A FORTRAN program for plotting areally distributed gravity (or other) data (Revision 1).

R.G. Richardson

Abstract

This program plots sample points, the data value, and the reading number for data on a metric grid in the range 0 to 1000 km east and north. The plotting scale is specified when the program is run.

THE PROGRAM

STNPLT (Appendix 1)

This program was written for plotting gravity data, but any data in a suitable format can be plotted. The program reads the search parameters and plotting options from logical unit 5 and the data from logical unit 4. A listing of the data values actually plotted is output on logical unit 6 and the statistics of the search are output on logical unit 7. Details of the plotting routines may be found in Richardson (1983).

Control data read from logical unit 5 is:

XMIN - the western boundary of the data (km)
XMAX - the eastern boundary of the data (km)
YMIN - the southern boundary of the data (km)
YMAX - the northern boundary of the data (km)
SCALE - the plotting scale, e.g. 50 000

The labelling used depends on the value of SCALE.

- (a) SCALE >100 000
label each multiple of 10 km
draw a line parallel to the prime axes at each multiple of 100 km
- (b) 25 000 <SCALE ≤100 000
label each 1 km
draw a line parallel to the prime axes at each multiple of 10 km
- (c) 5000 <SCALE ≤25 000
label each 250 m
draw a line parallel to the prime axes each 1 km
- (d) 2000 <SCALE ≤5000
label each 100 m
draw a line parallel to the prime axes each multiple of 500 m
- (e) SCALE ≤2000
draw a line parallel to the prime axes each multiple of 100 m

If SCALE is such that the map will not plot on the paper width, the ranges and scale may be altered.

IPLCE - the number of decimal places to use for data values written on the plots.

AOK - Y if reduced size symbols are required for close data points, N otherwise.

TITLE - the title for the plot followed by &.

IOPT - select the functions desired from the program.

- (a) IOPT = 1
plot symbols only at the data points
- (b) IOPT = 2
plot a symbol at each data point and a circle representing the maximum acceptable deviation from the nominal data point. The X and Y separations (XSP, YSP) of the nominal points and the acceptable distance from the nominal point are read. Starting at (XMIN, YMIN) circles are drawn at intervals XSP, YSP until (XMAX, YMAX) is reached. This is a very slow process.
- (c) IOPT = 3
plot symbols at the data points and write the data point numbers.
- (d) IOPT = 4
plot symbols at the data points and write the data values.
- (e) IOPT = 5
plot symbols at the data points and write both the data point numbers and the data values.

AOK - Y if more plots to follow, N otherwise.

Data input from logical unit 4 is:

SURVNO, STATNO, X, Y, BA - format (I5, 1X, I4, 2F9.1, 36X, F8.2)

SURVNO (optional) - up to 14 different survey numbers may be used. A different data point symbol is used for each survey number.

STATNO - the data point number.

X, Y - the east and north co-ordinates of the data point in metres (X, Y in the range 0.0 to 700 000).

BA - the data value.

A summary of the data plotted is output on logical unit 6. The total number of data points in the file on logical unit 4 and the number of points plotted are printed on logical unit 7.

Appendices 2 to 8 show the plotted output of the same set of data for the following control inputs:

3/20

<i>Appendix</i>	<i>XMIN</i>	<i>XMAX</i>	<i>YMIN</i>	<i>YMAX</i>	<i>SCALE</i>	<i>IPLCE</i>	<i>SMALL SYMBOL</i>	<i>IOPT</i>
2	500.5	520.5	294.5	322.5	250 000	0	Y	1
3	500.5	514.5	294.5	312.5	100 000	0	N	3
4	500.5	506.5	294.5	305.5	50 000	1	N	4
5	500.5	503.5	294.5	298.5	25 000	1	N	5
6	500.9	502.2	294.9	296.1	5 000	1	N	5
7	500.9	501.3	294.8	295.3	2 500	1	N	5
8	500.9	501.1	294.8	295.1	2 000	1	N	5

REFERENCE

RICHARDSON, R.G. 1983. Hard copy plotting on the Geological Survey mini-computer. *Unpubl.Rep.Dep.Mines Tasm.* 1983/38.

[9 September 1983]

4/20

APPENDIX 1

Program STNPLT

```

$TITL GRAVITY STATION PLOT
C STNPLT, STNPLJ
C PLOTS GRAVITY STATION NUMBERS AND B. A. AT THE STATION LOCATION
C USES A DIFFERENT SYMBOL FOR UP TO 14 SURVEYS.
C ASSUMES COORDINATES ARE IN KM.
C GRAVITY DATA ON LU 4
C CONTROL LU 5
C LIST OF STATIONS ON LU 6
C NUMBER OF STATIONS LU 7
  REAL SCALE, FACT, BA, X, Y,
  . YMXLST, ERRRAD, XBOT, YBOT, YMXPLT, YTMP
  DOUBLE PRECISION XMIN, XMAX, YMIN, YMAX
  INTEGER*4 IXMIN, IXMAX, IYMIN, IYMAX, SPCE, DFACT, TXSP, DX, DY,
  . IFXMIN, IFXMAX, IFYMIN, IFYMAX, XSP, YSP
  INTEGER*2 NSURV, SURVEY(50), TITLE(40),
  . IOPT, I, SURVNO, STATNO, NTOT, NPLOT, YES, NO, AOK, AR, AS
  LOGICAL SURV, IER, LINE, LABEL, METRES
  DATA YES/1HY/, NO/1HN/, AR/1HR/, AS/1HS/
  OPEN(UNIT=5, FILE='CON: ')
C SET TO TAKE INPUT FROM CONSOLE
  YMXPLT=0.
C WIDTH OF PLOTTER PAPER USED
  21. NTOT=0
  NPLOT=0
C USED TO COUNT THE TOTAL NUMBER OF STATIONS IN THE FILE AND THE
C NUMBER OF STATIONS PLOTTED
  860 WRITE(5,100)
  100 FORMAT(' XMINNNNNN XMAXXXXXX IN KM')
  READ(5,*) XMIN, XMAX
  IF (XMAX .LE. XMIN) GOTO 860
C LOWER AND UPPER X VALUES (KM E)
  XMIN=XMIN*1000.0D00
  IXMIN=XMIN
  XMAX=XMAX*1000.0D00
  IXMAX=XMAX
C CONVERT TO METRES
  861 WRITE(5,102)
  102 FORMAT(' YMINNNNNN YMAXXXXXX IN KM')
  READ(5,*) YMIN, YMAX
  IF (YMAX .LE. YMIN) GOTO 861
C LOWER AND UPPER Y VALUES (KM N)
  YMIN=YMIN*1000.0D00
  IYMIN=YMIN
  YMAX=YMAX*1000.0D00
  IYMAX=YMAX
C CONVERT TO METRES
  862 WRITE(5,103)
  103 FORMAT(' SCALE?(E. G. 50000. )')
  READ(5,*) SCALE
  FACT=1. E+2/(2.54*SCALE)
C THE FACTOR TO CONVERT FROM GRID METRES TO PLOTTER INCHES
  LABEL=. TRUE.
  METRES=. TRUE.
  IF (SCALE .LE. 2001. ) GOTO 851
  IF (SCALE .LE. 5001. ) GOTO 852
  IF (SCALE .LE. 25005. ) GOTO 853
  IF (SCALE .LE. 100010. ) GOTO 854

```

C

5/20

```
C COPE WITH SCALE GREATER THAN 100000. HERE
  METRES=. FALSE.
  DFACT=10000
  SPCE=100000
  TXSP=10000
  GOTO 855

C
C SCALE .LE. 100000, SCALE .GT. 25000
854 METRES=. FALSE.
  DFACT=1000
  TXSP=1000
  SPCE=10000
  GOTO 855

C
C SCALE .LE. 25000, SCALE .GT. 5000
853 DFACT=250
  TXSP=250
  SPCE=1000
  GOTO 855

C
C SCALE .LE. 5000, SCALE .GT. 2000
852 DFACT=100
  TXSP=100
  SPCE=500
  GOTO 855

C
C SCALE .LE. 2000
851 DFACT=100
  LABEL=. FALSE.
  TXSP=10
  SPCE=100
855 CONTINUE
  IFXMIN=((IXMIN+1)/DFACT)*DFACT
  FXMIN=IFXMIN
  IFXMAX=((IXMAX+DFACT-1)/DFACT)*DFACT
  FXMAX=IFXMAX
  IFYMIN=((IYMIN+1)/DFACT)*DFACT
  FYMIN=IFYMIN
  IFYMAX=((IYMAX+DFACT-1)/DFACT)*DFACT
  FYMAX=IFYMAX

C GET THE RANGES AND ROUND UP AND DOWN TO THE NEAREST PIP
C GET THE MAXIMUM Y VALUE TO WORK OUT IF THE PLOT CAN POSSIBLY
C FIT ON THE PAGE
  YTMP=FYMAX
  CALL XFORM(YTMP, FYMIN, FACT)
  YTMP=YTMP+2.1

C GET TOTAL WIDTH OF NEW PLOT INCLUDING TICKS AND LABELS
  IF (YTMP .LE. 35.5) GOTO 870

C WILL FIT ON PAPER
863 WRITE(5, 230)
230 FORMAT(' PLOT WILL NOT FIT' /
. / ' CHANGE X AND Y RANGES (R) OR SCALE (S) / / ?')
  READ(5, 229) AOK
  IF (AOK .EQ. AR) GOTO 860

C NEW VALUES FOR X AND Y RANGES
  IF (AOK .NE. AS) GOTO 863
  GOTO 862

C EITHER NEED A NEW SCALE OR HAVE AN INVALID OPTION
870 CONTINUE

C
```

6/20

```

      NSURV=1
C THE COUNTER FOR THE NUMBER OF DIFFERENT SURVEY NUMBERS
      REWIND 4
C INPUT FILE
      SURV=.FALSE.
      WRITE(5,231)
231 FORMAT(' NUMBER OF DECIMAL PLACES (0-6)?/' I')
      READ(5,*) IPLCE
      IF (IPLCE .EQ. 0) IPLCE=-1
C CONVERT 0 DEC. PLACES TO -1 FOR CONVENTION USED IN NUMBER
      FACTMK=1.0
C THE FACTOR FOR SCALING THE SYMBOLS
232 WRITE(5,233)
233 FORMAT(' SMALL SYMBOLS? (Y OR N)')
      READ(5,229) AOK
      IF (AOK .EQ. NO) GOTO 234
      IF (AOK .NE. YES) GOTO 232
      FACTMK=0.5
234 CONTINUE
      WRITE(5,105)
105 FORMAT(' ENTER MAP TITLE - TERMINATE BY &')
      READ(5,106) TITLE
106 FORMAT(40A2)
      25 WRITE(5,109)
109 FORMAT(' OPTIONS'//
      / 1 LOCATIONS'//
      / 2 LOCATIONS WITH CIRCLES ROUND NOMINAL POSITION'//
      / 3 STATION NUMBERS'//
      / 4 GRAVITY ANOMALY'//
      / 5 STATION NUMBER AND GRAVITY ANOMALY'// 0')
      READ(5,*) IOPT
      IF (IOPT .LE. 0) GOTO 25
      GOTO (802,801,802,802,802), IOPT
      GOTO 25
C READ THE OPTION AND GO TO THE RIGHT PALCE
801 WRITE(5,111)
111 FORMAT(' XXXXSPACE YYYYYSPACE IN METRES')
      READ(5,*) XSP,YSP
C GET THE NOMINAL STATION SPACING
      WRITE(5,112)
112 FORMAT(' RRRRADIUS OF CIRCLE IN METRES')
      READ(5,*) ERRRAD
C NOW HAVE ALL ADDITIONAL DETAILS NEEDED FOR OPTION 2
C
802 WRITE(6,108) TITLE, XMIN, XMAX, YMIN, YMAX, SCALE
108 FORMAT(1X,40A2// ' BETWEEN',F9.1,' AND',F9.1,' N E AND',
      / F9.1,' AND',F9.1,' M N'// SCALE 1:',F8.0)
      IF (YMXPLT+YTMP .LE. 35.5 .AND. YMXPLT .NE. 0.0) GOTO 23
C FITS ON THE PAPER SO BRANCH
      IF (YMXPLT .GT. 0.) CALL RSTR(1)
C INDEX TO THE NEXT PLOT
      IF (YMXPLT .EQ. 0.) CALL INITAL(9,200,36,1,0,0)
C INITIALISE PLOTTER
      CALL PLOT(0.5,2.,-3)
C MOVE TO 0.5,2.0 AND CALL IT 0.0,0.0
      YMXPLT=YTMP
      YMXLST=YTMP
      GOTO 24
C
C NOW FOR A PLOT THT FITS ON THE WIDTH AVAILABLE

```

7/20

```
23 CALL PLOT(0.0, YMXLST, -3)
C MOVE TO ABOVE THE LAST PLOT AND CALL IT 0.0, 0.0
  YMXPLT=YMXPLT+YTMP
  YMXLST=YTMP
C UPDATE YMXPLT
C
  24 CONTINUE
C
C NOW FOR SOME AXES
  DX=IFXMIN-TXSP
  10 DX=DX+TXSP
  XTMP=DX
  CALL XFORM(XTMP, FXMIN, FACT)
  CALL PLOT(XTMP, 0., 2)
C MOVE TO START OF PIP
  LINE=MOD(DX, SPCE) .EQ. 0
C CHECK TO SEE IF NEED TO DRAW LINE
  CALL XLABEL(DX, FYMIN, FYMAX, FACT, XTMP, LABEL, LINE, METRES)
  IF (IFXMAX .GT. DX) GOTO 10
C GO ALONG BOTTOM AND FINISH AT A PIP WITH DX=FXMAX, XTMP=FXMAX IN PLOTTER INCHE
C
C UP R. H. S.
  DY=IFYMIN-TXSP
  11 DY=DY+TXSP
  YTMP=DY
  CALL XFORM(YTMP, FYMIN, FACT)
  CALL PLOT(XTMP, YTMP, 2)
  LINE=MOD(DY, SPCE) .EQ. 0
C CHECK TO SEE IF MULTIPLE
  CALL YLABEL(DY, FXMIN, FXMAX, FACT, YTMP, LABEL, LINE, METRES)
  IF (IFYMAX .GT. DY) GOTO 11
C NOW GONE UP R. H. S.  DY=FYMAX
C
  YTMP=FYMAX IN PLOTTER COORDS.
C
  CALL PENDN
  12 XTMP=DX
  CALL XFORM(XTMP, FXMIN, FACT)
  CALL PLOT(XTMP, YTMP, 1)
  CALL PLOT(XTMP, YTMP+0.1, 1)
  CALL PLOT(XTMP, YTMP, 1)
  DX=DX-TXSP
  IF (DX .GE. IFXMIN) GOTO 12
C DRAWN PIPS ALONG TOP
C
  14 YTMP=DY
  CALL XFORM(YTMP, FYMIN, FACT)
  CALL PLOT(0., YTMP, 1)
  CALL PLOT(-0.1, YTMP, 1)
  CALL PLOT(0., YTMP, 1)
  DY=DY-TXSP
  IF (DY .GE. IFYMIN) GOTO 14
C DRAWN PIPS DOWN L. H. S.
  CALL PENUP
  CALL PWRITE(0.5, -1.0, 0.28, 0., TITLE)
C THE TITLE IS PACKED BY THE READ
C WRITE THE TITLE
C
  IF (IOPT .NE. 2) GOTO 31
C DONT NEED TO DRAW CIRCLES ROUND NOMINAL POSITION SO GO ELSEWHERE
  ERRRAD=ERRRAD*FACT
```

```

C GET RADIUS IN PLOTTER INCHES
  IXBOT=IXMIN
  IYBOT=IYMIN
C STARTING VALUES FOR NOMINAL POSITIONS
  16 X=IXBOT
  CALL XFORM(X,FXMIN,FACT)
C TRANSFORM TO INCHES
  17 Y=IYBOT
  CALL XFORM(Y,FYMIN,FACT)
C PLOTTER INCHES
  CALL CIRCLE(X,Y,ERRRAD)
C USE THE INBUILT CIRCLE SOFTWARE
  IYBOT=IYBOT+YSP
  IF (IYBOT .LE. IYMAX) GOTO 17
C ALLOW SOME MARGIN FOR THE REPEATED ADDITIONS
  IYBOT=IYMIN
  IXBOT=IXBOT+XSP
  IF (IXBOT .LE. IXMAX) GOTO 16
C CHECK TO SEE STILL IN X RANGE
C DONT TRY TO OPTIMISE PEN MOVEMENT IN THE ABOVE
C
C NOW SET UP THE OTHER OPTIONS
  31 YBOT=0.0
  IF (IOPT .EQ. 5) YBOT=0.07
C OFFSET FOR LABELLING NUMBER AND GRAVITY
C NOW TO GO THROUGH THE DATA
  30 READ(4,104,END=50) SURVNO,STATNO,X,Y,BA
  104 FORMAT(I5,1X,I4,2F9.1,36X,F8.2)
  NTOT=NTOT+1
C INCREMENT THE TOTAL NUMBER OF STATIONS
  IF (X .LT. XMIN .OR. X .GT. XMAX .OR. Y .LT. YMIN
  .OR. Y .GT. YMAX) GOTO 30
C CHECK TO SEE IF IN AREA
  NPLOT=NPLOT+1
C INCREMENT THE NUMBER OF STATIONS ACTUALLY PLOTTED
  WRITE(6,107) SURVNO,STATNO,X,Y,BA
  107 FORMAT(I5,' ',I4,2F10.1,F10.2)
C WRITE ALL PLOTTED STATIONS TO PRINTER
  IF (SURV) GOTO 53
  SURV=.TRUE.
  SURVEY(1)=SURVNO
  53 CONTINUE
  DO 15 ISYMB=1,NSURV
  IF (SURVEY(ISYMB) .EQ. SURVNO) GOTO 20
C ALREADY KNOW THIS NUMBER
  15 CONTINUE
  NSURV=NSURV+1
  ISYMB=NSURV
  SURVEY(NSURV)=SURVNO
C ADD NEW SURVEY NUMBER TO INDEX
  20 CONTINUE
  ASURV=STATNO
C GOT STATION NUMBER ALMOST AS AN INTEGER
  CALL XFORM(X,FXMIN,FACT)
  CALL XFORM(Y,FYMIN,FACT)
  CALL PLOT(X,Y,1)
  CALL FACTOR(FACTMK)
  IF (ISYMB .GT. 14) ISYMB=14
C ONLY HAVE 14 SYMBOLS AVAILABLE
  CALL MARKER(ISYMB)

```

9/20

```
CALL FACTOR(1.)
IF (IOPT .LE. 2) GOTO 30
C ONLY WANTED THE MARKER AND THE CIRCLE PERHAPS
IF (IOPT .EQ. 3 .OR. IOPT .EQ. 5) CALL
NUMBER(X+0.07, Y+YBOT, FACTMK*0.07, ASURV, 0., -1)
IF (IOPT .GE. 4) CALL
NUMBER(X+0.07, Y-YBOT, FACTMK*0.07, BA, 0., IPLCE)
GOTO 30
C PLOTTED AND LABELLED STATION
50 CONTINUE
C END OF RUN WHEN GET TO HERE SO TIDY UP A LITTLE
IF (.NOT. SURV) GOTO 54
C NO STATIONS IN AREA
IF (NSURV .EQ. 1 .AND. SURVEY(1) .EQ. 0) GOTO 54
C HAD DATA WITHOUT SURVEY NUMBERS
X=0.5
Y=-1.2
DO 51 I=1, NSURV
IMIN=12000
DO 52 J=1, NSURV
IF (SURVEY(J) .EQ. 0) GOTO 52
C ALREADY AND PRINTED IN ORDER
IF (SURVEY(J) .GT. IMIN) GOTO 52
C ALREADY LOOKING AT AN EARLIER SURVEY
IMIN=SURVEY(J)
ISYMB=J
52 CONTINUE
CALL PLOT(X, Y, 1)
J=ISYMB
IF (ISYMB .GT. 14) ISYMB=14
CALL MARKER(ISYMB)
ASURV=IMIN
CALL NUMBER(X+0.15, Y-0.07, .14, ASURV, 0., -1)
SURVEY(J)=0
X=X+1.0
C AND SPACE ALONG A BIT
51 CONTINUE
54 WRITE(7, 227) NTOT, NPLOT
227 FORMAT(I7, ' STATIONS ON FILE'//I7, ' STATIONS PLOTTED')
C WRITE THE NUMBER OF STATIONS PLOTTED ON LU 7
WRITE(5, 228)
228 FORMAT(' MORE PLOTS?')
READ(5, 229) AOK
229 FORMAT(A1)
IF (AOK .EQ. YES) GOTO 21
IF (AOK .NE. NO) GOTO 54
CALL RSTR(2)
STOP
END
SUBROUTINE XFORM(X, XBASE, FACT)
C FIND THE POSITION OF X RELATIVE TO XBASE IN PLOTTER INCHES
C AND RETURNS THE ANSWER IN X!!!!!!!!!!!!
X=(X-XBASE)*FACT
RETURN
END
SUBROUTINE XLABEL(IX, YMIN, YMAX, FACT, XT, LABEL, LINE, METRES)
LOGICAL LABEL, LINE, METRES
REAL TITLE(2)
DATA TITLE/3HM E, 4HKM E/
CALL PLOT(XT, -0.1, 1)
```

```

      IF (.NOT. LABEL .AND. .NOT. LINE) GOTO 10
C ONLY WANT PIP
      IIX=IX
      IF (.NOT. METRES) IIX=IIX/1000
      CALL NUMPRT(XT-0.035, -0.15, IIX, 270.)
      IF (.NOT. LINE) GOTO 10
      CALL WHERE(XX, YY, AX)
C FIND THE PEN
      CALL MOVREL
      IF (METRES) CALL SYMBOL(XX, YY, 0.07, TITLE(1), 270., 3)
      IF (.NOT. METRES) CALL SYMBOL(XX, YY, 0.07, TITLE(2), 270., 4)
      CALL MOVABS
      YY=YMAX
      CALL XFORM(YY, YMIN, FACT)
      CALL PLOT(XT, YY+0.1, 1)
      CALL PENDN
10 CALL PLOT(XT, 0., 1)
      RETURN
      END
      SUBROUTINE YLABEL(IY, XMIN, XMAX, FACT, YT, LABEL, LINE, METRES)
      LOGICAL LINE, LABEL, METRES
      REAL TITLE(2)
      DATA TITLE/3HM N, 4HKM N/
C USE FOR LABELLING IN SYMBOL
      X=XMAX
      CALL XFORM(X, XMIN, FACT)
      CALL PLOT(X+0.1, YT, 1)
      IF (.NOT. LABEL .AND. .NOT. LINE) GOTO 10
C ONLY WANTED PIP
      IIY=IY
      IF (.NOT. METRES) IIY=IIY/1000
      CALL NUMPRT(X+0.15, YT-0.035, IIY, 0.0)
      IF (.NOT. LINE) GOTO 10
      CALL WHERE(XX, YY, AY)
C FIND PEN
      CALL MOVREL
      IF (METRES) CALL SYMBOL(XX, YY, 0.07, TITLE(1), 0.0, 3)
      IF (.NOT. METRES) CALL SYMBOL(XX, YY, 0.07, TITLE(2), 0., 4)
      CALL MOVABS
      CALL PLOT(-0.1, YT, 1)
      CALL PENDN
10 CALL PLOT(X, YT, 1)
      RETURN
      END
      SUBROUTINE NUMPRT(X, Y, IVAR, ANG)
C TO WRITE THE INTEGER IVAR WITH NO LEADING BLANKS
C STARTING AT X, Y AT AN ANGLE ANG
C A HEIGHT OF 0.07 IS ASSUMED
      INTEGER*4 BUFF(3)
      ENCODE(BUFF, 100) IVAR
100 FORMAT(I10, '&')
      K=0
      DO 10 I=1, 11
      CALL ILBYTE(IB, BUFF, I-1)
      IF (IB .EQ. 32) GOTO 10
C SKIP SPACES
      CALL ISBYTE(IB, BUFF, K)
      K=K+1
10 CONTINUE
      CALL PWRITE(X, Y, 0.07, ANG, BUFF)

```

11/20


RETURN
END

12/20

C X10W344A


APPENDIX 2

Sample of output, 1:250 000

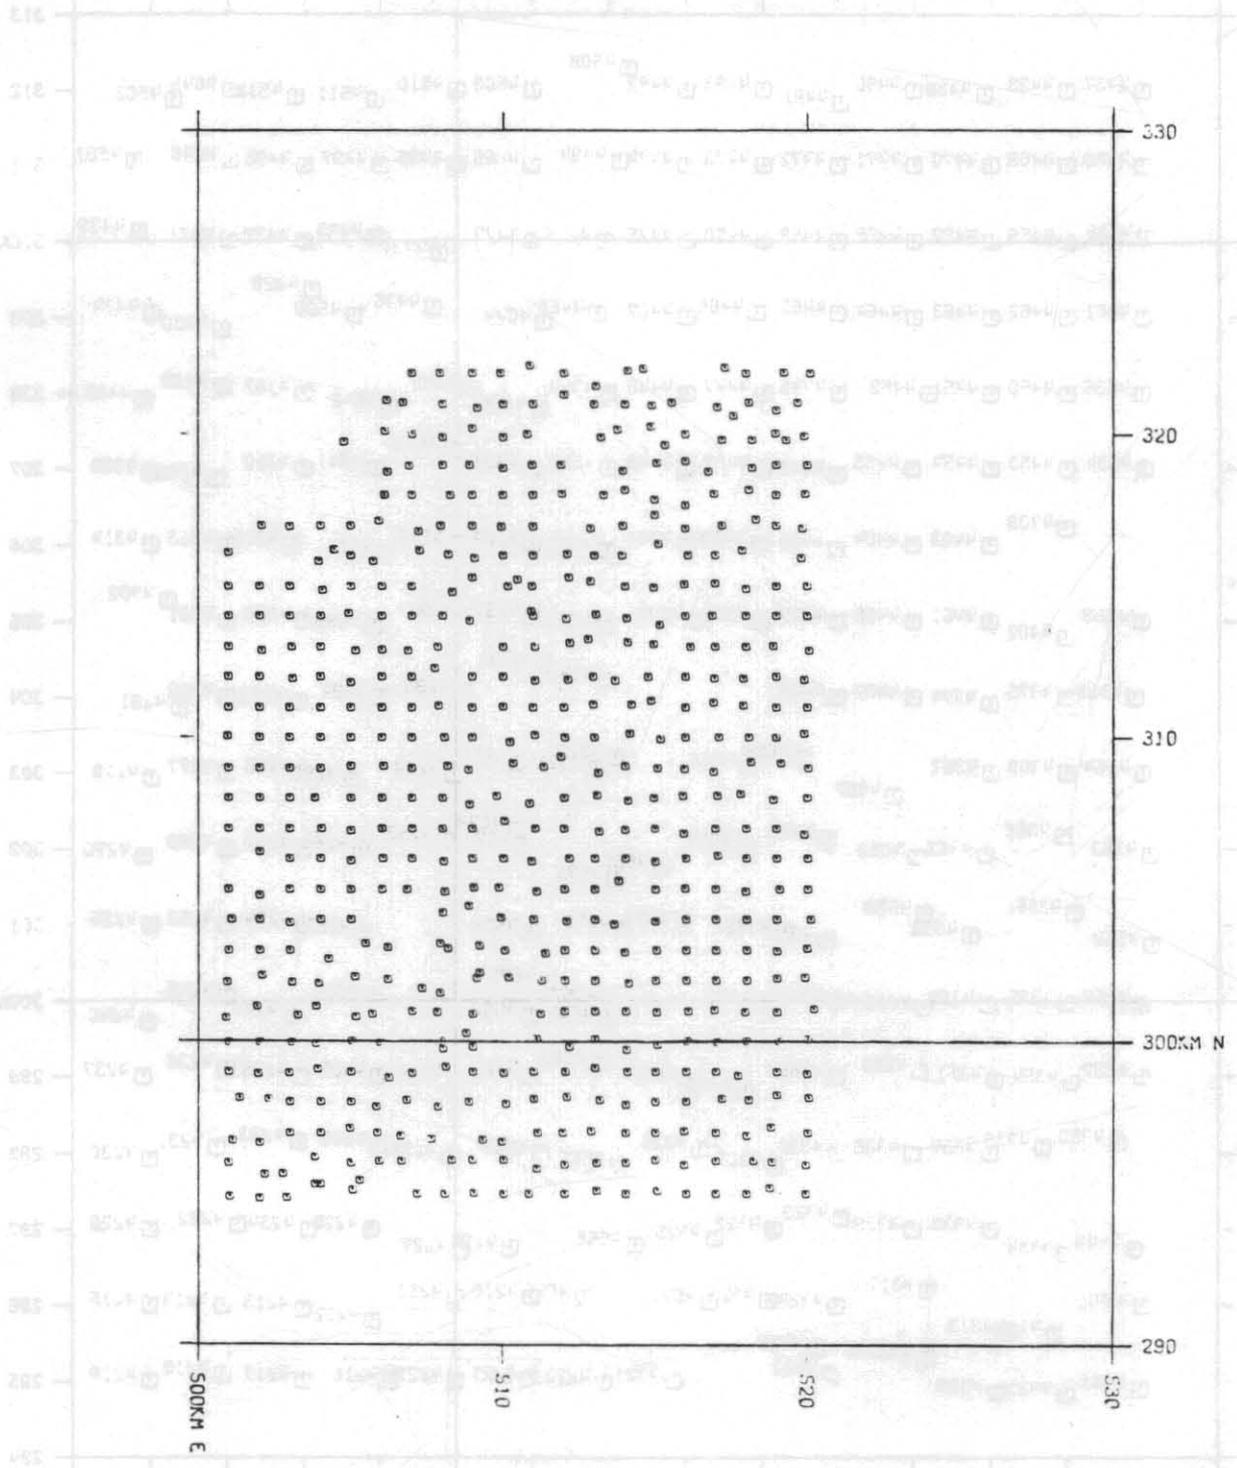

BOTHWELL


□ 8151




13/20

APPENDIX 3

Sample of output, 1:100 000

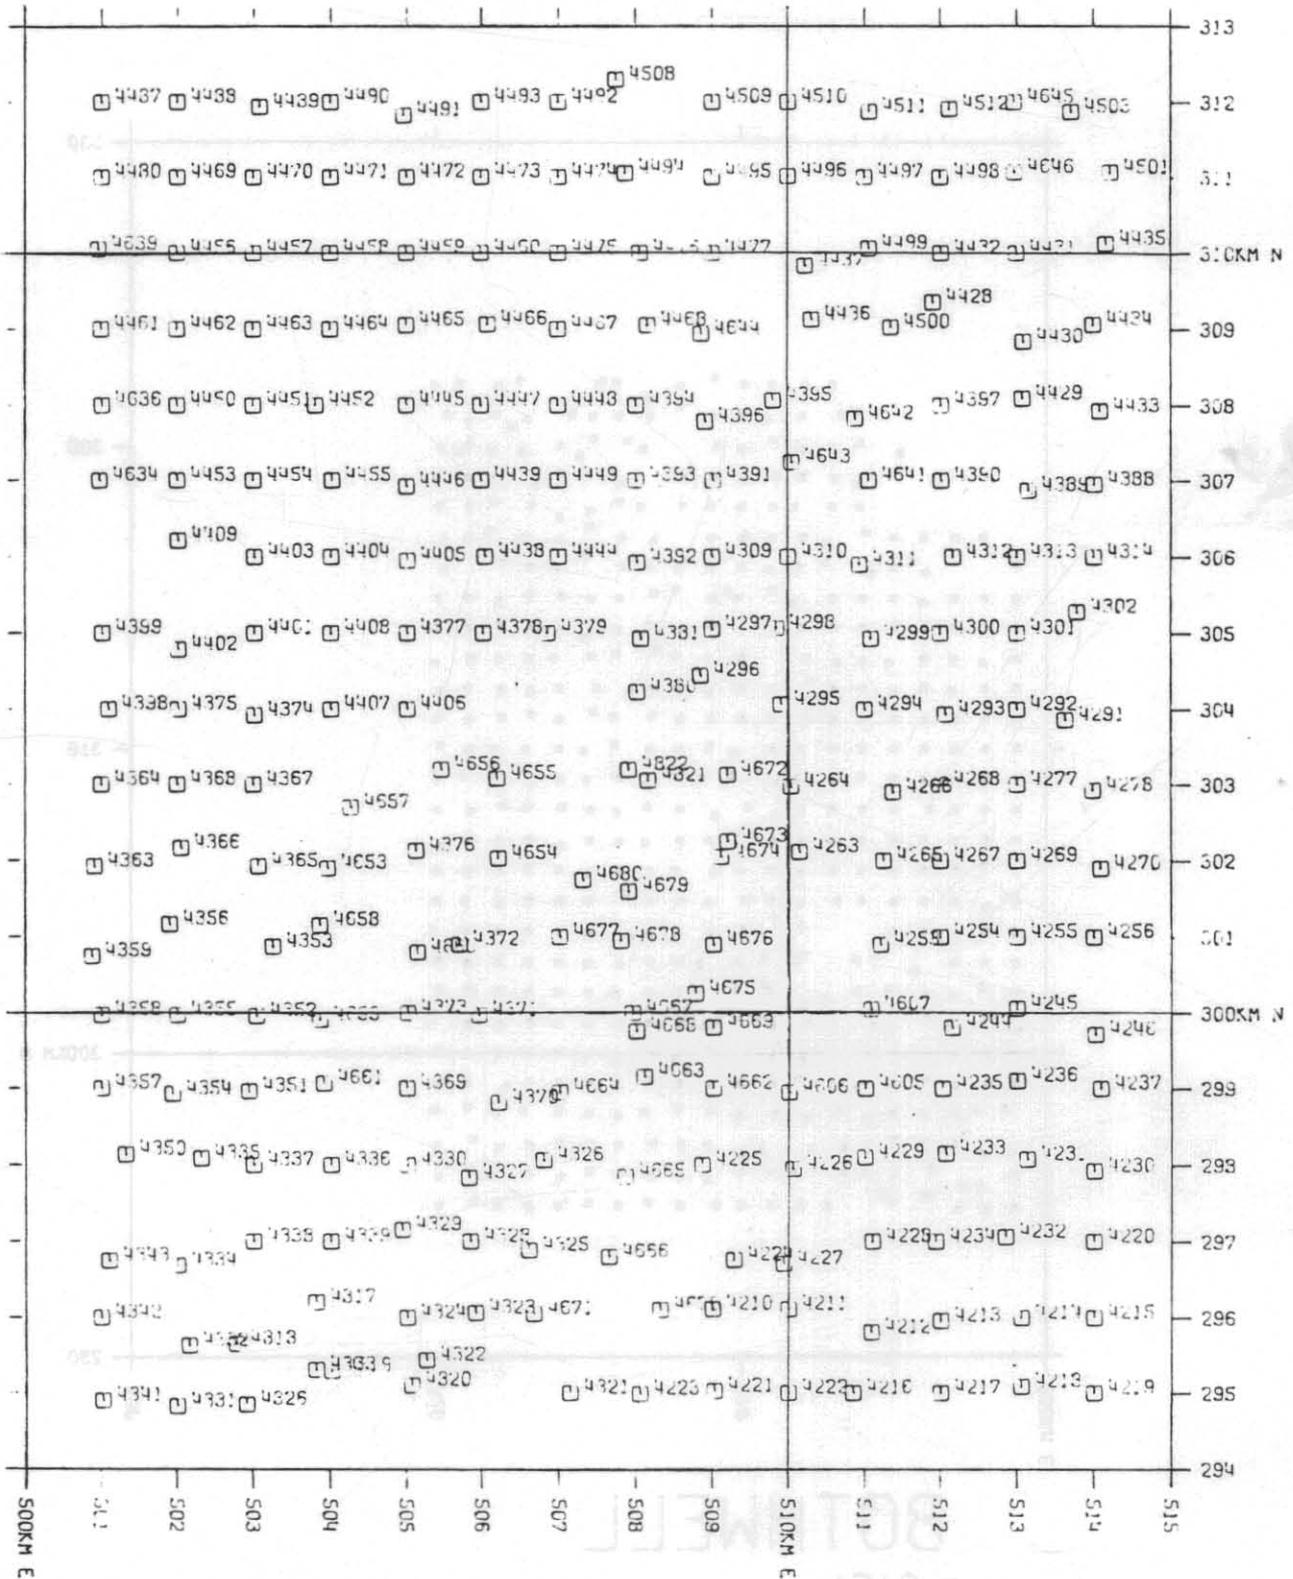

BOTHWELL
8151




14/20


APPENDIX 4

Sample of output, 1:50 000

15/20

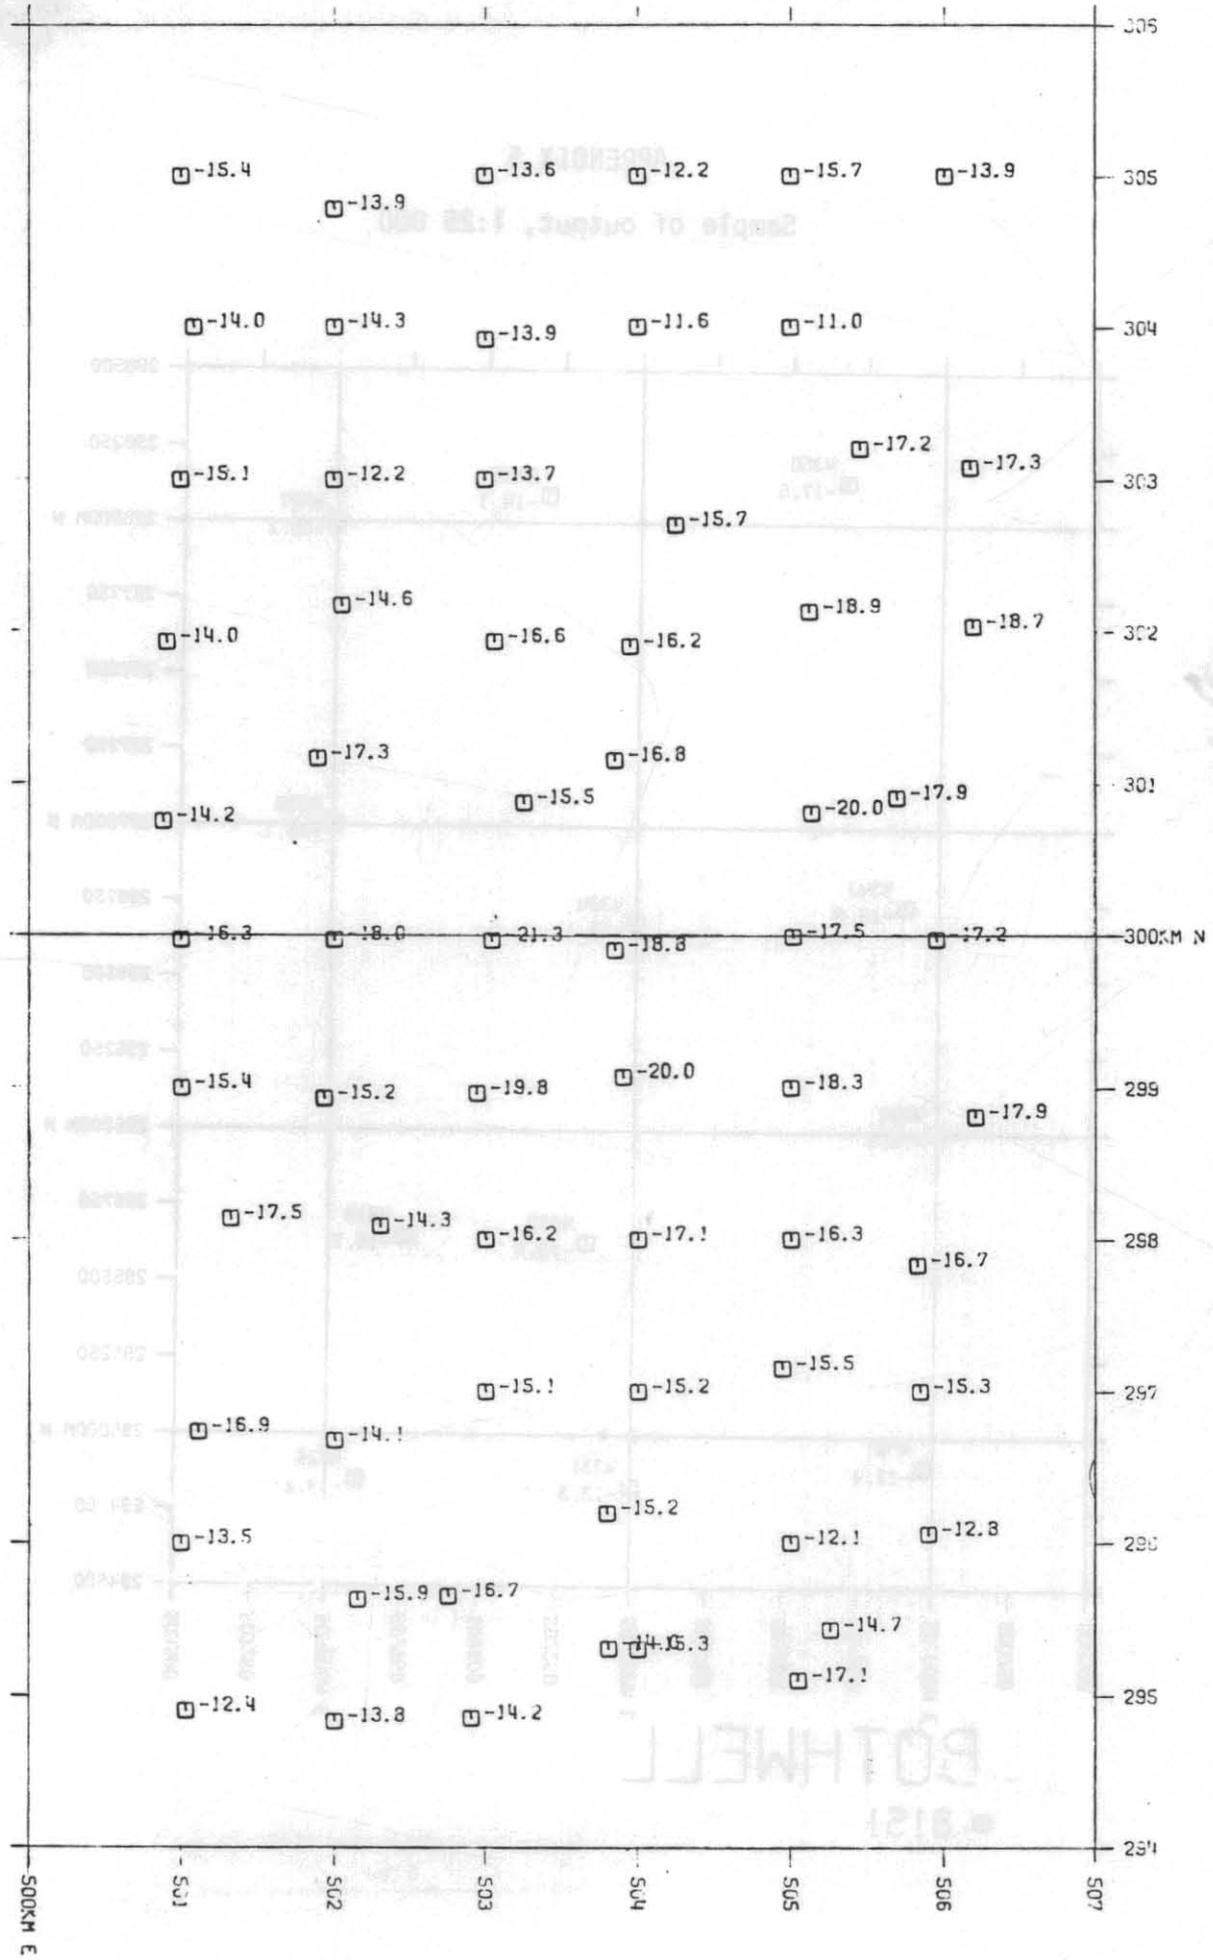


BOTHWELL
 □ 8151
 44-15




03/19

16/20


APPENDIX 5
 Sample of output, 1:25 000

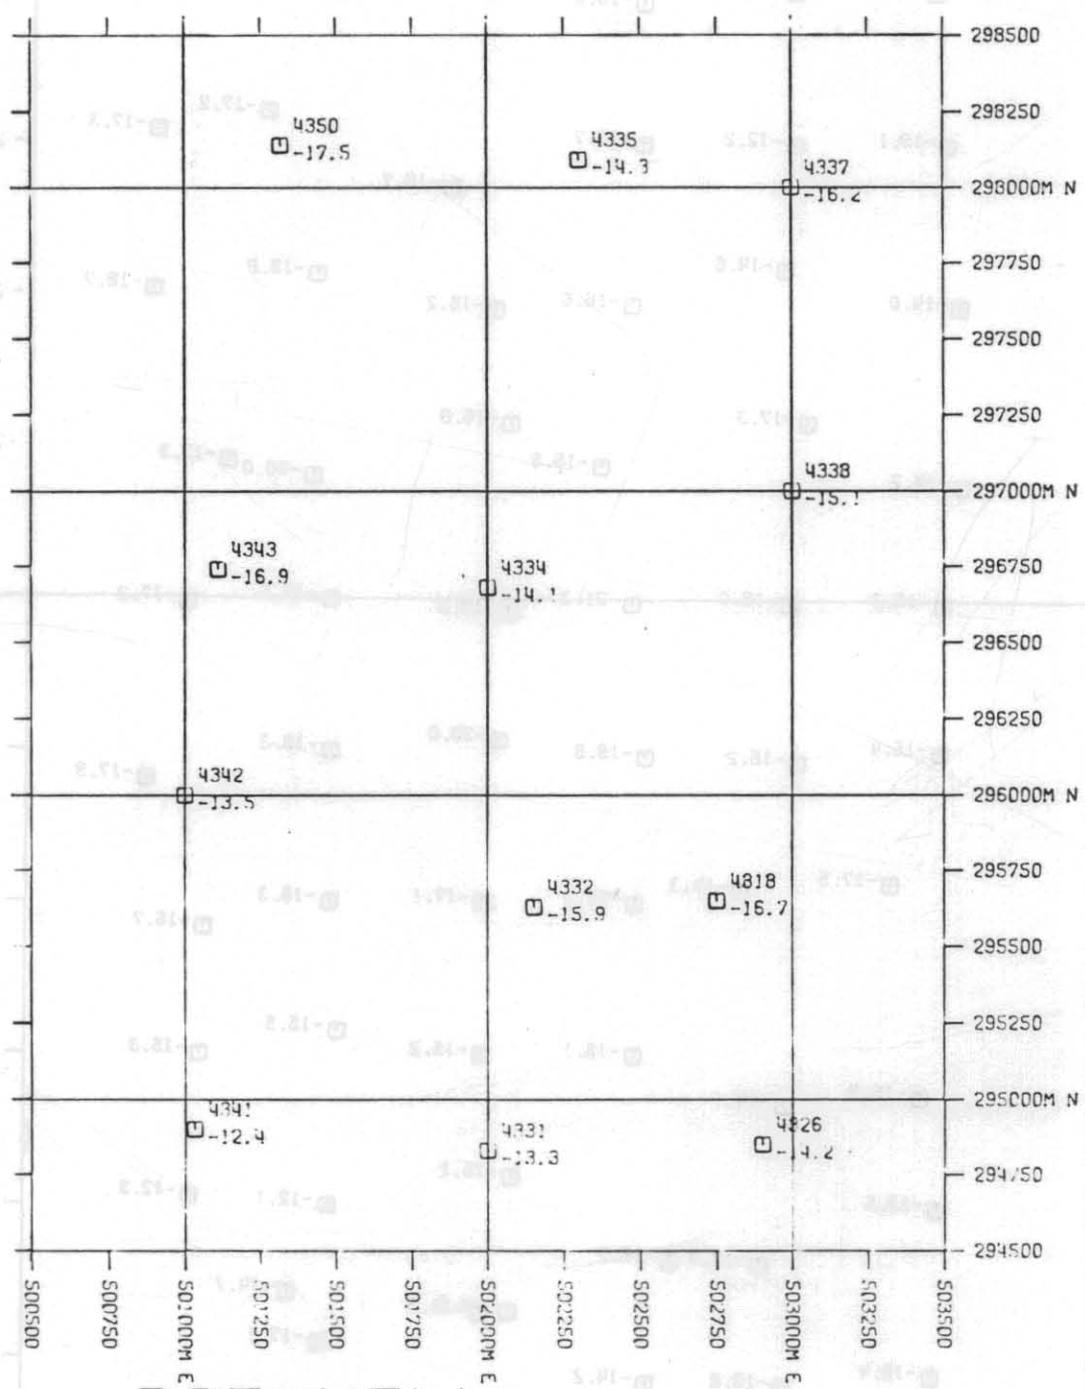

BOTHWELL
 □ 8151



17/20


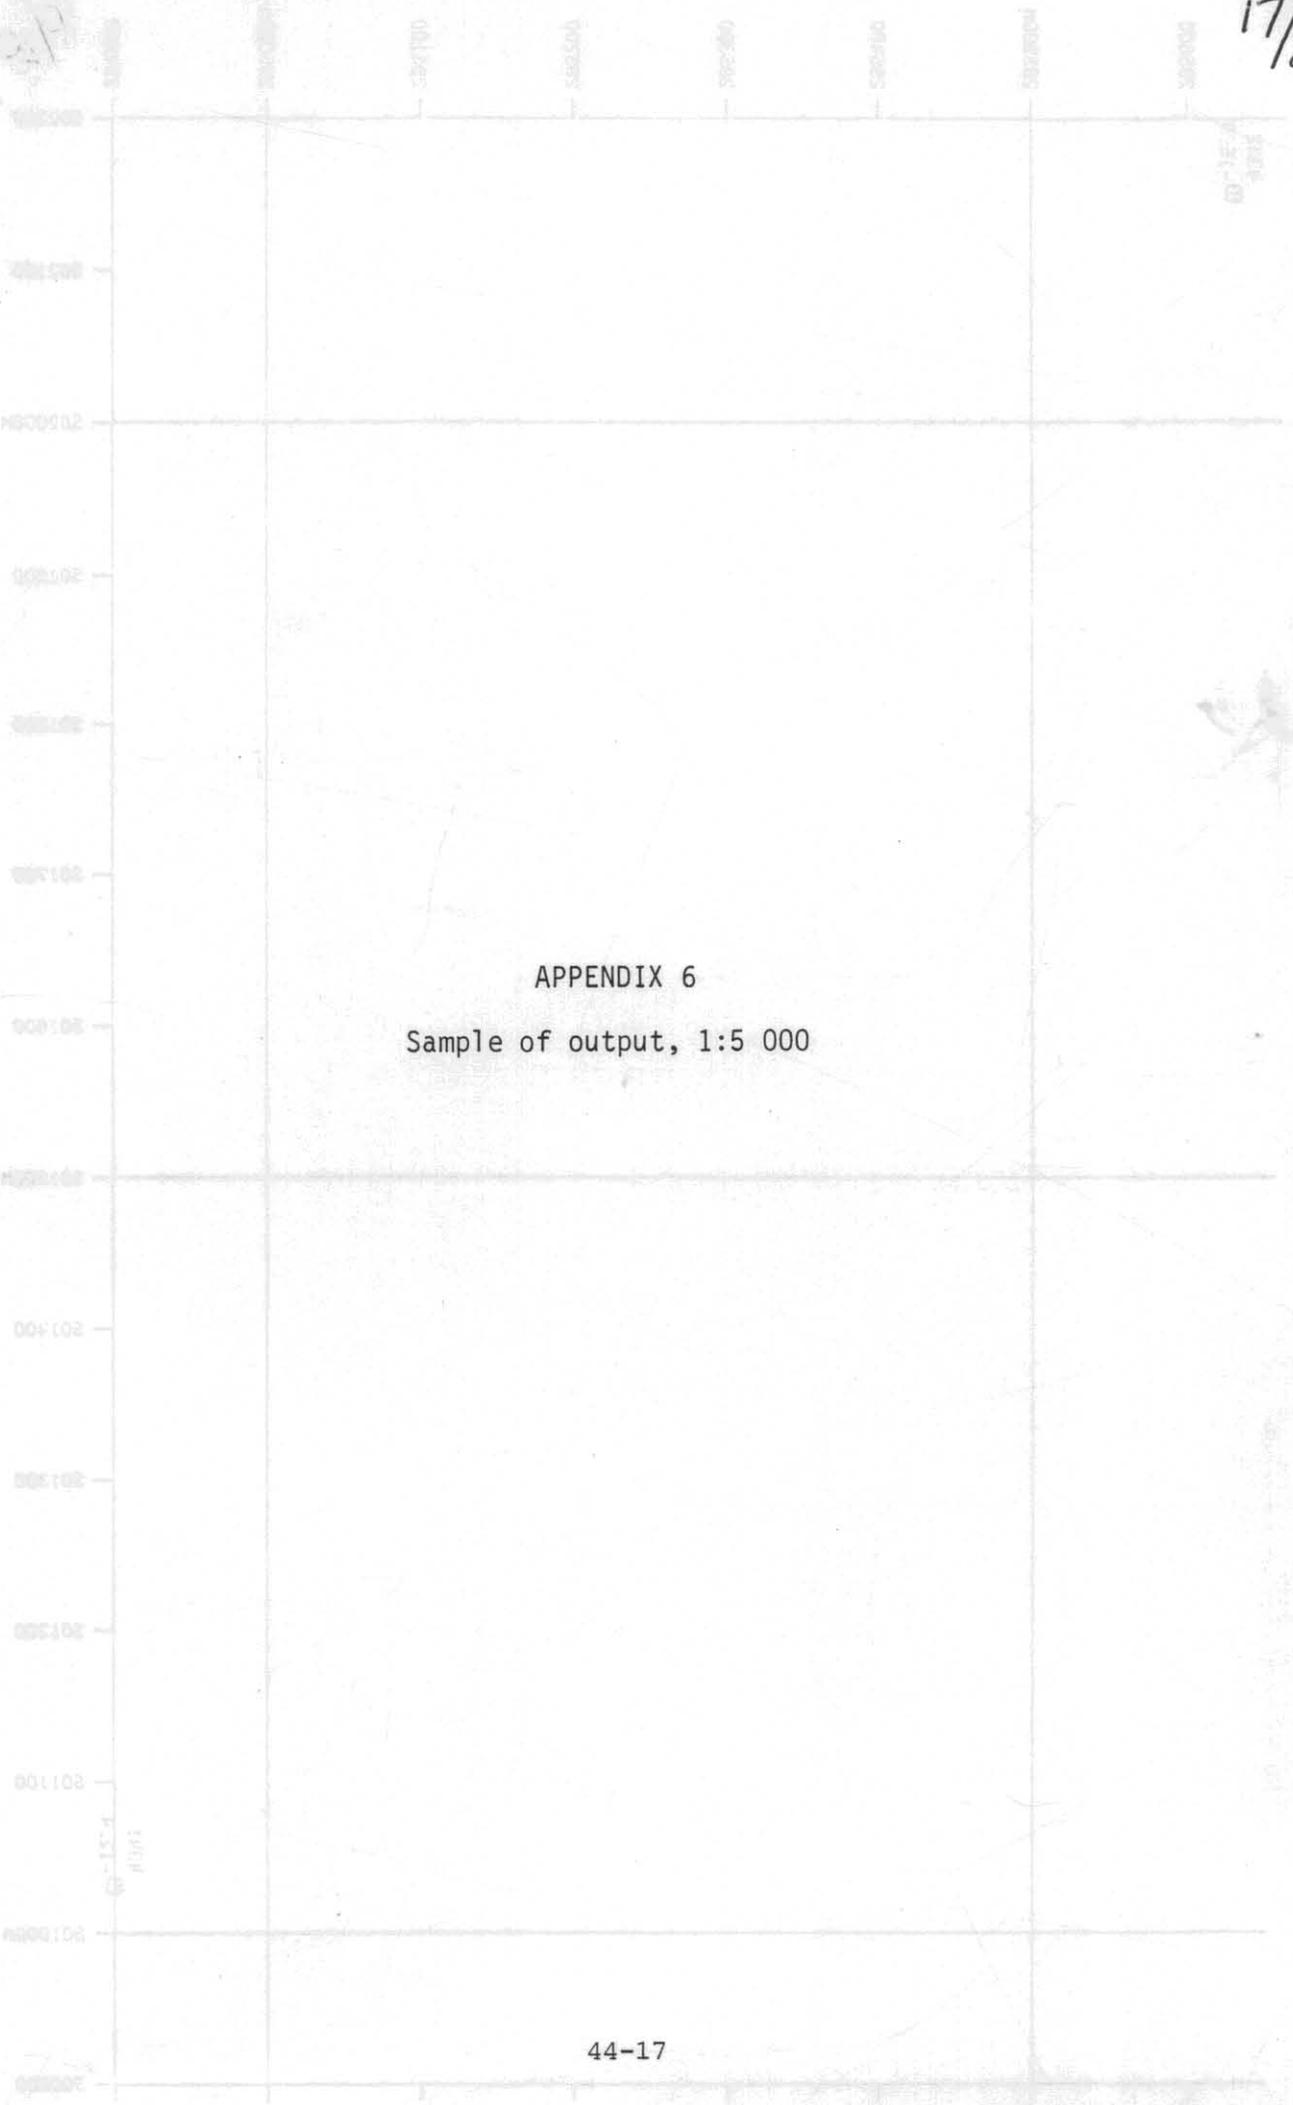


APPENDIX 6

Sample of output, 1:5 000

BOITHEMEL

44-18

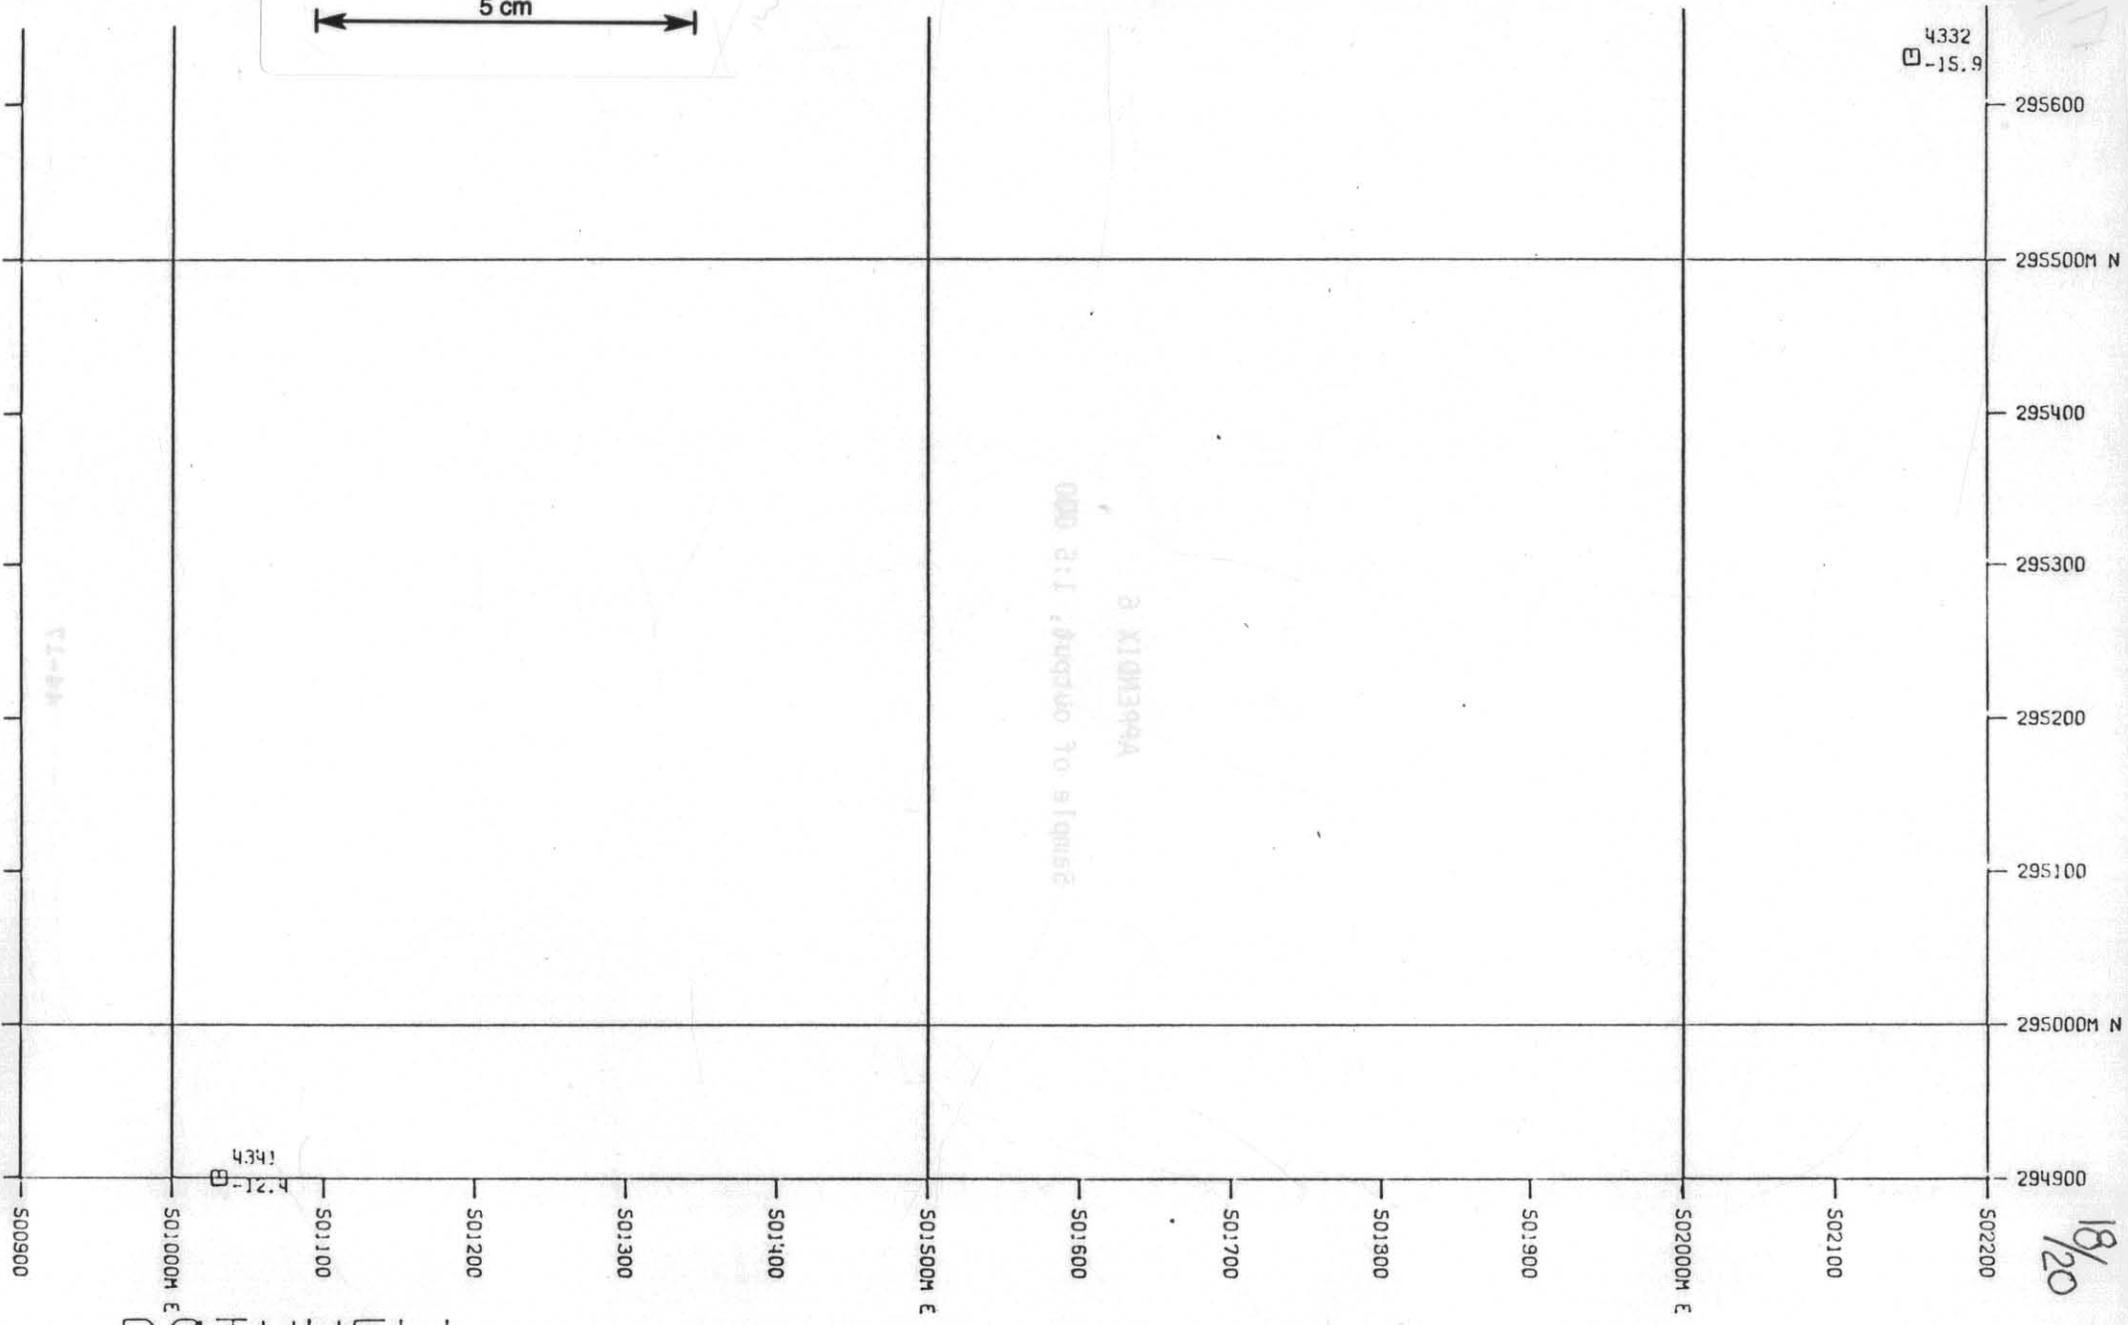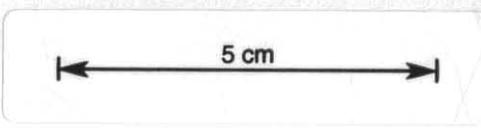

BOTHWELL


8151

8/20

19/20

APPENDIX 7

Sample of output, 1:2 500

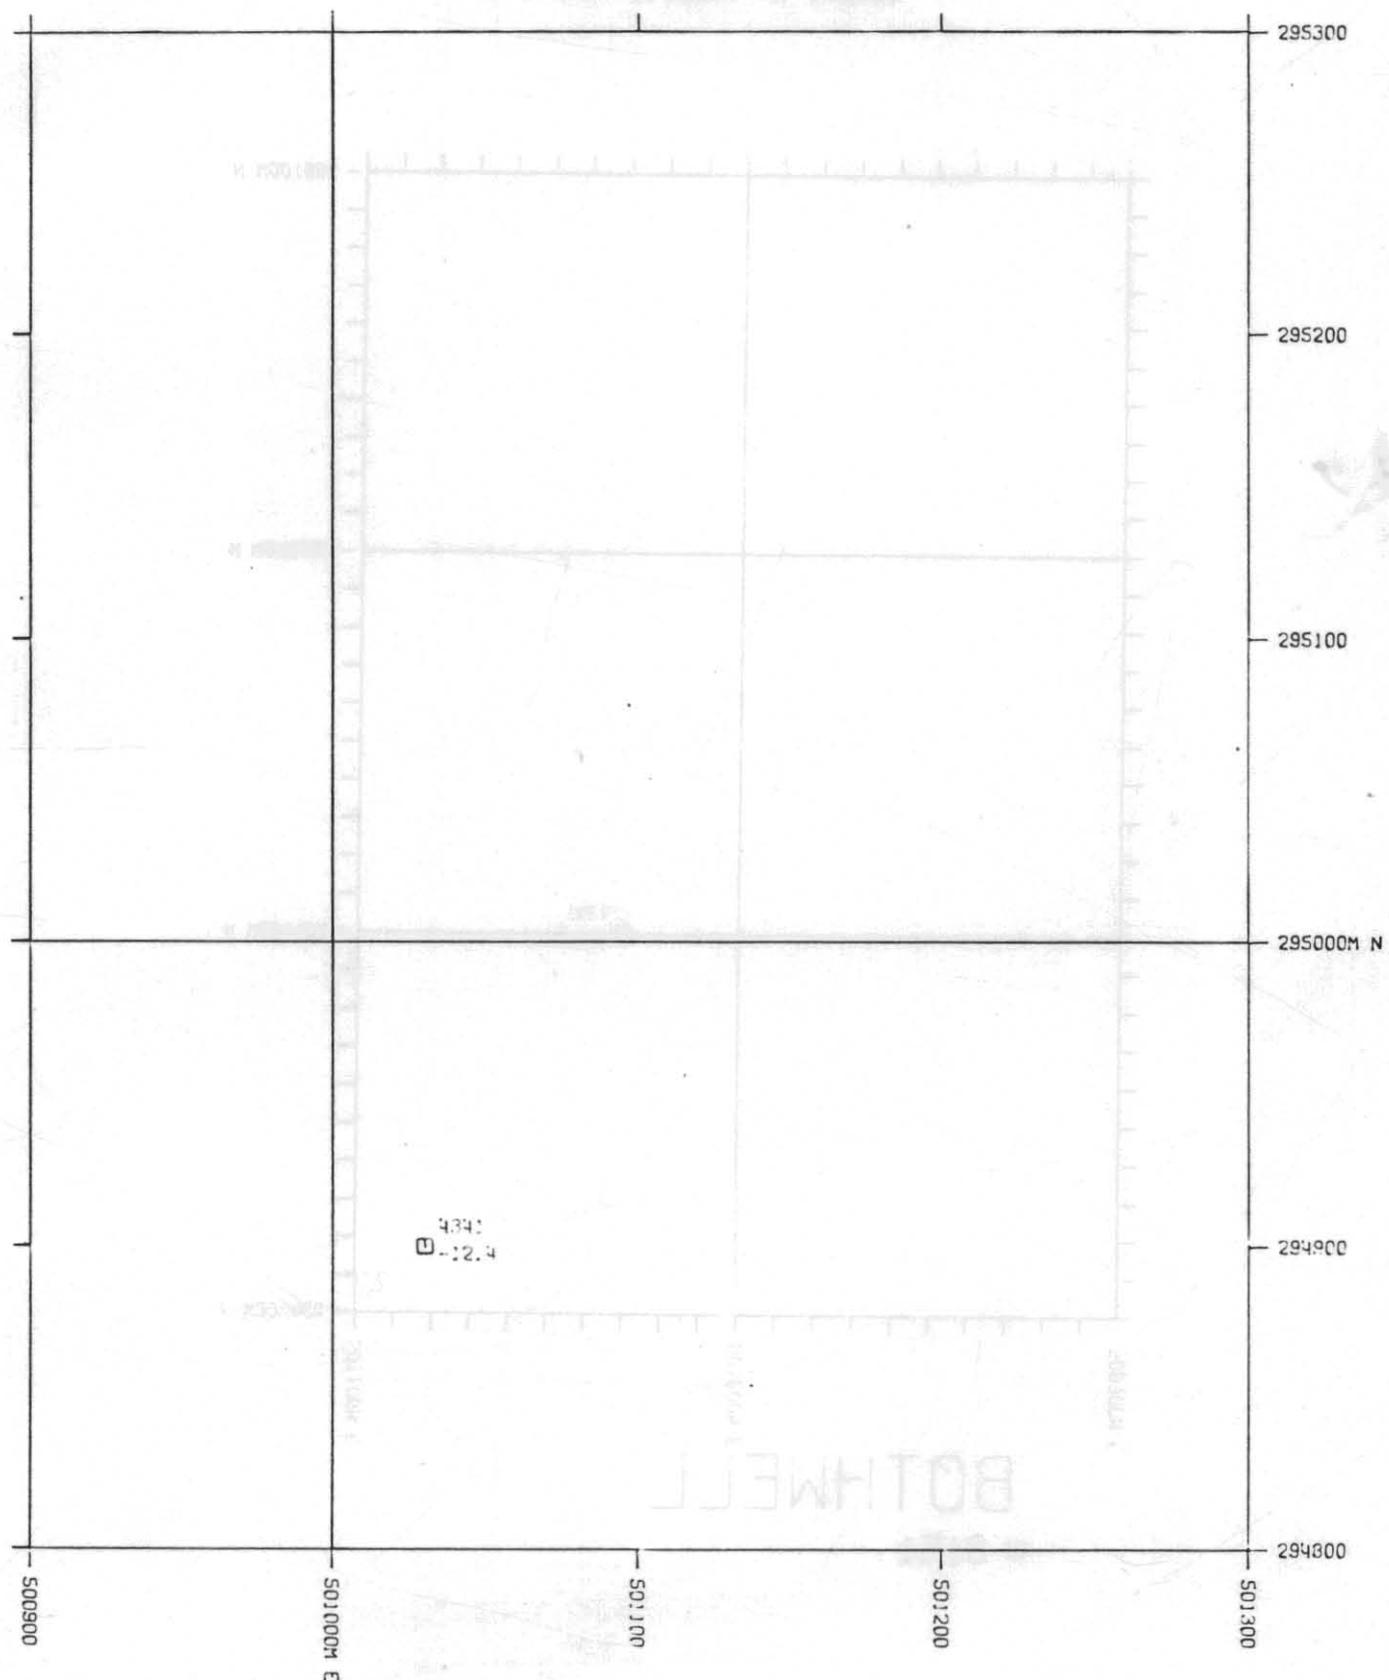

BOTHWELL


□ 8151

DS-44 44-19

5 cm

20/20

APPENDIX 8
Sample of output, 1: 2 000

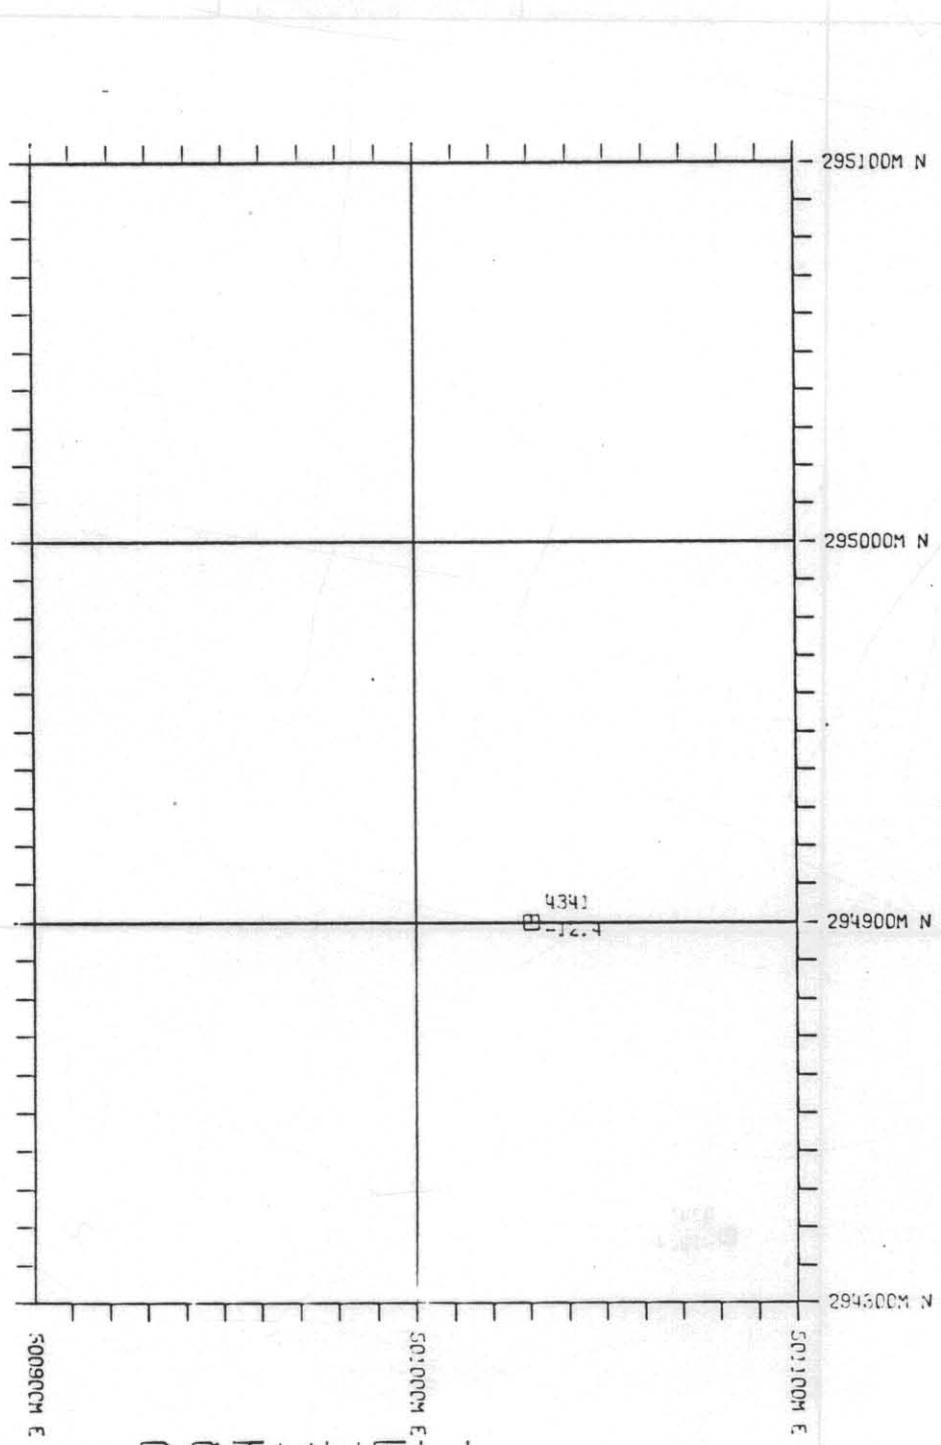

BOTHWELL

8151

