



**Annual Report
to 3 January 2023**

EL15/2017

Tasmanian Advanced Minerals Pty Ltd

Prepared by: Chris Stuart
Date: January 2023

ABSTRACT

- This is the final report for the licence and covers exploration undertaken in 2022.
- The previous report discounted the presence of a commercial resource at all areas but two hills in the south of the tenement.
- Visual observation including by several hand auger holes indicated silica flour is not present at those two locations.
- Having completed exploration works, and finding no commercial resource, the tenement will be surrendered.

Contents

1. INTRODUCTION	3
2. REVIEW OF PREVIOUS WORK	4
3. EXPLORATION COMPLETED DURING THE REPORTING PERIOD	8
4. DISCUSSION OF RESULTS	8
5. CONCLUSIONS	8
6. ENVIRONMENT	9
EXPENDITURE	9
REFERENCES	10

List of Figures

- Figure 1** **Location Plan**
Figure 2: **Auger Hole Locations**
Figure 3: **2020 Inspection Targets**
Figure 4: **2022 Hand Auger Photo**

List of Digital Files

Nil

1. INTRODUCTION

EL 15/2017 is held by Tasmanian Advanced Minerals Pty Ltd (TAM) and is located approximately 10km west-northwest of West Takone (refer to Figure 1, Location Map). The Licence was granted on 4 January 2018. This is the final report, for the period up to 3 January 2023.

TAM is currently mining high purity silica from three locations in Tasmania, from one near Corinna (25M/2003), and from two areas near the Arthur River in northwest Tasmania, Blackwater (6M/2016) and Hawkes Creek (27M/2009).

Exploration is being undertaken to increase resource quantity, and to provide a wider range of impurity profiles in the resource available for blending with existing resources, for processing at TAM's Wynyard factory.

Datum used in this report is GDA94.

Figure 1: Location Map



Base map from The List by TASMAPP, © State of Tasmania

2. REVIEW OF PREVIOUS WORK

From 1988 to 28 March 2017 the ground was held by Mineral Holdings Australia Pty Ltd (MHA) under EL24/1988 and subsequently RL2/1996.

TAM has reviewed that work. The exploration undertaken appears to have consisted of approximately: -

- 9 excavator test pits, 4 of which intercepted >3m of silica flour in the North and South Deposits (Threader, 1990)
- 7 excavator test pits, 3 of which intercepted >3m of silica flour in the North and South Deposits (Threader, 1991)
- 11 excavator test pits 5 of which intercepted >3m of silica flour in the West No. 2 Deposit (Threader, 1994)
- Hand augering to a maximum depth of 1m in West No. 1 and No. 2 deposits (number of holes not recorded)
- 2 bulk samples from the same location in North Deposit for market development purposes.

Based on this combination of 12 test pits and some hand augering MHA reported a resource of 220,000t, (Threader, 1994 and Threader, 1995), as follows:

MHA Deposit Name	Tonnage Estimate
North Deposit	70,000 t
South Deposit	90,000 t
West No. 1 Deposit	10,000 t
West No. 2 Deposit	<u>50,000 t</u>
	220,000 t

There does not appear to have been further resource definition work after 1995.

Based on our experience, TAM considers that 12 test pits spread over four separate deposits is not sufficient on-ground investigation to quantify the above silica resource. Further, review of the resource quantity estimation method indicates MHA extrapolated both depth and the extent of the area of resource further than test pits actually indicated.

In addition, the MHA annual reports provide scant chemical analyses with seemingly inappropriate sample preparation to determine suitability for processing.


Therefore, TAM considers that these resource estimates cannot be relied on to determine the commercial viability of deposits (quantity or quality). The previous work is only a guide for the location of the presence of silica.

In 2018 TAM undertook a limited drilling campaign along Champion Road and existing tracks. Eleven of the holes intercepted a relatively shallow silica deposit which was relatively low in impurities. The size of the deposit was not estimated.

In 2019 TAM undertook a second auger drilling exploration program. Silica was intercepted at 17 of the 45 holes. Of these 17 holes, 4 had a silica depth of 1m and another hole had just 3m. Generally, at least 4m depth is necessary for commercially viable extraction. Holes 19.003, 19.004 had 4m depth but were of very poor quality and not suitable for extraction.

The hole locations for the 2018 and 2019 programs are shown in Figure 2.

Figure 2: Auger Hole Locations

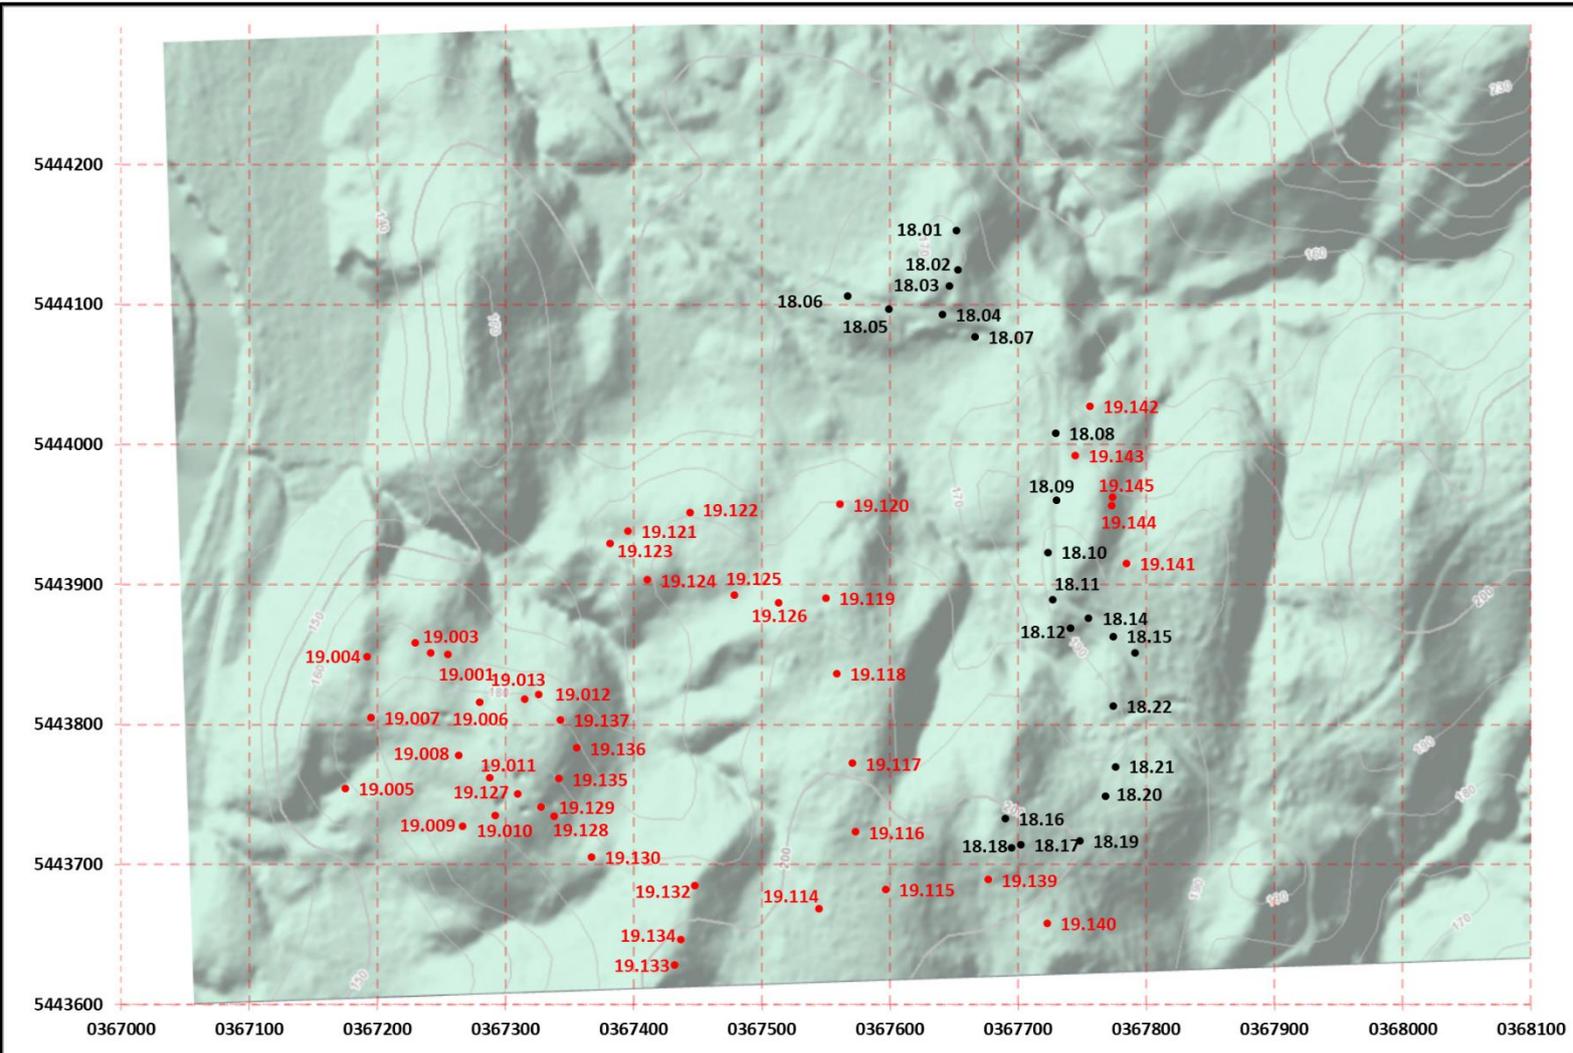

Base map from The List by TASMAP, © State of Tasmania

- Indicates 2018 auger holes
- Indicates 2019 auger holes

In addition to the types and amounts of chemical impurities present in the silica being an important consideration of whether a resource is viable, the particle size distribution is also important. Preferably the particle size distribution should be between 250µm and 45µm. The amount of silica finer than 45µm is preferably less than 40%, or more preferably less than 20%. Hole 19.011 had reasonable chemical quality and a depth of 7m, but averaged 62% finer than 45µm. Similarly, hole 19.013,

the deepest hole at 15m, had good chemical quality but averaged 70% less than 45µm. The fine particle size means that silica is not suitable for use in current applications.

Excluding lack of depth, poor chemical and particle size quality, only 3 holes 19.024, 19.144 and 19.145, returned silica. However, no holes close to 19.024 returned silica. So, it seems there is only a small remnant pod of silica at 19.024.

There appears to be a small, narrow deposit in the vicinity of 19.144, 19.145 and the two 2018 exploration holes 18.10 and 18.11. A speculative estimate of commercial size of this resource is 15,000t. (Note: this is the MHA South Deposit Area estimated by MHA at 90,000t).

A second small, narrow resource appears to be present in the vicinity of 18.01, 18.02, 18.03 and 18.04. This resource is estimated at 8,000t. (Note: this is the MHA North Deposit Area estimated by MHA at 70,000t).

Without finding additional resources in the licence area the size of these two resources is not big enough to justify development costs.

In 2020 exploration activities were impacted by Covid-19 restrictions on TAM's corporate activities. Having completed exploration in the central area of the licence, reconnaissance outside the central area was undertaken. Five hills were investigated by traversing on-foot as shown in Figure 3.


At 367416E, 5444885N there is a designated silica deposit (The List Map: DEPOSIT_ID 9316) on the MRT database. On-site inspection revealed the ground is loam/clay with minor quartz rock. The geology of the hill around the other northern location 367600E 5444740N was found to be loam/clay, as was the south-east hill around 367550E 5443270N. The geology of these hills is not consistent with the presence of a silica deposit.

At both the two south-western hills around 367260E 5443410N (N.Hill) and 367240E and 5443100N (S.Hill) the surface was covered with a thick layer of vegetation and humus, and a sample of the ground could not be taken but appeared to be siliceous. Surface rock samples were taken for analysis. Chemical analysis of some of the rock samples are shown below.

No evidence of silica flour was found in the creek between these two hills, but quartz rock was present.

Sample ID	Al ₂ O ₃	Fe ₂ O ₃	TiO ₂	CaO	MgO	Cu	Cr	Mn	Ni
N.Hill Rock H ₂ O ₂ wash	4980	679	626	69	487	0.6	2.0	0.6	0.6
S.Hill Rock H ₂ O ₂ wash	2333	82	170	168	45	0.2	0.8	1.5	0.2
S.Hill Rock NaOH wash	3121	73	166	204	46	0.3	0.8	0.8	0.4

Figure 3: 2020 Inspection Targets

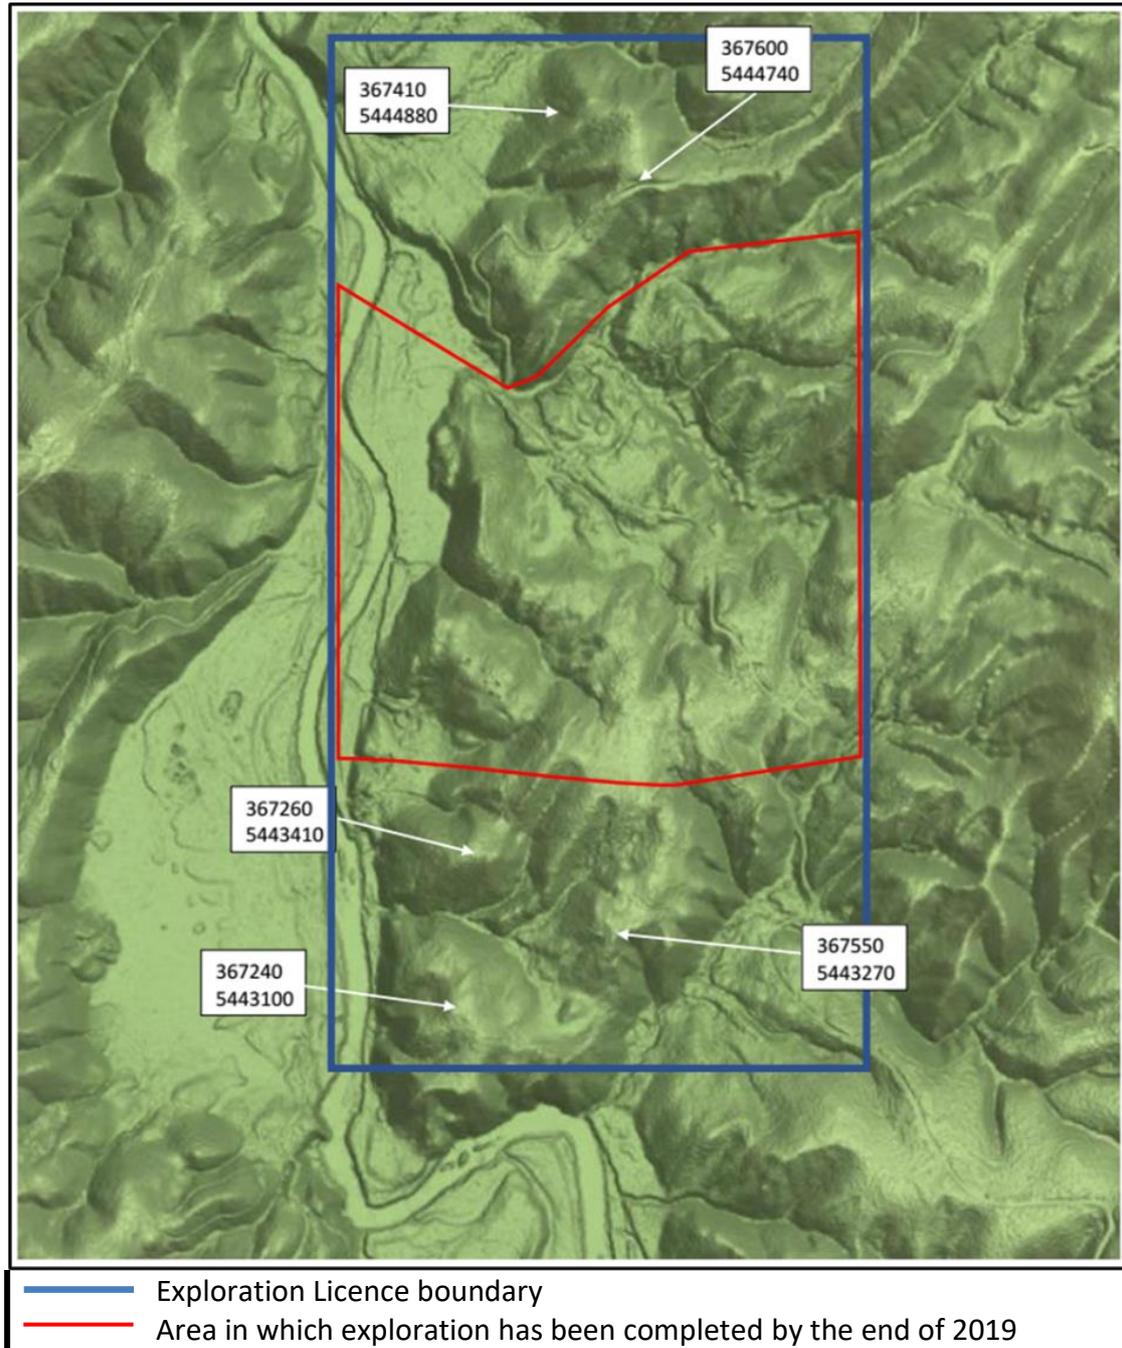

Base map from The List by TASMAPP, © State of Tasmania

3. EXPLORATION COMPLETED DURING THE REPORTING PERIOD

In 2022, the two remaining areas of potential were explored. These areas were the south-western hills located around 367260E, 5443410N and 367240E, 5443100N.

The areas were traversed on foot for indications of the soil type under the layer of matted vegetation and humus. Several fallen tree roots were found, revealing the ground type below the humus layer. In addition, three holes were drilled by hand auger through the top layer.

4. DISCUSSION OF RESULTS

All visual observations indicated that the geology underlying the humus and vegetation largely consists of clay, and is not the type of rock associated with the presence of silica flour.

Figure 4: Clay found by hand auger at 367240E, 54433100N



5. CONCLUSIONS

All potential areas on the licence have been explored. Silica flour is present in some locations but the volume is small, the chemical impurity level is generally too high for processing into a product required by TAM's customers, and the particle size

distribution where good quality silica was found with reasonable depth, was too fine to be commercially viable.

6. ENVIRONMENT

No rehabilitation work was done in the reporting year. The tracks require rehabilitation by pulling back vegetation. These works are planned for January 2023.

EXPENDITURE

Expenditure for the period January to December 2022 is listed below.

Geochemistry/physics	\$	0
Drilling	\$	0
Feasibility Studies	\$	0
Other	\$	1154
Administration	\$	0
Total Costs	\$	<u>1154</u>

REFERENCES

- Threader, V.M. 1990, Annual Report EL24/88 Champion Road.
- Threader, V.M. 1991, Annual Report EL24/88 Champion Road.
- Threader, V.M. 1994, Annual Report EL24/88 Champion Road.
- Threader, V.M. 1995, Annual Report EL24/88 Champion Road.
- Dickson, T.W. 2017, RL2/1996 Champion Road final report on Exploration.
- Stuart, C.C, Rademeyer, M.C., 2019, Annual Report EL15/2017.
- Stuart, C.C, Rademeyer, M.C., 2020, Annual Report EL15/2017.